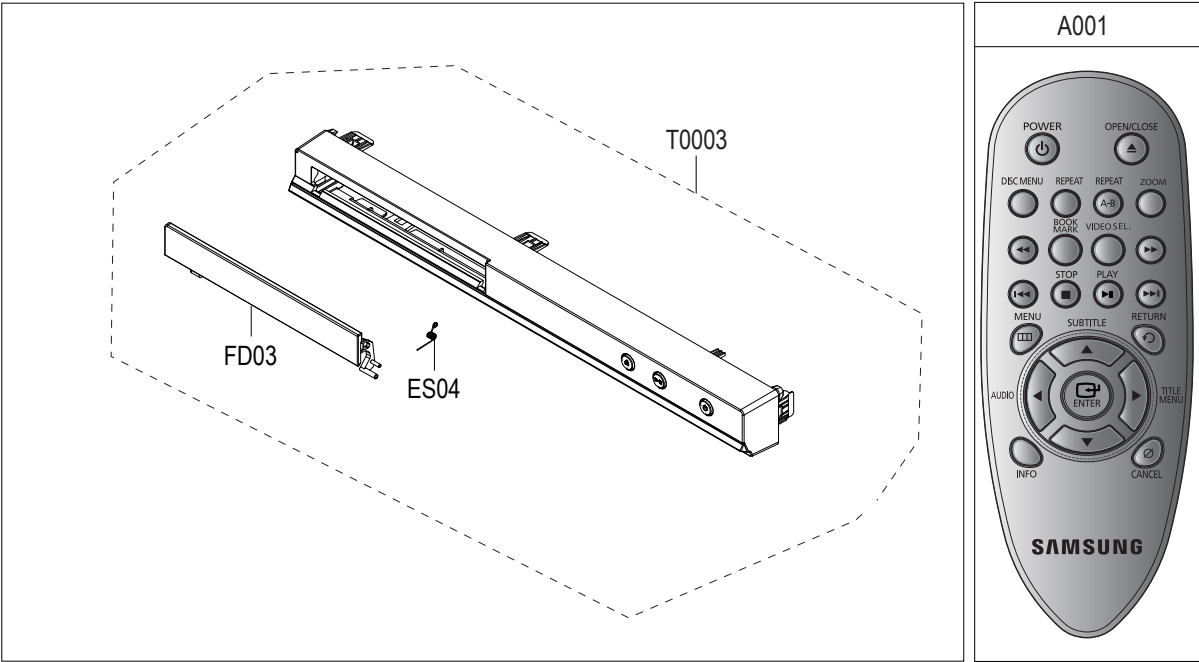
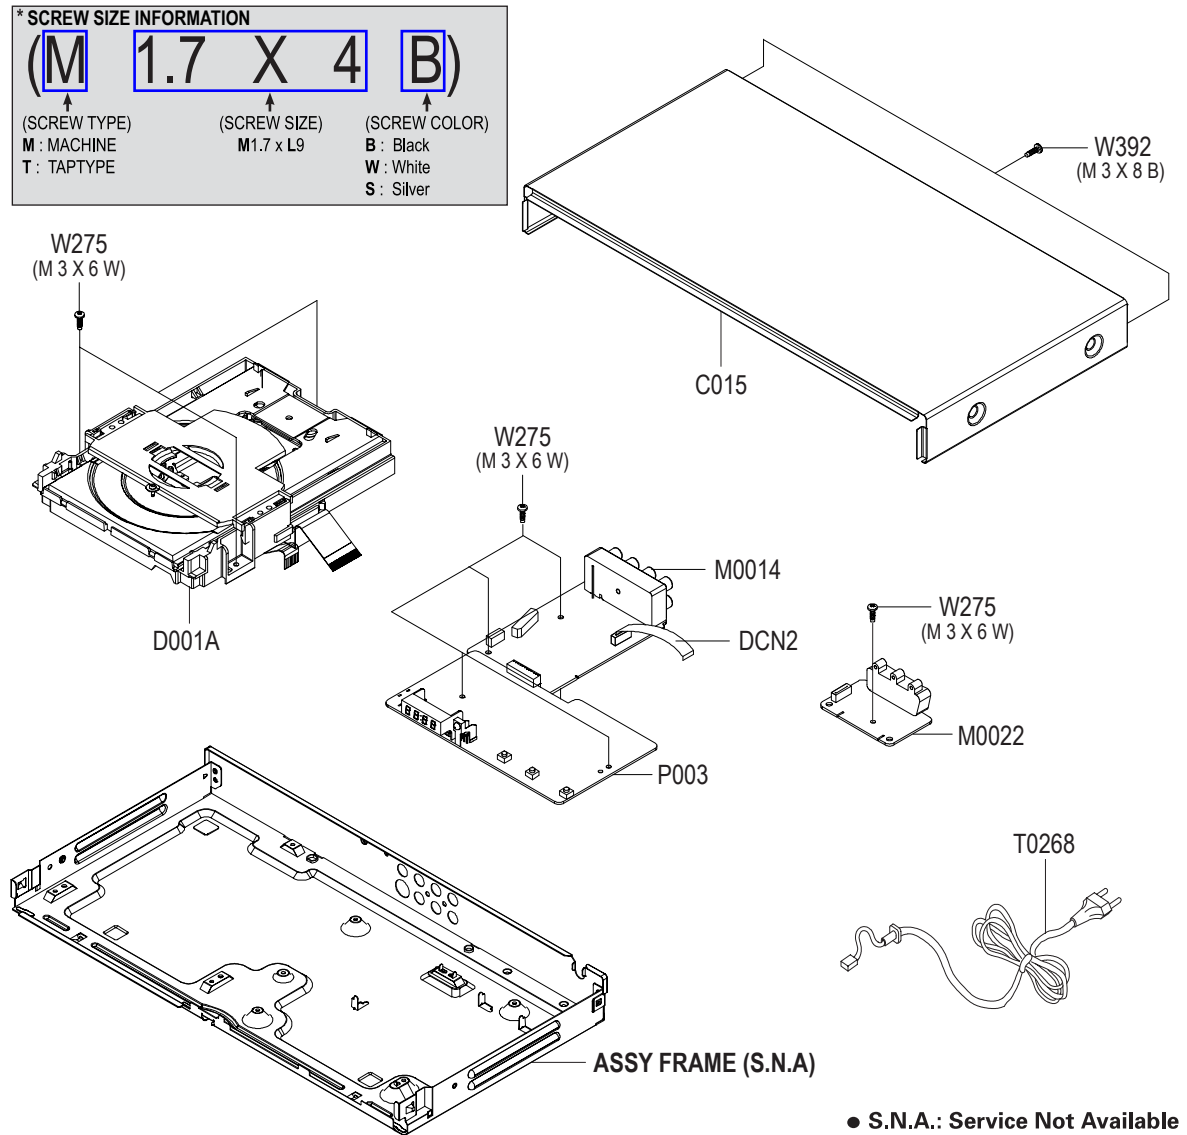

5. Exploded View and Parts List

5-1 Cabinet Assembly----- 5-2

5-2 Electrical Parts List----- 5-4

5-1 Cabinet Assembly



Loc. No	Parts No.	Description / Specification	Qty	SNA	Remark
A001	AK59-00103C	REMOCON-ASSY;DVD-P191,SAMSUNG,120*4	1	SA	
C015	AK64-02449A	CABINET-TOP;DVD-C350/XEL,PCM,T0.45,	1	SA	
D001A	AK96-01029D	ASSY DECK-DVD;DP-26B,Built Door Tra	1	SA	
DCN2	3708-001266	CONNECTOR-FPC/FFC/PIC;11P,1mm,STRAI	1	SA	
ES04	AK61-01023A	SPRING ETC-DOOR;DVD-C350,SUS304WPB,	1	SA	
FD03	AK64-02429A	DOOR-TRAY;DVD-C350,ABS+PMMA,3.2,21.	1	SA	
M0014	AK94-00327W	ASSY PCB MAIN;DVD-C350/EDC,ASSY MAI	1	SA	
M0022	AK94-00271E	ASSY PCB MISC-SCART;DVD-C450/XEF,43	1	SA	
P003	AK94-00265A	ASSY PCB SMPS;DVD-C150,SMPS ASSY,SE	1	SA	
T0003	AK96-01272A	ASSY COVER P-FRONT;DVD-C350,XEL,ABS	1	SA	
T0268	3903-000549	CBF-POWER CORD;AT,EURO,CP2,HOUSING,	1	SA	
W275	6003-001561	SCREW-TAPTYPE;BH,+,-,B,M3,L6,ZPC(WH	8	SA	
W392	6003-000282	SCREW-TAPTYPE;BH,+,-,B,M3,L8,ZPC(BL	2	SA	

5-2 Electrical Parts List

Loc.No	Parts No	Description / Specification	Qty	S.N.A	Remark	Loc.No	Parts No	Description / Specification	Qty	S.N.A	Remark
M0014 AK94-00327W	ASSY PCB MAIN:DVD-C350/EDC ASSY MAI		1	SA		C36	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,100	1	SA	
AC11	2203-002443	C-CER,CHIP;0.33nF,10%,50V,X7R,1005	1	SA		C37	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,100	1	SA	
AC12	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2	1	SC		C38	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,100	1	SA	
AC13	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2	1	SC		C40	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,100	1	SA	
AC14	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2	1	SC		C41	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,100	1	SA	
AC15	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2	1	SC		C42	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,100	1	SA	
AC16	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2	1	SC		C43	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,100	1	SA	
AC17	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2	1	SC		C44	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,100	1	SA	
AC6	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,TP,1005	1	SA		C45	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,100	1	SA	
AC7	2203-002443	C-CER,CHIP;0.33nF,10%,50V,X7R,1005	1	SA		C46	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,100	1	SA	
AC9	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	SA		C47	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,100	1	SA	
AC9A	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	SA		C48	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,100	1	SA	
AQ5	0501-000279	TR-SMALL SIGNAL,KSA1182-Y,PNP,150mW	1	SA		C49	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,100	1	SA	
AR1	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	SA		C50	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,100	1	SA	
AR11	2007-000775	R-CHIP;33Kohm,5%,1/16W,TP,1005	1	SA		C51	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,100	1	SA	
AR12	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	SA		C52	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,100	1	SA	
AR13	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	SA		C53	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,100	1	SA	
AR2	2007-000144	R-CHIP;5.1Kohm,5%,1/16W,TP,1005	1	SA		C54	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,100	1	SA	
AR22	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	SA		C55	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,100	1	SA	
AR23	2007-000139	R-CHIP;220ohm,5%,1/16W,TP,1005	1	SA		C56	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,100	1	SA	
AR24	2007-000139	R-CHIP;220ohm,5%,1/16W,TP,1005	1	SA		C58	2203-002687	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,100	1	SA	
AR25	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	SA		C59	2203-002687	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,100	1	SA	
AR26	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	SA		C60	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,TP,1005	1	SA	
AR27	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	SA		C61	2203-002443	C-CER,CHIP;0.33nF,10%,50V,X7R,1005	1	SA	
AR3	2007-000775	R-CHIP;33Kohm,5%,1/16W,TP,1005	1	SA		C62	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,100	1	SA	
AR4	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	SA		C9	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,100	1	SA	
AR6	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	SA		CN16	3711-001246	HEADER-BOARD TO BOARD,NOWALL,12P,1R	1	SNA	
AR8	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	SA		CN2	3708-000491	CONNECTOR-FPC/FPC/PC/23P,1mm,STRAI	1	SA	
BD10	3301-001419	BEAD-SMD;220ohm,1608,TP,133ohm/70MH	1	SA		CN3	3708-001266	CONNECTOR-FPC/FPC/PC/11P,1mm,STRAI	1	SA	
BD3	3301-001419	BEAD-SMD;220ohm,1608,TP,133ohm/70MH	1	SA		DCN2	3708-001616	CONNECTOR-FPC/FPC/PC/9P,1mm,STRAIG	1	SNA	
BD4	3301-001419	BEAD-SMD;220ohm,1608,TP,133ohm/70MH	1	SA		FC1	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,TP,1005	1	SA	
BD5	3301-001419	BEAD-SMD;220ohm,1608,TP,133ohm/70MH	1	SA		FC2	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,TP,1005	1	SA	
BD6	3301-001309	BEAD-SMD;47ohm,1608,TP,-,-	1	SA		FC3	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,TP,1005	1	SA	
BD7	3301-001419	BEAD-SMD;220ohm,1608,TP,133ohm/70MH	1	SA		FC4	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,TP,1005	1	SA	
BD8	3301-001309	BEAD-SMD;47ohm,1608,TP,-,-	1	SA		FC5	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,TP,1005	1	SA	
BD9	3301-001419	BEAD-SMD;220ohm,1608,TP,133ohm/70MH	1	SA		FLUX	0204-002607	FLUX;DF-234U,13%,14KG,Gravity 0.82	0.911	SNA	
C10	2203-000236	C-CER,CHIP;0.1nF,5%,50V,C0G,1608	1	SA		FR10	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	SA	
C11	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,TP,1005	1	SA		FR4	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	SA	
C12	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,100	1	SA		FR5	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	SA	
C13	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,100	1	SA		FR6	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	SA	
C14	2203-006378	C-CER,CHIP;4700nF,10%,6.3V,X5R,TP,1	1	SA		FR7	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	SA	
C15	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,100	1	SA		FR8	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	SA	
C16	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,100	1	SA		FR9	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	SA	
C17	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,100	1	SA		IC3	1003-001978	IC-MOTOR DRIVER;AM576S,HSOP28H,28P,	1	SNA	
C18	2203-002443	C-CER,CHIP;0.33nF,10%,50V,X7R,1005	1	SA		IC4	1107-001763	IC-NOR FLASH;AT26D081A-SU,8Mbit,1M	1	SNA	
C19	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,100	1	SA		IC5	1201-000163	IC-OP AMP;4560,SOP,8P,173ML,DUAL,1	1	SA	
C20	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,100	1	SA		JACK1	3722-002667	JACK-PIN;7P(8P),NI,WH-BL-BL-GN/RD-	1	SA	
C21	2203-002443	C-CER,CHIP;0.33nF,10%,50V,X7R,1005	1	SA		L1	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	SA	
C23	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,100	1	SA		L2A	2007-000501	R-CHIP;2.2ohm,1%,1/10W,TP,1608	1	SA	
C24	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,TP,1005	1	SA		MC14	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,100	1	SA	
C25	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,TP,1005	1	SA		MC15	2203-006378	C-CER,CHIP;4700nF,10%,6.3V,X5R,TP,1	1	SA	
C26	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,100	1	SA		MC20	2203-000292	C-CER,CHIP;0.01nF,5%,50V,C0G,1608	1	SA	
C27	2203-006378	C-CER,CHIP;4700nF,10%,6.3V,X5R,TP,1	1	SA		MC24	2203-000292	C-CER,CHIP;0.01nF,5%,50V,C0G,1608	1	SA	
C28	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,100	1	SA		MC37	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2	1	SC	
C29	2203-000812	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	SA		MC39	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,100	1	SA	
C30	2203-000812	C-CER,CHIP;0.33nF,5%,50V,C0G,1005	1	SA		MC40	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,100	1	SA	
C31	2203-006378	C-CER,CHIP;4700nF,10%,6.3V,X5R,TP,1	1	SA		MC41	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2	1	SC	
C32	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,100	1	SA		MC42	2203-006378	C-CER,CHIP;4700nF,10%,6.3V,X5R,TP,1	1	SA	
C33	2203-006378	C-CER,CHIP;4700nF,10%,6.3V,X5R,TP,1	1	SA		MC43	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2	1	SC	
C35	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,100	1	SA		MC44	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,100	1	SA	

Loc.No	Parts No	Description / Specification	Qty	S.N.A	Remark	Loc.No	Parts No	Description / Specification	Qty	S.N.A	Remark
MC45	2203-005918	C-CER,CHIP;1000nF,10%,6.3V,X7R,1608	1	SA		R37	2007-000144	R-CHIP;5.1Kohm,5%,1/16W,TP,1005	1	SA	
MC8	2203-005221	C-CER,CHIP;15nF,10%,50V,X7R,1608	1	SA		R38	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	SA	
ME1A	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2	1	SC		R39	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	SA	
ME2A	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2	1	SC		R40	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	SA	
ME3	2401-001479	C-AL;470uF,20%,10V,GP,TP,6.3*11mm,5	1	SA		R41	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	SA	
ME4A	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2	1	SC		R42	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	SA	
ME5	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2	1	SC		R43	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	SA	
ME6A	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2	1	SC		R44	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	SA	
MIC1	1204-003122	IC-DECODER,MT1389J,TR,128P,14x14mm,	1	SA		R45	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	SA	
MIC2	1105-001261	IC-DRAM;12L1616A,16,TSOP,50P,400MIL	1	SNA		R46	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	SA	
MIC4	1203-000469	IC-POSILADJUST REG.;1117,SOT-223,4P	1	SA		R47	2007-007001	R-CHIP;3.9Kohm,5%,1/16W,TP,1005	1	SA	
MR11	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	SA		R48	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	SA	
MR22	2007-001298	R-CHIP;51ohm,5%,1/16W,TP,1005	1	SA		R49	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	1	SA	
MR23	2007-001298	R-CHIP;51ohm,5%,1/16W,TP,1005	1	SA		R51	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	SA	
MR30	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	SA		R8	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	SA	
MR31	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	SA		R9	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	SA	
MR37	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	SA		RC7	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2	1	SC	
MR38	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	SA		RC8	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2	1	SC	
MR39	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	1	SA		RC9	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2	1	SC	
MR5	2007-007156	R-CHIP;1ohm,5%,1/16W,TP,1005	1	SA		RD1	0407-000116	DIODE-SWITCHING;KDS181,DAP202K,SDS2	1	SNA	
MT3	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,100	1	SA		RQ5	0501-000279	TR-SMALL SIGNAL;KSA1182-Y,P,NP,150mW	1	SA	
MT4	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,100	1	SA		RR12	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	SA	
MT5	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2	1	SC		RR13	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	SA	
MTD1	0407-000123	DIODE-SWITCHING;DAN202K,80V,100mA,S	1	SA		RR8	2007-000881	R-CHIP;4.7ohm,5%,1/8W,TP,2012	1	SA	
MTR5	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	SA		S-CREA	0202-001459	SOLDER-CREAM;S3X58-M405,D20-38um,96	0.901	SA	
MTR6	2007-000501	R-CHIP;2.2ohm,1%,1/10W,TP,1608	1	SA		SOLVEN	0204-002420	SOLVENT;1M-1000,C3H7OH,96	0.00097	SNA	
MTR7	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	SA		S-WIRE	0202-001463	SOLDER-WIRE;LFC2-W3.0-.D3,99.79Sn/	0.747	SNA	
MTR8	2007-000501	R-CHIP;2.2ohm,1%,1/10W,TP,1608	1	SA		S-WIRE	0202-001214	SOLDER-WIRE FLUX;HSE04 SR-34 SUPER,	0.095	SNA	
MY1	2801-004279	CRYSTAL-UNIT;27.00MHz,10ppm,28-AAA,	1	SA		S-WIRE	0202-001214	SOLDER-WIRE FLUX;HSE04 SR-34 SUPER,	0.048	SNA	
PCB	AK41-00946A	PCB MAIN;DVD-C150,PHENOL,2L,T1.6,24	0.25	SNA		VC1	2203-000627	C-CER,CHIP;.022nF,5%,50V,COG,TP,100	1	SNA	
Q1	0501-000279	TR-SMALL SIGNAL;KSA1182-Y,P,NP,150mW	1	SA		VC10	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,100	1	SA	
Q2	0501-000341	TR-SMALL SIGNAL;KSC1623-L,NPN,200mW	1	SNA		VC2	2203-000627	C-CER,CHIP;.022nF,5%,50V,COG,TP,100	1	SNA	
Q3	0501-000341	TR-SMALL SIGNAL;KSC1623-L,NPN,200mW	1	SNA		VC3	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,100	1	SA	
Q4	0501-000341	TR-SMALL SIGNAL;KSC1623-L,NPN,200mW	1	SNA		VC4	2203-000627	C-CER,CHIP;.022nF,5%,50V,COG,TP,100	1	SNA	
Q5	0501-000279	TR-SMALL SIGNAL;KSA1182-Y,P,NP,150mW	1	SA		VC5	2203-000627	C-CER,CHIP;.022nF,5%,50V,COG,TP,100	1	SNA	
Q6	0504-000128	TR-DIGITAL;FJV3103R,NPN,200mW,22K/2	1	SA		VC6	2203-000627	C-CER,CHIP;.022nF,5%,50V,COG,TP,100	1	SNA	
Q7	0501-000341	TR-SMALL SIGNAL;KSC1623-L,NPN,200mW	1	SNA		VC7	2203-000627	C-CER,CHIP;.022nF,5%,50V,COG,TP,100	1	SNA	
Q8	0501-000341	TR-SMALL SIGNAL;KSC1623-L,NPN,200mW	1	SNA		VC8	2203-000627	C-CER,CHIP;.022nF,5%,50V,COG,TP,100	1	SNA	
R10	2007-000881	R-CHIP;4.7ohm,5%,1/8W,TP,2012	1	SA		VC9	2203-000627	C-CER,CHIP;.022nF,5%,50V,COG,TP,100	1	SNA	
R11	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	SA		VD1	0401-000008	DIODE-SWITCHING;DAN217,80V,100MA,SO	1	SA	
R12	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	SA		VD2	0401-000008	DIODE-SWITCHING;DAN217,80V,100MA,SO	1	SA	
R14	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	SA		VD3	0401-000008	DIODE-SWITCHING;DAN217,80V,100MA,SO	1	SA	
R15	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	SA		VD4	0401-000008	DIODE-SWITCHING;DAN217,80V,100MA,SO	1	SA	
R16	2007-000155	R-CHIP;27Kohm,5%,1/16W,TP,1005	1	SA		VE1	2401-001479	C-AL;470uF,20%,10V,GP,TP,6.3*11mm,5	1	SA	
R17	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	SA		VE2	2401-001479	C-AL;470uF,20%,10V,GP,TP,6.3*11mm,5	1	SA	
R18	2007-000155	R-CHIP;27Kohm,5%,1/16W,TP,1005	1	SA		VL1	2703-000295	INDUCTOR-SMD;220nH,10%,1608	1	SA	
R19	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	SA		VL2	2703-000295	INDUCTOR-SMD;220nH,10%,1608	1	SA	
R20	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	SA		VL3	2703-000295	INDUCTOR-SMD;220nH,10%,1608	1	SA	
R21	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	SA		VL4	2703-000295	INDUCTOR-SMD;220nH,10%,1608	1	SA	
R22	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	SA		VQ1	0501-000279	TR-SMALL SIGNAL;KSA1182-Y,P,NP,150mW	1	SA	
R23	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	SA		VQ2	0501-000279	TR-SMALL SIGNAL;KSA1182-Y,P,NP,150mW	1	SA	
R24	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	SA		VQ3	0501-000341	TR-SMALL SIGNAL;KSC1623-L,NPN,200mW	1	SNA	
R25	2007-007698	R-CHIP;5.1Kohm,5%,1/16W,TP,1005	1	SA		VQ4	0501-000279	TR-SMALL SIGNAL;KSA1182-Y,P,NP,150mW	1	SA	
R26	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	SA		VQ5	0501-000341	TR-SMALL SIGNAL;KSC1623-L,NPN,200mW	1	SNA	
R27	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	SA		VR1	2007-002970	R-CHIP;56ohm,5%,1/16W,TP,1005	1	SA	
R28	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	1	SA		VR10	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	SA	
R29	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	SA		VR11	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	SNA	
R30	2007-000119	R-CHIP;560ohm,5%,1/10W,TP,1608	1	SA		VR12	2007-001313	R-CHIP;330ohm,5%,1/16W,TP,1005	1	SA	
R31	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	SA		VR13	2007-001313	R-CHIP;330ohm,5%,1/16W,TP,1005	1	SA	
R32	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	SA		VR14	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	SA	
R33	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	1	SA		VR15	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	SA	
R34	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	1	SA		VR16	2007-003022	R-CHIP;62ohm,5%,1/16W,TP,1005	1	SNA	
R35	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	SA		VR18	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	SA	
R36	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	SA							

Exploded Views and Parts List

Loc.No	Parts No	Description / Specification	Qty	S.N.A	Remark	Loc.No	Parts No	Description / Specification	Qty	S.N.A	Remark
VR19	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	SA							
VR2	2007-001313	R-CHIP;330ohm,5%,1/16W,TP,1005	1	SA		PDS31	0402-001195	DIODE-RECTIFIER;F1T4,400V,1A,DO-204	1	SA	
VR20	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	SA		PDS33	0402-001194	DIODE-RECTIFIER;UG2D,200V,2A,DO-15,	1	SA	
						PDS34	0402-000268	DIODE-RECTIFIER;SB360,60V,3A,DO-201	1	SA	
VR21	2007-000113	R-CHIP;33ohm,5%,1/10W,TP,1608	1	SA		PER10	2401-004756	C-AL;15uF,20%,400V,SD,BK,12.5x16,5m	1	SA	
VR3	2007-001313	R-CHIP;330ohm,5%,1/16W,TP,1005	1	SA		PER10A	2401-004756	C-AL;15uF,20%,400V,SD,BK,12.5x16,5m	1	SA	
VR5	2007-001313	R-CHIP;330ohm,5%,1/16W,TP,1005	1	SA							
VR6	2007-001313	R-CHIP;330ohm,5%,1/16W,TP,1005	1	SA		PES31	2401-002463	C-AL;470uF,20%,16V,GP,TP,8x11.5,5	1	SA	
VR7	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	SNA		PES33	2401-003059	C-AL;1000uF,20%,16V,WT,TP,10X16,5	1	SA	
						PES34	2401-000118	C-AL;1000uF,20%,10V,GP,TP,10x12.5,5	1	SA	
VR8	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	SA		PES55	2401-000118	C-AL;1000uF,20%,10V,GP,TP,10x12.5,5	1	SA	
VR9	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	1	SNA		PESS9	2401-002165	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	1	SA	
	AK97-03885A	ASSY AUTO;DVD-C350/EDC,ASSY MAIN,AK	1	SNA							
	AK97-03886A	ASSY SMD;DVD-C350/EDC,ASSY MAIN,AK9	1	SNA		PFD01	3601-001130	FUSE-RADIAL LEAD;250V,1.6A,FAST-ACT	1	SA	
						PIC1	1203-004025	IC-PWM CONTROLLER;ICE3B0365J,DIP,8P	1	SA	
						PIC9	1203-001006	IC-POS;FIXED REG.;78R05,TO-220F,4P	1	SA	
						PICS1	0604-000117	PHOTO-COUPLER;TR,130-260%,200mW,DIP	1	SA	
						PICS2	AC14-12006D	IC;KA431Z,TO-92,TAPING	1	SA	
P003 AK94-00265A	ASSY PCB SMPS;DVD-C150,SMPS ASSY,SE	1	SA			PLS01	AK29-00005A	FILTER LINE NOISE;DVD-P191,UU1014H,	1	SNA	
ADHESI	0201-001791	ADHESIVE-TS;EH-260D,RED,400±30PS,2	0.0072	SA		PLS32	AC27-12001N	COIL CHOKE;RA,K-30,Q80,150KHZ,150KH	1	SA	
AMR1	2007-001010	R-CHIP;51Kohm,5%,1/10W,TP,1608	1	SA		PPS12	2003-001040	R-METAL OXIDE(S);47Kohm,5%,2W,AF,TP	1	SA	
FIC1	1003-002281	IC-LED DRIVER;MC2002,TP,20P,6.5x4.4	1	SA		PRD31	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	1	SA	
FLUX	0204-002607	FLUX;DF-234U,13%,14KG,Gravity 0.82	1.5319	SNA		PRD32	2007-000075	R-CHIP;220ohm,5%,1/10W,TP,1608	1	SA	
JP1	3811-001868	WIRE-NO SHEATH CU;SnCuFe,52mm,GRY	1	SNA							
JP10	3811-001868	WIRE-NO SHEATH CU;SnCuFe,52mm,GRY	1	SNA		PRF10	1404-001361	THERMISTOR-NTC;3ohm,4A,-35mW/C,0uF	1	SA	
JP12	3811-001868	WIRE-NO SHEATH CU;SnCuFe,52mm,GRY	1	SNA		PRF11	2001-000527	R-CARBON;22ohm,5%,1/8W,AA,TP,1.8x3	1	SA	
JP14	3811-001868	WIRE-NO SHEATH CU;SnCuFe,52mm,GRY	1	SNA		PRF17	2001-000708	R-CARBON;39ohm,5%,1/8W,AA,TP,1.8x3	1	SA	
JP17	3811-001868	WIRE-NO SHEATH CU;SnCuFe,52mm,GRY	1	SNA		PRF20	2003-002098	R-METAL OXIDE;1.3ohm,5%,1W,AF,TP,2	1	SA	
						PRS32	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	1	SA	
JP2	3811-001868	WIRE-NO SHEATH CU;SnCuFe,52mm,GRY	1	SNA							
JP3	3811-001868	WIRE-NO SHEATH CU;SnCuFe,52mm,GRY	1	SNA		PRS33	2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	SA	
JP37	3811-001868	WIRE-NO SHEATH CU;SnCuFe,52mm,GRY	1	SNA		PRS34	2007-000516	R-CHIP;2.7Kohm,1%,1/10W,TP,1608	1	SA	
JP4	3811-001868	WIRE-NO SHEATH CU;SnCuFe,52mm,GRY	1	SNA		PTD1	AK26-00042A	TRANS SWITCHING;EE1927S,DVD-P191,FR	1	SNA	
JP5	3811-001868	WIRE-NO SHEATH CU;SnCuFe,52mm,GRY	1	SNA		PVA1	1405-000152	VARISTOR;560V,2500A,14x8.5mm,TP	1	SA	
JP6	3811-001868	WIRE-NO SHEATH CU;SnCuFe,52mm,GRY	1	SNA		PZD21	0403-000713	DIODE-ZENER;MTZJ20B,18.63/17.7V,500	1	SA	
JP7	3811-001868	WIRE-NO SHEATH CU;SnCuFe,52mm,GRY	1	SNA							
KC1	2203-005148	C-CER;CHIP;100nF,10%,16V,X7R,TP,160	1	SA		PZD22	0403-000720	DIODE-ZENER;MTZJ9.1B,8.57/9.01V,500	1	SA	
KC2	2203-000440	C-CER;CHIP;1nF,10%,50V,X7R,1608	1	SA		PZD23	0403-000720	DIODE-ZENER;MTZJ9.1B,8.57/9.01V,500	1	SA	
KD1	0401-000005	DIODE-SWITCHING;1N4148,75V,150mA,DO	1	SA		R1P123	2001-000062	R-CARBON;470ohm,5%,1/4W,AA,TP,2.4x6	1	SA	
						R1P124	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	1	SA	
KD2	0401-000005	DIODE-SWITCHING;1N4148,75V,150mA,DO	1	SA		R1P125	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	1	SA	
KE1	2401-001479	C-AL;470uF,20%,10V,GP,TP,6.3*11mm,5	1	SA							
KE2	2401-002165	C-AL;100uF,20%,16V,GP,TP,6.3x7,5	1	SA		R1P126	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	1	SA	
KIR1	0609-001203	MODULE REMOCON;VERTICAL,15mm,TR,0.8	1	SA		R9	3811-001868	WIRE-NO SHEATH CU;SnCuFe,52mm,GRY	1	SNA	
KL1	2701-000002	INDUCTOR-AXIAL;100UH,10%,4298	1	SA		SOLVEN	0204-002420	SOLVENT;1M-1000,C3H7OH,96	0.00163	SNA	
KML1	AK07-00051C	LED DISPLAY;ZDP-10355G-21,7,4,35X10	1	SA		SW71	3404-001182	SWITCH-TACT;DC12V,50MA,100GF,6.0X6	1	SA	
KR18	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3	1	SA		SW74	3404-001182	SWITCH-TACT;DC12V,50MA,100GF,6.0X6	1	SA	
KR19	2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	1	SA							
KR20	2007-000071	R-CHIP;22ohm,5%,1/10W,TP,1608	1	SA		SW76	3404-001182	SWITCH-TACT;DC12V,50MA,100GF,6.0X6	1	SA	
KR22	2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	1	SA		S-WIRE	0202-001214	SOLDER-WIRE FLUX;HSE04 SR-34 SUPER,	0.0952	SNA	
						W-PLUX	0202-001463	SOLDER-WIRE;LFC2-W3.0,-D3,99.79Sn/	5.032	SNA	
						AK97-03339A	ASSY AUTO;SMPS ASSY,AK94-00265A	1	SNA		
						AK97-03340A	ASSY SMD;SMPS ASSY,AK94-00265A	1	SNA		
MCON1	3710-002036	SOCKET-BOARD TO BOARD;12P,1R,2.5mm,	1	SA		M0022 AK94-00271E	ASSY PCB MISC-SCART;DVD-C450/KEF,43	1	SA		
PBR11	3301-000297	BEAD-AXIAL;25ohm,3.6x1.2x5.7mm,-,TP	1	SNA		AHE10	2401-000414	C-AL;10uF,20%,16V,GP,TP,4x7,5	1	SA	
PCB	AK41-00947A	PCB-SMPS;DVDP W/O KOK,PHENOL,1L,T1	0.5	SNA		AHE20	2401-000414	C-AL;10uF,20%,16V,GP,TP,4x7,5	1	SA	
PCD01	2201-000963	C-CERAMIC,DISC;1NF,20%,400V,Y5U,TP,	1	SA		AHR1	2001-000273	R-CARBON;100Kohm,5%,1/8W,AA,TP,1.8x	1	SA	
PCD02	2201-000963	C-CERAMIC,DISC;1NF,20%,400V,Y5U,TP,	1	SA		AHR2	2001-000273	R-CARBON;100Kohm,5%,1/8W,AA,TP,1.8x	1	SA	
PCD11	2305-001029	C-FILM,LEAD-PEF;10nF,10%,630V,TP,12	1	SA							
PCD13	2201-000129	C-CERAMIC,DISC;0.1nF,10%,1000V,Y5P,	1	SA		AHR5	2001-000515	R-CARBON;220ohm,5%,1/8W,AA,TP,1.8x3	1	SA	
PCF01	2301-002010	C-FILM,MPEF;47nF,10%,275V,BK,12.5x6	1	SA		AHR6	2001-000515	R-CARBON;220ohm,5%,1/8W,AA,TP,1.8x3	1	SA	
PCF02	2301-002010	C-FILM,MPEF;47nF,10%,275V,BK,12.5x6	1	SA		CN04A	3809-002531	FFC CABLE-FLAT;30V,80C,90mm,11P,1.0	1	SA	
PCF11	2401-002608	C-AL;33uF,20%,35V,GP,TP,5x11,5	1	SA		DCN2	3708-001266	CONNECTOR-FPC/FFC/PIC;11P,1mm,STRAI	1	SA	
PCF12	2401-000598	C-AL;1uF,20%,50V,GP,TP,4x7,5	1	SA		FLUX	0204-002607	FLUX;DF-234U,13%,14KG,Gravity 0.82	0.282	SNA	
PCF20	2301-000402	C-FILM,LEAD-PEF;1nF,5%,50V,TP,6x9.5	1	SA							
PCNS2	3711-003380	HEADER-BOARD TO CABLE;1WALL,2P,1R,7	1	SA		JP2	3811-001868	WIRE-NO SHEATH CU;SnCuFe,52mm,GRY	1	SNA	
PCS32	2301-000129	C-FILM,LEAD-PEF;100nF,5%,50V,TP,10X	1	SA		JP4	3811-001868	WIRE-NO SHEATH CU;SnCuFe,52mm,GRY	1	SNA	
PDF13	0402-001195	DIODE-RECTIFIER;F1T4,400V,1A,DO-204	1	SA		JP5	3811-001868	WIRE-NO SHEATH CU;SnCuFe,52mm,GRY	1	SNA	
PDS01	0402-000137	DIODE-RECTIFIER;1N4007,1000V,1A,DO-	1	SA		PCB	AK41-00949A	PCB-SCART;DVDP-Y2010,PHENOL,1L,00,T	0.111	SNA	
PDS02	0402-000137	DIODE-RECTIFIER;1N4007,1000V,1A,DO-	1	SA		SCC18	2202-002037	C-CERAMIC,MLC-AXIAL;100nF,+80-20%,5	1	SA	
PDS03	0402-000137	DIODE-RECTIFIER;1N4007,1000V,1A,DO-	1	SA							
PDS04	0402-000137	DIODE-RECTIFIER;1N4007,1000V,1A,DO-	1	SA							
PDS11	0402-000012	DIODE-RECTIFIER;UF4007,1000V,1A,DO-	1	SA		SCC19	2202-000806	C-CERAMIC,MLC-AXIAL;0.22nF,10%,50V,	1	SA	

Loc.No	Parts No	Description / Specification	Qty	S.N.A	Remark
SCE1	2401-001479	C-AL;470uF,20%,10V,GP,TP,6.3*11mm,5	1	SA	
SCJ1	3722-001359	JACK-SCART;21P,SN,BLK	1	SA	
SCL1	2701-000114	INDUCTOR-AXIAL;10UH,10%,2534	1	SA	
SCL2	2701-000114	INDUCTOR-AXIAL;10UH,10%,2534	1	SA	
SCR15	2001-000666	R-CARBON;33ohm,5%,1/8W,AA,TP,1.8x3.	1	SNA	
SCR16	3811-001868	WIRE-NO SHEATH CU;SnCuFe,52mm,GRY	1	SNA	
SOLVEN	0204-002420	SOLVENT;1M-1000,C3H7OH,96	0.0003	SNA	
S-WIRE	0202-001463	SOLDER-WIRE;LFC2-W3.0,-,D3,99.79Sn/	1.015	SNA	
W-FLUX	0202-001214	SOLDER-WIRE FLUX;HSE04 SR-34 SUPER,	0.0952	SNA	
	AK97-03679A	ASSY AUTO-SCART;DVD-C450/XEF,430 mm	1	SNA	

DO01A AK96-01029D ASSY DECK-DVD;DP-26B,Built Door Tra 1 SA

H102	AK61-00778A	BODY-CLAMPER DISC;DP-21,POM,1.0,4.5	1	SNA	
H212	AK61-00777A	HOLDER-CHUCK;DP-21,ABS,1.6,137.0,87	1	SNA	
H213	AK61-00779A	SPRING ETC-CLAMPER;DP-21,SUS304CSP,	1	SNA	
H233	AK97-02033A	ASSY HOLDER-CHUCK;-;DP-21,-,-	1	SNA	

S.N.A	AK31-00037A	MOTOR DC-LOADING;JQ24-35H440L,DP-21	1	SNA	
S.N.A	AK66-00096A	PULLEY MOTOR;DP-21,POM,GRY,1.9,7.0,	1	SNA	
	0205-001033	GREASE;PL-30G,W050030019	0.5	SNA	
	3809-001839	FFC CABLE-FLAT;30V,80C,217mm,23P,1.	1	SA	
	AK96-01028A	ASSY DECK-TRAVEERCE;DP-26,-,-,-	1	SNA	

	AK96-01258A	ASSY MISC P-HOUSING;DP-26B,BUILT-IN	1	SNA	
	6001-001730	SCREW-MACHINE;BH,+;M1.7,L2.5,ZPC(WH	2	SA	
	6003-001620	SCREW-TAPTYPE;CH,+;B,M1.4,L5,NL PLT	1	SNA	
	6602-001076	BELT-RECTANGULAR;CR,T1.2,4.3%,1.2X2	1	SA	
	AK61-00780A	FRAME-MAIN;DP-21,ABS,BLK,34.0,150.0	1	SNA	

	AK63-00478B	TRAY-DISC;DP-24B,ABS,T6.0,W122.0,L1	1	SNA	
	AK66-00093A	SLIDER-CAM;DP-21,POM,1.8,87.0,20.6,	1	SNA	
	AK66-00094A	GEAR-TRAY;DP-21,POM,0.4(A)0.8(B),8	1	SNA	
	AK66-00095A	GEAR-PULLY;DP-21,POM,0.4,14,19.2(OD	1	SNA	
	AK97-02035C	ASSY PCB DECK-DP-24A;9P,DP-24A,RIGH	1	SA	

	3409-001201	SWITCH-LEVER;5V,1mA,2,72deg	1	SNA	
	AK41-00693B	PCB-DECK;DP-26,PHENOL,1,T1.6,T1.6*1	1	SNA	
	AK41-00706E	FFC-DECK;DP-24A,PITCH1.0,PET,9P,180	1	SNA	
	AK97-02036A	ASSY MOTOR;DP-21,-,-,-	1	SA	

A001 AK59-00103C REMOCON-ASSY;DVD-P191,SAMSUNG,120'4 1 SA

C1	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	1	SA	
C2	2203-005148	C-CER;CHIP;100nF,10%,16V,X7R,TP,160	1	SA	
CASE-B	AK61-00930A	CASE-BOTTOM REMOCON;DVD-H1080,ABS,T	1	SNA	
CASE-T	AK61-00929C	CASE-TOP REMOCON;DVD-P191,ABS,T1.8,	1	SNA	

DOOR-B	AK64-02370A	DOOR-BATTERY REMOCON;DVD-H1080,ABS,	1	SNA	
IC1	AK09-00153F	IC MICOM-REMOCON MCU;NEC,BLANK-OTP,	1	SNA	
LD1	0601-000519	LED-IR;ROUND,5mm,170mW,4V,950nm,TP	1	SNA	
OP1	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	1	SA	
PCB-RM	AK41-00886A	PCB-REMOCON;DVD-H1080,FR1,T1.6,103.	0.25	SNA	

PE-RMC	AC69-30118A	BAG PE;LDPE,T0.08,WHT	1	SNA	
Q1	0501-000534	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,	1	SA	
R1	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	SA	
R2	2007-000071	R-CHIP;22ohm,5%,1/10W,TP,1608	1	SA	
RUBB-K	AK73-00074C	RUBBER-KEY REMOCON;DVD-P191,SILICON	1	SNA	

SPRING	AK61-00932A	SPRING ETC(-);DVD-H1080,SUS304,0.5	1	SNA	
SPRING	AK61-00931A	SPRING ETC+;DVD-H1080,SUS304,0.5,7	1	SNA	
SPRING	AK61-00933A	SPRING ETC-C;DVD-H1080,SUS304,0.5,7	1	SNA	

C015	AK64-02449A	CABINET-TOP;DVD-C350/XEL,PCM,T0.45,	1	SA	
EC21	AC39-22017Z	CABLE-RCA PHONE CORD;1500MM,YEL,15	1	SA	
EC21	AC39-42001U	CABLE-RCA PHONE CORD;DOUBLE	1	SA	
ES04	AK61-01023A	SPRING ETC-DOOR;DVD-C350,SUS304WPB,	1	SA	
FD03	AK64-02429A	DOOR-TRAY;DVD-C350,ABS+PMMA,3.2,21.	1	SA	

Loc.No	Parts No	Description / Specification	Qty	S.N.A	Remark
T0003	AK96-01272A	ASSY COVER P-FRONT;DVD-C350,XEL,ABS	1	SA	
T0268	3903-000549	CBF-POWER CORD;AT,EURO,CP2,HOUSING,	1	SA	
T0511	AK68-01914A	MANUAL USERS;DVD-C350,C350K,C360,C4	1	SA	
W275	6003-001561	SCREW-TAPTYPE;BH,+;B,M3,L6,ZPC(WH	3	SA	
W275	6003-001561	SCREW-TAPTYPE;BH,+;B,M3,L6,ZPC(WH	2	SA	
W275	6003-001561	SCREW-TAPTYPE;BH,+;B,M3,L6,ZPC(WH	1	SA	
W275	6003-001561	SCREW-TAPTYPE;BH,+;B,M3,L6,ZPC(WH	2	SA	
W392	6003-000282	SCREW-TAPTYPE;BH,+;B,M3,L8,ZPC(BL	2	SA	
W392	6003-000282	SCREW-TAPTYPE;BH,+;B,M3,L8,ZPC(BL	1	SA	
W392	6003-000282	SCREW-TAPTYPE;BH,+;B,M3,L8,ZPC(BL	1	SA	

MEMO