


1. Exploded View & Part List

Exploded View

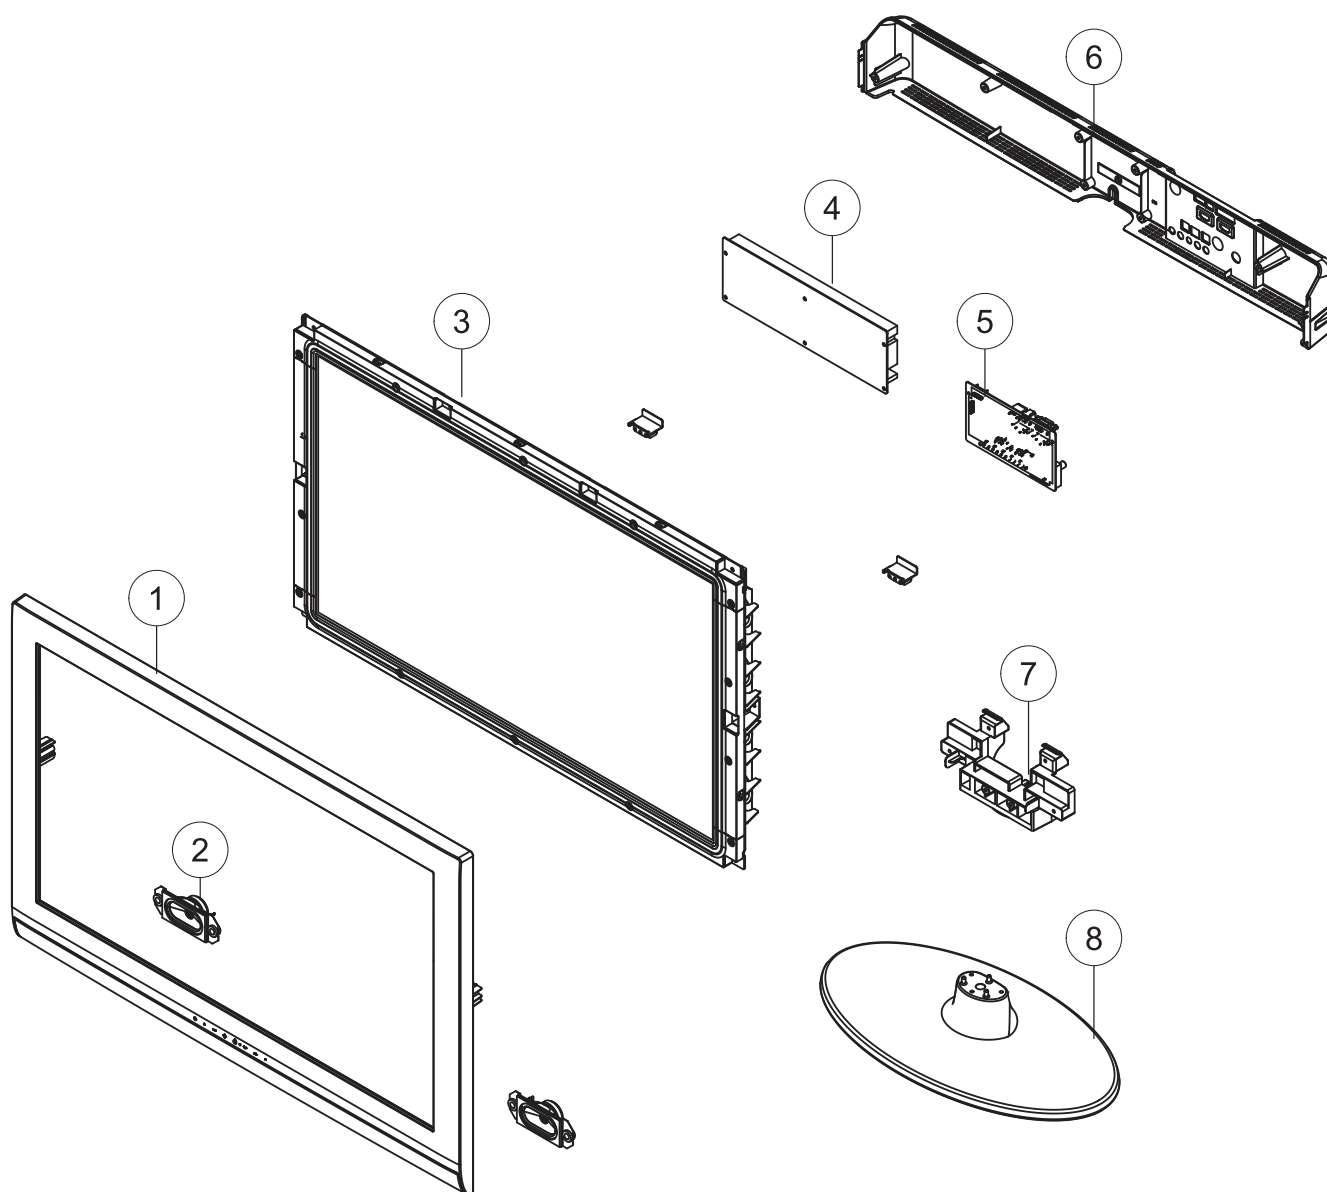

Parts List

No.	Parent	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
1	BN90-02520B	2	F001A	BN96-12859B	ASSY COVER P-FRONT; LC350 32,EO,PC+ABS,V0	SA	1
2	BN96-12859B	3	T0175	BN96-13058A	ASSY SPEAKER P; 16ohm,4pin,5W,L:600 R:150	SA	1
3	BN91-06991A	2	PANEL	BN07-00867D	LCD-PANEL; T315HA01-ED,INC4A11,8bits,32in	SC	1
4	BN91-04869D	2	P001A	BN44-00369B	AC VSS(I)-TV; I32HD_AHS,I32HD_AHS,11mA,12	SA	1
5	BN91-06935A	2		BN94-04645B	ASSY PCB MAIN-ONI; ONI-LE32C350D1WX*	SA	1
6	BN90-02524D	2	R001A	BN96-12867A	ASSY COVER P-REAR; LC350 32,EO,HIPS,V0,BK	SA	1
7	BN91-04869D	2	SG04	BN61-06270A	GUIDE-STAND LINK; LC350 26/32,ABS V0,BK00	SA	1
8	BN90-02527B	2	SB04A	BN96-12870B	ASSY STAND P-BASE; LC350 32,PC+ABS,V0,BK0	SA	1

2. Electrical Parts List

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
			LE32C350D1WXZT (ON09)		
1		BN90-02520B	ASSY COVER FRONT;LC350 32	1	SNA
.2	F001A	BN96-12859B	ASSY COVER P-FRONT;LC350 32,EO,PC+ABS,V0	1	SA
..3	M0081	6006-001096	SCREW-TAPTYPE;BH,+,WP,B,M4.0,L12,ZPC(BLK	3	SNA
..3	CCM1	BN63-05199D	COVER-SHEET;AMBER,PE,T0.08,W75mm,200M,CL	2	SNA
..3	CCM1	BN63-05199G	COVER-SHEET;AMBER,PE,T0.08,W115mm,200M,C	1	SNA
..3	F001	BN63-06676B	COVER-FRONT;LC350 32,EO,PC+ABS,V0,BK0008	1	SNA
..3	C457	BN64-01302A	WINDOW-REMOCON;32LC350,PC,V0,VIOLET	1	SNA
..3	T0175	BN96-13058A	ASSY SPEAKER P;16ohm,4pin,5W,L:600 R:150	1	SA
..3	FB01A	BN96-13063B	ASSY BOARD P-TOUCH FUNCTION & IR;LC350,FR-	1	SA
..3	T0069	BP60-00015R	SPACER-FELT;L450,FELT,L710,BLK,T0.35,W10	2	SNA
1	R001A	BN90-02524D	ASSY COVER REAR;LC350 32	1	SNA
.2	T0081	6002-001294	SCREW-TAPPING;BH,+,M4,L16,ZPC(BLK)	5	SA
.2	R001A	BN96-12867A	ASSY COVER P-REAR;LC350 32,EO,HIPS,V0,BK	1	SA
..3		BN60-00162Y	SPACER-FOAM;FOAM,50000mm,Dark Gray,0.35T	1	SNA
..3	R001	BN63-06696A	COVER-REAR;LC350 32,EO,HIPS,V0,BK0020	1	SNA
...4		0103-004637	RESIN-HIPS;BK0020,V0,HIPS,NoN-Deca,NoN-D	300	SNA
..3	T0071	BN64-01320A	INLAY-TERMINAL;LC350 32,EO,PS SHEET,T0.5	1	SNA
..3	T0139	BN65-00002A	CLAMPER CORE;BORDEAUX,LDPE,BLK	1	SNA
1	S001A	BN90-02527B	ASSY STAND;LC350 32	1	SNA
.2	SB04A	BN96-12870B	ASSY STAND P-BASE;LC350 32,PC+ABS,V0,BK0	1	SA
..3	T0524	6902-000241	BAG PE;HDPE/NITRON,T0.5/T0.012,W600,L600	1	SNA
..3	CCM1	BN63-02183D	COVER-SHEET;Rhcm,PE Vinyl,T0.05,680mm,20	0	SNA
..3		BN63-04755N	COVER-SHEET;32LC350,PE,T0.05,W180mm,200M	1	SNA
..3		BN63-06688B	COVER-STAND BASE;LC350 32,PC+ABS,V0,BK00	1	SNA
...4		0103-005041	RESIN-PC;V0,PC+ABS	577	SNA
..3	M0126	BN73-00052B	RUBBER-FOOT;42Q9,c9,CR Rubber Gray,T3.0	5	SNA
1		BN91-04869D	ASSY SHIELD;LE32C350D1WXXC	1	SNA
.2	CIS1	0203-001598	TAPE-FILAMENT;#8915,0.15,12,55000,CLR	0	SNA
.2	SCREW	6003-001782	SCREW-TAPTYPE;BH,+,B,M4,L12,ZPC(BLK),SWR	19	SA
.2	M2893	BN39-01278A	LEAD CONNECTOR;LC350,Flat Connector Ass'	1	SA
.2	P001A	BN44-00369B	AC VSS(I)-TV;I32HD_AHS,I32HD_AHS,11mA,12	1	SA
..3		BN81-04764A	A/S-MOSFET;MDD3752,QM801,QM803	1	SA
..3		BN81-04769A	A/S-MOSFET;STF13NM60N,QP801,QP802	1	SNA
..3		BN81-04770A	A/S-MOSFET;STF5N52U,QI802,QI808	2	SA
..3		BN81-04780A	A/S-PWM CONTROL IC;ICE3BR0665JZ,ICM801	1	SA
..3		BN81-04784A	A/S-PWM CONTROL IC;LX6523A,ICI801	1	SA
.2	SG04	BN61-06270A	GUIDE-STAND LINK;LC350 26/32,ABS V0,BK00	1	SA

Exploded Views and Parts List

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...3		0103-004627	RESIN-ABS;VE-0812/K2901,BK0020,V0,ABS,No	157	SNA
...2	AC271	BN63-06729A	COVER-MAIN;LC350,32,HIPS,V0,BK0020	1	SNA
...3		0103-004637	RESIN-HIPS;BK0020,V0,HIPS,NoN-Deca,NoN-D	15	SNA
...2	FL06	BN96-12469T	ASSY CABLE P;LE32C350,FFC CABLE,140mm,30	1	SA
...2	EC11	BN96-12845B	ASSY POWER CORD;250/2.5A,LP-21L,H03VVH2F	1	SA
1	M0017	BN91-06935A	ASSY CHASSIS;ONI-LE32C350D1WX*,X4	1	SNA
...2		BN94-04645B	ASSY PCB MAIN-ONI;ONI-LE32C350D1WX*	1	SA
...3		0202-001608	SOLDER-WIRE FLUX;LFC7-107,D0.8,99.3Sn/0.	0	SNA
...3		3701-001480	CONNECTOR-DSUB;15P,3R,FEMAIL,STAMPED PIN	1	SA
...3	CN906	3707-001096	CONNECTOR-OPTICAL;STRAIGHT W/L,SPDIF	1	SA
...3		3709-001600	CONNECTOR-CARD SLOT;68P,1.27mm,stmap,AU,	1	SA
...3	HB01A	3711-007321	HEADER-BOARD TO CABLE;BOX,12P,2R,2mm,STR	1	SA
...3		3711-007585	CONNECTOR-HEADER;BOX,4P,1R,2.5mm,ANGLE-D	1	SA
...3	JA330	3722-003038	JACK-PHONE;7P/1C W/L,SN,BLK	1	SA
...3		3722-003039	JACK-SCART;21P,Sn,BLK	1	SA
...3	JA333	3722-003052	JACK-PIN;5P+Shield W/L,NI/SN,GN/BL/RD/WH	1	SA
...3		3722-003088	JACK-USB;4P/1C,NI/PD/AU/SN,GRY,STRAIGHT,	1	SA
...3	ET01	BN40-00197A	TUNER;DTOS40FVL082A,DTOS40FVL082A,DVB-T/	1	SA
...3		BN97-00688A	ASSY HDCP;BN46-00018A,PS-42V6S,D73A,GENE	1	SNA
...4		BN46-00018A	KEY CODE-CERTIFICATE;(HDCP KEY)PPM42M5S,	1	SNA
...3		BN97-04689A	ASSY DRM;BN46-00028A,LC5F, X4 platform E	1	SNA
...4		BN46-00028A	KEY CODE-CI PLUS;CI PLUS KEY,TCTC,SERIAL	1	SNA
...3		BN97-05548C	ASSY SMD;ONI-LE32C350D1WX*,X4,BN94-04645	1	SNA
...4		0202-001477	SOLDER-CREAM;LST309-M,D20~45um,96.5Sn/3A	2	SNA
...4	DS01A	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	8	SA
...4		0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	SA
...4		0403-001552	DIODE-ZENER;DDZ16,15.69/16.51V,500mW,SOD	1	SA
...4		0403-001783	DIODE-ZENER;BZB84-C6V2,5.8/6.6V,300mW,SO	14	SNA
...4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	2	SA
...4	T0139	0406-001200	DIODE-TVS;RCLAMP0504F,6/-/-V,150W,SC-70	1	SA
...4	SD3	0407-000114	DIODE-SWITCHING;KDS184,80V,100mA,SOT-23,	2	SNA
...4	KQ1	0501-000279	TR-SMALL SIGNAL;KSA1182-Y,PNP,150mW,SOT-	1	SA
...4	Q101	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	12	SA
...4	CEQ2	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	1	SA
...4	Q409	0505-000274	FET-SILICON;AO4435L,P,-30V,-11A,0.014ohm	1	SNA
...4	Q409	0505-002572	FET-SILICON;AO4801AL,P,-30V,-5.6A,0.075o	1	SA
...4	IC104	0801-002630	IC-CMOS LOGIC;74AHCT1G08,2-INPUT AND GAT	1	SA
...4	IC104	0801-003330	IC-CMOS LOGIC;Octal buffer,DQFN,20P,4.5x	2	SA
...4	IC104	0802-001012	IC-CMOS LOGIC;74LCX245,TRANSCEIVER,DQFN,	1	SNA
...4	IC112	1103-000129	IC-EEPROM;24C02,2Kbit,256x8,SOP,8P,5x4mm	2	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4	IC112	1103-001310	IC-EEPROM;24LC02B,256X8BIT,SOIC,8P,3.91X	1	SNA
...4		1103-001487	IC-EEPROM;AT24C256C-SSHL-T,256Kbit,32Kx8	1	SA
...4		1105-002153	IC-DDR2 SDRAM;K4T1G164QF-BCF8,DDR2,1Gbit	2	SNA
...4	T0085	1201-002849	IC-AUDIO AMP;DRV603,TSSOP,14P,5x4.4mm,DU	1	SA
...4		1201-002994	IC-POWER AMP;NTP-7300S,QFN,56P,8x8mm,DUA	1	SA
...4	T0087	1203-001815	IC-POSIFIXED REG.;78M09,TO-252,3P,PLAST	1	SA
...4	T0087	1203-002835	IC-POSIFIXED REG.;7805,3P,6.6x6.1mm,PLA	1	SA
...4	T0087	1203-002898	IC-POSIFIXED REG.;G950T45R,TO-252,3P,6.	1	SA
...4		1203-004364	IC-VOL. DETECTOR;RT9818C-42PV,SOT-23,3P,	1	SA
...4		1203-006013	IC-DC/DC CONVERTER;AOZ1031AI,SO-8,8P,4.9	2	SA
...4		1203-006017	IC-VOL. DETECTOR;RT9824GJ8,TSOT23,8P,2.9	1	SA
...4	IC012	1203-006138	IC-POSIAJUST REG.;AP1117DGZ-13-89,TO-2	1	SA
...4		1203-006142	IC-DC/DC CONVERTER;BD8924G,5P,2.9x1.6x1.	1	SA
...4		1203-006337	IC-POSIFIXED REG.;G9091-330T11U,SOT-23-	1	SA
...4		1204-003197	IC-DECODER;SEMS18-LF,LFBGA,568P,20x20mm,	1	SA
...4		1205-003201	IC-BUS SWITCH;TC7WB125FK,SSOP,8P,2x2.3mm	1	SA
...4		1205-003479	IC-SWITCH;TPS2051BDBVR,SOT-23,5P,2.9x1.6	1	SA
...4		1205-003735	IC-SWITCH;AP2151WG-7,SOT25,5P,2.9x1.6mm,	1	SA
...4		1405-001271	VARISTOR;20Vdc,5A,1.0x0.5x0.6mm,TP	19	SA
...4	KAR21	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	1	SA
...4	PR6	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	4	SA
...4	MR604	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	2	SA
...4	R105	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	26	SA
...4	AR49	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	10	SA
...4	MR306	2007-000141	R-CHIP;2.2Kohm,5%,1/16W,TP,1005	4	SA
...4	AVR73	2007-000142	R-CHIP;2.7Kohm,5%,1/16W,TP,1005	1	SNA
...4	R319	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	45	SNA
...4	R104	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	53	SA
...4	MR36	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	10	SNA
...4	AR43	2007-000155	R-CHIP;27Kohm,5%,1/16W,TP,1005	1	SNA
...4	MR13	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	6	SA
...4	DR39	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	3	SA
...4		2007-000165	R-CHIP;200Kohm,5%,1/16W,TP,1005	1	SNA
...4	R509	2007-000170	R-CHIP;1Mohm,5%,1/16W,TP,1005	1	SA
...4	R111	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	13	SA
...4	HDR17	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	1	SA
...4	R338	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	21	SA
...4	MR39	2007-000242	R-CHIP;1.5Kohm,5%,1/16W,TP,1005	2	SA
...4	R124	2007-000775	R-CHIP;33Kohm,5%,1/16W,TP,1005	2	SA
...4		2007-001285	R-CHIP;5.6ohm,5%,1/16W,TP,1005	2	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4	OTR1	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	37	SA
...4	DR43	2007-001298	R-CHIP;51ohm,5%,1/16W,TP,1005	2	SA
...4	DR1	2007-001301	R-CHIP;68ohm,5%,1/16W,TP,1005	10	SA
...4	R326	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	2	SA
...4		2007-001333	R-CHIP;18Kohm,5%,1/16W,TP,1005	6	SA
...4	PR24	2007-002970	R-CHIP;56ohm,5%,1/16W,TP,1005	16	SA
...4	TR30	2007-007009	R-CHIP;75ohm,5%,1/16W,TP,1005	3	SA
...4	HDR8	2007-007095	R-CHIP;390ohm,5%,1/16W,TP,1005	1	SNA
...4	DR4	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	4	SA
...4		2007-007156	R-CHIP;1ohm,5%,1/16W,TP,1005	3	SA
...4		2007-007317	R-CHIP;2.2Kohm,1%,1/16W,TP,1005	1	SA
...4		2007-007318	R-CHIP;1Kohm,1%,1/16W,TP,1005	4	SNA
...4		2007-007334	R-CHIP;200Kohm,1%,1/16W,TP,1005	1	SA
...4	RR17	2007-007549	R-CHIP;4.99Kohm,1%,1/10W,TP,1608	1	SA
...4	DR157	2007-007650	R-CHIP;274ohm,1%,1/10W,TP,1608	1	SA
...4	R8	2007-007721	R-CHIP;560ohm,1%,1/10W,TP,1608	1	SA
...4	MR11	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	10	SA
...4		2007-008275	R-CHIP;30Kohm,1%,1/16W,TP,1005	1	SNA
...4		2007-008593	R-CHIP;750ohm,1%,1/16W,TP,1005	1	SA
...4	ZRN10	2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	6	SA
...4	DAR09	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	14	SA
...4		2011-001264	R-NETWORK;10ohm,5%,1/16W,L,CHIP,8P,TP,2.	2	SNA
...4	HRP2	2011-001344	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,2	2	SA
...4		2011-001402	R-NETWORK;56ohm,5%,1/16W,L,CHIP,8P,TP,2.	8	SA
...4		2011-001449	R-NETWORK;22ohm,5%,1/16W,L,4P,TP,1010	4	SA
...4		2011-001519	R-NETWORK;33OHM,5%,1/16W,L,CHIP,4P,TP,1.	1	SA
...4		2011-001587	R-NETWORK;100ohm,5%,1/16W,L,CHIP-V,4P,TP	1	SNA
...4	PC43	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,TP,1005	4	SA
...4	MC9	2203-000359	C-CER,CHIP;0.15nF,5%,50V,C0G,TP,1005,0.5	1	SNA
...4	MC302	2203-000425	C-CER,CHIP;0.018nF,5%,50V,C0G,TP,1005	4	SA
...4	C254	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,TP,1005	14	SNA
...4	C507	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,TP,1005	2	SA
...4	FC04	2203-000552	C-CER,CHIP;0.02nF,5%,50V,C0G,1608	2	SA
...4	AD480	2203-000679	C-CER,CHIP;0.027nF,5%,50V,C0G,TP,1005	2	SA
...4	DC25	2203-000812	C-CER,CHIP;0.033nF,5%,50V,C0G,TP,1005	5	SNA
...4	CK40B	2203-000838	C-CER,CHIP;0.39nF,5%,50V,C0G,1608	2	SNA
...4	HDC5	2203-001072	C-CER,CHIP;0.056nF,5%,50V,NP0,1005	2	SA
...4	AD480	2203-001428	C-CER,CHIP;470nF,10%,50V,X7R,TP,2012	4	SNA
...4	AD480	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,TP,1005	13	SNA
...4	AD480	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	6	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4	C33	2203-002687	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,1005	4	SA
...4	AAC1	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	8	SA
...4	AD480	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,0.5T	1	SNA
...4	AD480	2203-005393	C-CER,CHIP;0.005nF,0.1pF,50V,NP0,TP,1005	1	SNA
...4	AD480	2203-005968	C-CER,CHIP;4.7nF,10%,50V,X7R,TP,1005,0.5	3	SNA
...4	AD480	2203-006126	C-CER,CHIP;47nF,10%,16V,X7R,TP,1005	22	SNA
...4	PC11	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,TP,1608,0.	4	SNA
...4	C102	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,TP,1005,0.5	75	SA
...4	AD480	2203-006307	C-CER,CHIP;1000nF,10%,25V,X5R,2012	1	SA
...4	JC10	2203-006324	C-CER,CHIP;2200nF,10%,10V,X5R,1608	7	SA
...4	AD480	2203-006336	C-CER,CHIP;10000nF,10%,25V,X5R,TP,3216	12	SA
...4	C125	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	38	SA
...4	HE4	2203-006474	C-CER,CHIP;22000nF,20%,6.3V,X5R,2012	6	SA
...4	HDC11	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	12	SA
...4	AD480	2203-006824	C-CER,CHIP;4700nF,10%,10V,X5R,1608	1	SNA
...4	AD480	2203-007233	C-CER,CHIP;22000nF,10%,16V,X5R,TP,3216,1	1	SA
...4	T0052	2703-000158	INDUCTOR-SMD;1uH,10%,2012	2	SA
...4	VL6	2703-000398	INDUCTOR-SMD;10uH,10%,3225	2	SA
...4	T0052	2703-001239	INDUCTOR-SMD;3.3uH,10%,1608	2	SA
...4	T0052	2703-003149	INDUCTOR-SMD;2.2uH,20%,5050	2	SA
...4		2703-003407	INDUCTOR-SMD;120nH,5%,1608	1	SA
...4		2703-003890	INDUCTOR-SMD;47uH,10%,3225	1	SA
...4	X202	2801-003326	CRYSTAL-SMD;24MHz,30ppm,28-ABX,20pF,50oh	1	SA
...4	X202	2801-003773	CRYSTAL-SMD;12MHz,30ppm,28-AAN,20pF,50oh	1	SA
...4	F103	2901-001506	FILTER-EMI SMD;5V,0.13A,0pF,2x1x0.5mm,TP	2	SA
...4	T0568	3301-001186	BEAD-SMD;600ohm,3216,2500mA,TP,553ohm/93	4	SA
...4	T0568	3301-001236	BEAD-SMD;60ohm,1608	7	SNA
...4	T0568	3301-002039	BEAD-SMD;26ohm,1608,TP	38	SA
...4		3701-001591	CONNECTOR-HDMI;19P,2ROW,FEMALE,SMD-S,AU	1	SA
...4	AC510	3708-001150	CONNECTOR-FPC/FFC/PIC;30P,1mm,SMD-A,SN,Y	1	SA
...4	HB01A	3711-005941	HEADER-BOARD TO CABLE;BOX,8P,1R,2mm,SMD-	1	SA
...4		BN41-01537A	PCB MAIN;X4_DVB(HALF_NIM)_LCD_35X,FR-4,4	1	SNA
...4		BN97-04662A	ASSY MICOM;N82A,2010.04.12,T-MSX5DEUC-XX	1	SNA
....5		1107-001940	IC-NAND FLASH;KFG1G16U2D-HIB6,1Gbit,64Mx	1	SNA
...4		BN97-04663A	ASSY MICOM;N82A,2010.04.12,X4_Smicom_EU_	1	SNA
....5	IC520	0903-001651	IC-MICROCONTROLLER;61P802-RG480WT,LQFP,4	1	SNA
..3	T0066	BP62-00017A	HEAT SINK-ES;SP-50L2HX,A6063S,T2.0,26.2,	1	SNA
1		BN91-06991A	ASSY LCD-INNOLUX;BN07-00867D	1	SNA
.2	PANEL	BN07-00867D	LCD-PANEL;T315HA01-ED,INC4A11,8bits,32in	1	SC
1		BN92-05484B	ASSY LABEL;LE26C350D1WX*,32	1	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
.2		AA68-03752D	LABEL-STICKER;WW,ALL,Art Paper(90g),44.5	1	SNA
.2	CCM1	BN68-01176A	LABEL RATING;W/W,SS,PET POLYESTER,T0.05,	1	SNA
1		BN92-05556D	ASSY BOX;LC350 32	1	SNA
.2		BH68-00662A	LABEL BOX-00;ALL MODEL,MOJO 90G,60,110,W	1	SNA
.2		BN69-04684D	BOX-SET;32LC350,CB,A-01,SW2,YEL,W1008,D1	1	SNA
1		BN92-05560A	ASSY P/MATERIAL;LC350 32	1	SNA
.2		6902-000061	BAG AIR;LDPE,T0.2,W500,L1000,TRP,370.000	1	SNA
.2		6902-000379	BAG AIR;LDPE,T0.2,W1000,L1800,TRP,1260.0	1	SNA
.2	T0524	6902-000519	BAG PE;HDPE/NITRON,T0.015/T0.5(DOUBLE),W	1	SNA
.2		6902-000604	BAG WRAPPING;LDPE,T0.02,W500,L10000,TRP,	3	SNA
.2		6902-000609	BAG ROLL;LDPE,T0.05,W2400,L1000,TRP,30.0	0	SNA
.2	M040	6922-000013	BAND PP;PP,W18,L2300/L2900,TRP	1	SNA
.2		BN68-02422B	LABEL-WARNING SHIPPING;ALL MODEL,A/P 100	1	SNA
.2		BN69-00391Q	PAD-ANGLE;PAPER,T4,50,1800,YEL	1	SNA
.2	T0246	BN69-04645A	CUSHION-01,SET;32LC350,EPS,16.7g/l	1	SNA
.2		BN74-00008D	TAPE-OPP MASKING;OPP,T0.05,W75,L800M,CLR	2	SNA
1	ACCE1	BN92-05712V	ASSY ACCESSORY;LE26C350D1WXZG,32	1	SNA
.2	ACCE2	BN96-12429C	ASSY ACCESSORY-CABLE;LE22C350D1WXXC	1	SNA
...3	T0120	4301-000121	BATTERY-MN;1.5V,R03,10.5x44.5m,HOLDER,7.	2	SNA
...3	T0524	6902-001107	BAG PE;LDPE,T0.05,W450,L400,TRP,0,3Separ	1	SNA
...3	REMO2	BN59-01005A	REMOCON;TM940,SAMSUNG,20PIN SINGLE,39KEY	1	SA
...3	M9889	BN63-01798B	CLOTH-CLEAN;CLOTH,180,200,sea blue,ToC	1	SNA
...3		BN96-01800K	ASSY ACCESSORY-SCREW ZIPPER;10 LCD-TV,60	1	SNA
...4	T0081	6002-001294	SCREW-TAPPING;BH,+,M4,L16,ZPC(BLK)	3	SA
...4	T0524	6902-001169	BAG PE;LDPE,T0.1,W60,L60,Sealing	1	SNA
.2	ACCE4	BN96-13356N	ASSY ACCESSORY-MANUAL;LE26C350D1WXZG,32	1	SNA
...3	T0524	6902-000110	BAG PE;LDPE,T0.05,W250,L400,TRP,28,2,9.2	1	SNA
...3	T0527	BN68-00513A	LABEL-E,PASS;ALL MODEL,YUPO(110G),50X15,	1	SNA
...3		BN68-00514K	MANUAL FLYER-WARRANTY CARD;comm,Samsung,	1	SNA
...3		BN68-02589K	MANUAL USERS-01;C350,SAMSUNG,4LANGS,ZG Z	1	SNA
...3		BN68-02763B	LEAFLET-STAND GUIDE;L350(26~32),SAMSUNG,	1	SNA
...3		BN68-03019A	LEAFLET-SAFETY GUIDE;ALL,SAMSUNG,28LENGS	1	SNA