


1. Exploded View & Parts List

UE32C5100QW Exploded View

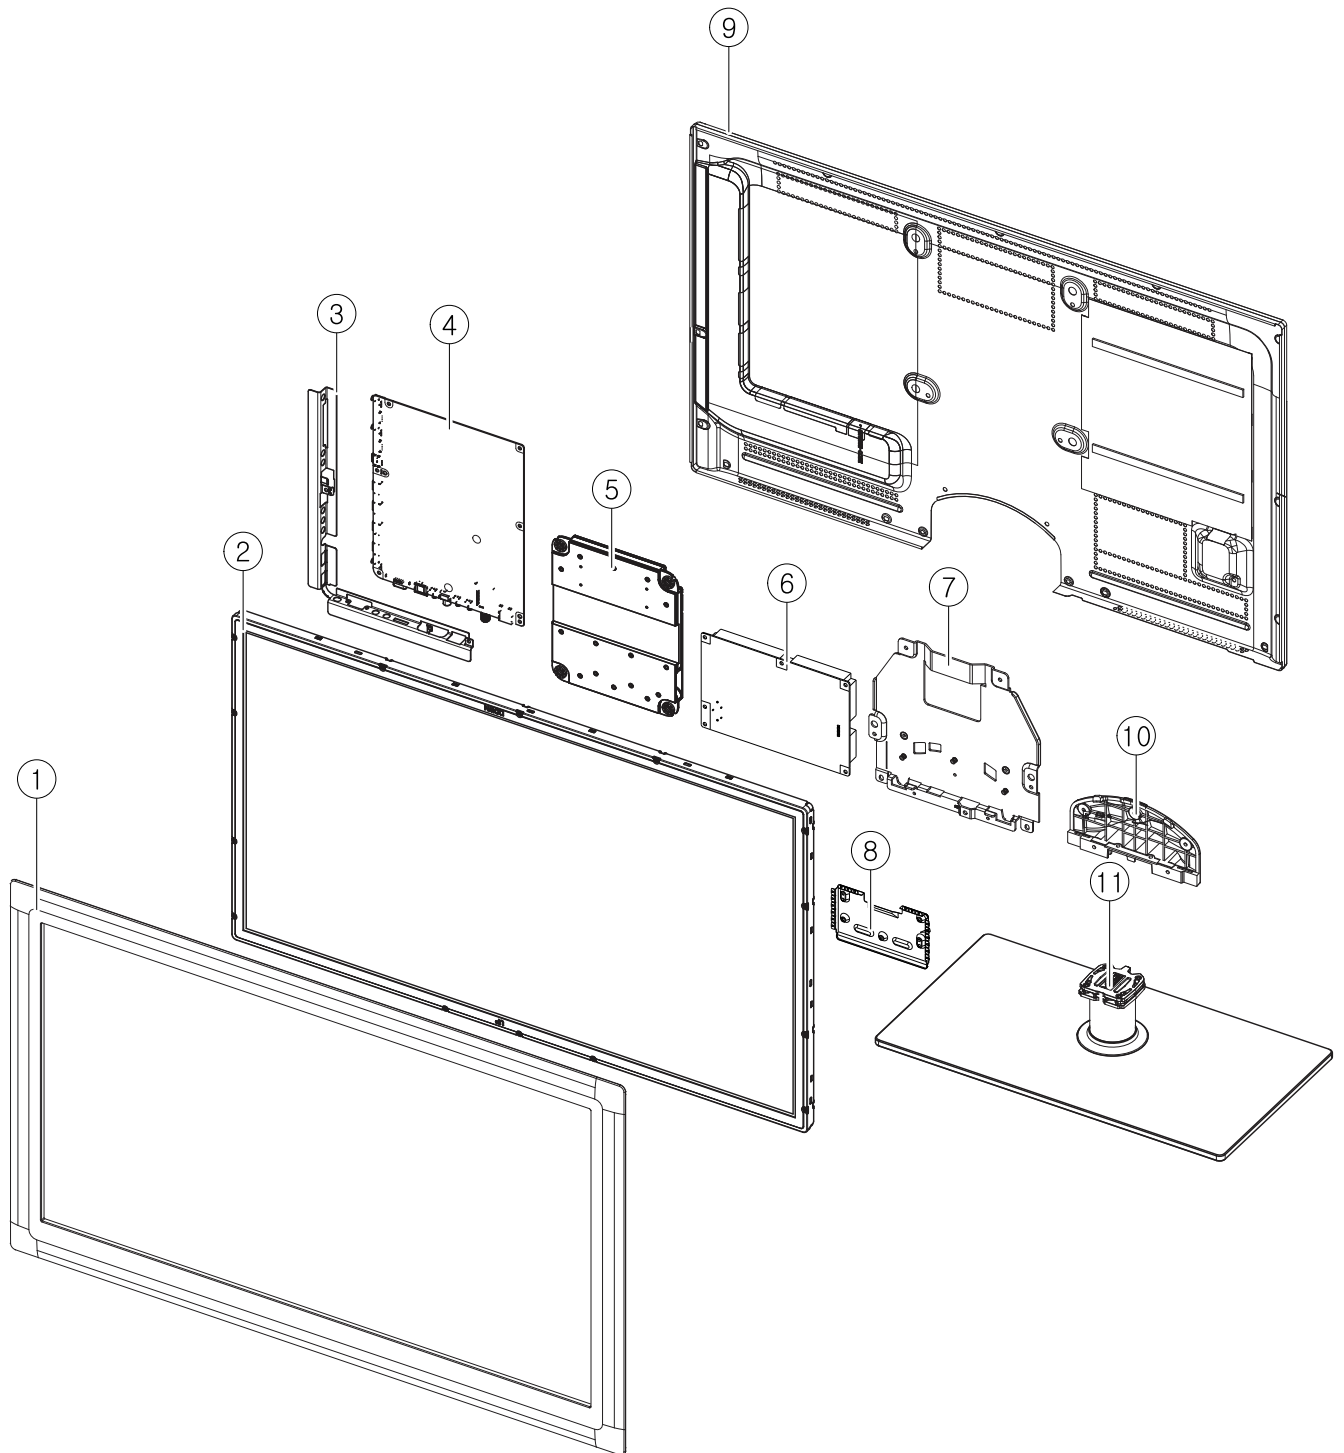

UE32C5100QW Parts List

No.	Parent	Lvl	Loc.	Material Code	Description & Specification	SNA
1	BN90-02528C	2	F001A	BN96-12885B	ASSY COVER P-FRONT; UC5100 32,PC(CLR)+PC(	SA
10	BN90-02557A	2	SC02A	BN96-13392E	ASSY COVER P-GUIDE STAND; UC4000,PC+ABS G	SA
11	BN90-02557A	2	SB04A	BN96-12930A	ASSY STAND P-BASE; UC5000 32,GLASS,T8.0	SA
2	BN91-06025A	2	PANEL	BN07-00915A	LCD-PANEL; LTF320HM02,SSCZMX,8bit,31.5inc	SA
3	BN96-14857A	4	CB01	BN61-04924A	BRACKET-AV; LB700 40,PCM,T0.5,BKN-P824, P	SNA
4	BN91-06041C	2	M0014	BN94-04227D	ASSY PCB MAIN; SQB-UE32C5100QWXXC	SA
5	BN91-05034B	2	T0175	BN96-12944A	ASSY SPEAKER P; 4ohm,4pin,10W,R:170,Encl	SA
6	BN91-05034B	2	P001A	BN44-00351B	DC VSS-LED TV PD BD; PD37AF0E_ZDY,PD37AF0	SA
7	BN91-05034B	2	SB05A	BN96-12927F	ASSY BRACKET P-STAND LINK; UC4000,32,SECC	SA
8	BN07-00915A	3	TCON	BN81-05493A	A/S-T CON LTF320HM02; LTF320HM02	SA
9	BN90-02550C	2	R001A	BN96-12912J	ASSY COVER P-REAR; UC6000 32,EUROPE,PCM,C	SA

1.1. UE32C5100QW Parts List

Level	Location	Part Code	Description & Specification	Qty.	SA/SNA
			UE32C5100QWXXC (SQ04)		
1		BN90-02528C	ASSY COVER FRONT;UC5000 32	1	SNA
2	F001A	BN96-12885B	ASSY COVER P-FRONT;UC5100 32,PC(CLR)+PC(	1	SA
3	CIS1	0203-001598	TAPE-FILAMENT;#8915,0.15,12,55000,CLR	0	SNA
3	AB326	BN61-04661A	BRACKET-STOPPER;L650,SK-5,T0.4,Plating,H	2	SNA
3		BN61-06213A	BRACKET-STOPPER BOSS;C8K,S50C+SECC T1.2	8	SNA
3		BN61-06215A	BRACKET-STOPPER PANEL;C8K,SK5,0.5T	1	SNA
3	CCM1	BN63-05199B	COVER-SHEET;AMBER,PE,T0.08,W65mm,200M,CL	2	SNA
3	F001	BN63-06603B	COVER-FRONT;UC5100 32,PC(CLR)+PC(Charcoa	1	SNA
4		0103-007268	RESIN-PC;TP0010,2.0V0,NH PC,NH PC 2.0 V2	605	SNA
4		0103-007269	RESIN-PC;GY0132,2.0V0,NH PC,NH PC 2.0 V2	385	SNA
3		BN68-02700A	LABEL-LED-POP;Highlight Sticker Color,PE	1	SNA
3	SP01A	BN96-12941E	ASSY SPEAKER P;8ohm,4pin,10,L:270 R:490,	1	SA
3	M0125	BN96-13047B	ASSY BOARD P-TOUCH FUNCTIONUC5000,CT	1	SA
3		BN96-13390A	ASSY HOLDER P-BOSS;UC4000 32,ABS,HB	1	SNA
4		BN61-04692A	BOSS-PRIMER;#94,clear,35cps	1	SNA
4		BN61-05915A	BOSS-TAPE;LB650 65",T1.1,W12.0mm,DARK GR	0	SNA

Level	Location	Part Code	Description & Specification	Qty.	SA/SNA
...4		BN61-05915B	BOSS-TAPE;LB650 65",3M #4711,T1.1,W6.0mm	0	SNA
...4		BN61-06236A	HOLDER-BOSS BOTTOM;UC6100 32inch,ABS,HB	1	SNA
....5		0103-004609	RESIN-ABS;BK0007,HB,ABS,High Flow ABS	44	SNA
..3	T0382	BP61-00495C	HOLDER-CARE;PJT,ACRYL-FOAM,T0.25,W30.0mm	0	SNA
1	R001A	BN90-02550C	ASSY COVER REAR;UC5000 32	1	SNA
..2	R001A	BN96-12912J	ASSY COVER P-REAR;UC6000 32,EUROPE,PCM,C	1	SA
..3	T0069	AA63-60131R	SPACER-FELT;21Z57,FELT,325,T0.35,7	1	SNA
..3		BN60-00162Y	SPACER-FOAM;FOAM,50000mm,Dark Gray,0.35T	0	SNA
..3	R001	BN63-06516D	COVER-REAR;UC6500 32inch,PCM,T0.5,BKN-P8	1	SNA
..3		BN68-02543B	LABEL-TERMINAL BOTTOM;REV.01 UC5000,PET,	1	SNA
..3		BN68-02544B	LABEL-TERMINAL SIDE;Rev.01 UC5000/6000,E	1	SNA
..3		BN96-12924A	ASSY MISC P-INSULATOR;UC6500 32,PC,T0.43	1	SNA
...4	T0278	BN60-00122E	SPACER-SPONGE;UC6500,CR,L200,T2.0,W10	2	SNA
...4		BN63-06629A	SHEET-INSULATOR SMPS;UC6100 32inch,PC,T0	1	SNA
..3	M0909	BP60-00061Q	SPACER-SCREEN;SP20UO,SPONGE,35,T2.0,20,E	2	SNA
..2	T0382	BP61-00495C	HOLDER-CARE;PJT,ACRYL-FOAM,T0.25,W30.0mm	0	SNA
1	S001A	BN90-02557A	ASSY STAND;UC5000 32	1	SNA
..2	SB04A	BN96-12930A	ASSY STAND P-BASE;UC5000 32,GLASS,T8.0	1	SA
..3	M0081	6003-001003	SCREW-TAPTYPE;BH,+,B,M4,L12,ZPC(BLK),SWR	6	SA
..3		BN61-04692A	BOSS-PRIMER;#94,clear,35cps	0	SNA
..3		BN61-04731C	BOSS-TAPE;AMBER,ACRYL,T1.1,W16.0mm,WHITE	0	SNA
..3		BN61-04855C	BRACKET-SWIVEL BOTTOM;UC5000 32",SECC,T2	1	SNA
..3		BN61-05254A	HOLDER-SWIVEL RING BOTTOM;LB700 40,POM H	1	SNA
..3		BN61-05653A	BRACKET-STAND BOTTOM;B650 32,SECC,T2.0	1	SNA
..3		BN61-05826A	BOSS-BOND;#760,Poly urethane,Black	1	SNA
..3	GSN01	BN61-05993A	GUIDE-STAND NECK;32,LC650,PETG,V2,TP0003	1	SNA
...4		0103-007257	RESIN-PETG;ECOZEN-SE,NP01,TP0003,3.2 V2,	99	SNA
...4		BN61-06078B	GUIDE-NECK-INSERT;LC650 32,PETG HB,TP000	1	SNA
..3	CCM1	BN63-04755A	COVER-SHEET;AMBER,PE,T0.05,W150mm,200M,6	1	SNA
..3		BN63-05530E	COVER-STAND GLASS;32,LB650,GLASS,T8.0,1C	1	SNA
..3	T0056	BN63-06908A	COVER-DECORATION;LB700 40,ABS+PMMA,HB,H/	1	SNA
...4		0103-005096	RESIN-ABS;HB,ABS+PMMA	22	SNA
..3	T0527	BN68-01648B	LABEL WARNING;WW,PET,T0.05,40,25,EXPORT	1	SNA
..3	M0126	BN73-00215A	RUBBER-FOOT;40LB650,RUBBER,15*25,T4,BLK	4	SNA
..3		BN73-00300A	RUBBER-FOOT;LC650 40,RUBBER,27*27,BLACK	4	SNA
..3		BN74-00031A	GREASE;kanto-kasei FL-955,grease,wht	0	SNA
..2	SC02A	BN96-13392E	ASSY COVER P-GUIDE STAND;UC4000,PC+ABS G	1	SA
..3	T0524	6902-001048	BAG PE;LDPE,T0.05,W160,L300,TRP,4g	1	SNA
..3	T0920	BN61-06220A	GUIDE-STAND;UC6500 32inch,PC,G/F 20%,V2,	1	SA
...4		0103-007285	RESIN-PC;MW32020GFU,BK0007,2.0 V2,PC/GF2	136	SNA

Level	Location	Part Code	Description & Specification	Qty.	SA/SNA
...3		BN68-02824B	LEAFLET-01,STAND GUIDE;5 ~ 6 series,SAMS	1	SNA
...3		BN96-12031C	ASSY ACCESSORY-SCREW;09 LEDTV,6003-00013	1	SNA
...4		6902-000336	BAG ZIPPER;LDPE,T0.05,W70,L80,TRP,0.500g	1	SNA
...4		BN68-02215H	LEAFLET-STAND GUIDE;B6000 ~ 8000,SAMSUNG	1	SNA
...3		BN96-12031M	ASSY ACCESSORY-SCREW;10 LEDTV(40/46/55),	1	SNA
...4	M0081	6003-001003	SCREW-TAPTYPE;BH,+,B,M4,L12,ZPC(BLK),SWR	5	SA
...4		BN69-04419K	PACKING-BAG PE;UC5000,LDPE,70,90,4X12, 5	1	SNA
1		BN91-05034B	ASSY SHIELD;UE32C5100QWXXC X4	1	SNA
.2	CIS1	0203-001586	TAPE-FILAMENT;#893,0.15,30,55	0	SNA
.2	T0081	6001-000115	SCREW-MACHINE;BH,+,-,M3,L10,ZPC(WHT),SWR	2	SNA
.2	T0081	6001-002283	SCREW-MACHINE;BH,+,M3,L5,ZPC(WHT),SWRCH1	9	SNA
.2	T0081	6001-002610	SCREW-MACHINE;BH,+,M4,L6,ZPC(BLK),SWRCH1	4	SA
.2	SCREW	6003-001782	SCREW-TAPTYPE;BH,+,B,M4,L12,ZPC(BLK),SWR	1	SA
.2	M2893	BN39-01267F	LEAD CONNECTOR;LB6T,UL2651#26,18P,350mm,	1	SA
.2	P001A	BN44-00351B	DC VSS-LED TV PD BD;PD37AF0E_ZDY,PD37AF0	1	SA
...3		BN81-04724A	A/S-DIODE;400V, 2A,DD807,DD406, DD407,D9	1	SA
...3		BN81-04731A	A/S-FUSE;250V, 4.0A,FS801S, FS802S	2	SA
...3		BN81-04744A	A/S-MOSFET;500V, 12A,QP801	1	SA
...3		BN81-04747A	A/S-MOSFET;500V, 5A,Q9105,QD807,Q9106	1	SA
...3		BN81-04775A	A/S-PWM CONTROL IC;650V, 2.8,ICS801	1	SA
.2	M0131	BN63-00209A	GASKET;RS24NS,CONDUCTIVE FAB,4mm,10mm,30	3	SNA
.2	SB05A	BN96-12927F	ASSY BRACKET P-STAND LINK;UC4000,32,SECC	1	SA
...3		BN60-00184A	SPACER-FOAM;FOAM,30000mm,DARK GRAY,1T,30	0	SNA
...3		BN61-02932H	BRACKET-STOPPER NUT;LED-TV,M4,D6,L5.0,BL	2	SNA
...3		BN61-02932K	BRACKET-STOPPER NUT;LED TV,M4,D6,L7.0,BR	3	SNA
...3	M0115	BN61-06163A	BRACKET-STAND LINK;UC6500 32inch,SECC,T2	1	SNA
.2	T0175	BN96-12944A	ASSY SPEAKER P;4ohm,4pin,10W,R:170,Enclo	1	SA
.2	FL06	BN96-13171P	ASSY CABLE P-FFC;UE32C5100,FFC,0.5mm,331	1	SA
1		BN91-06025A	ASSY LCD-AMLCD;BN07-00915A	1	SNA
.2	PANEL	BN07-00915A	LCD-PANEL;LTF320HM02,SSCZMX,8bit,31.5inc	1	SA
...3	TCON	BN81-05493A	A/S-T CON LTF320HM02;LTF320HM02	1	SA
1	M0017	BN91-06041C	ASSY CHASSIS;UE32C5100QWXXC X4 AMLCD	1	SNA
.2	M0014	BN94-04227D	ASSY PCB MAIN;SQB-UE32C5100QWXXC	1	SA
...3		0202-001608	SOLDER-WIRE FLUX;LFC7-107,D0.8,99.3Sn/0.	0	SNA
...3		3701-001698	CONNECTOR-DSUB;15P,3ROW,FEMALE,ANGLE,NI	1	SA
...3		3709-001641	CONNECTOR-CARD SLOT;68P(U/SLIM 60mm) W/L	1	SNA
...3		3711-007583	CONNECTOR-HEADER;BOX,10P,1R,2.0mm,ANGLE-	1	SA
...3		3711-007585	CONNECTOR-HEADER;BOX,4P,1R,2.5mm,ANGLE-D	2	SA
...3		3711-007587	CONNECTOR-HEADER;BOX,18P,2R,2mm,ANGLE-DI	1	SA
...3	JA330	3722-002844	JACK-PHONE;1/7P,NI,LAUREL-GREEN,ANGLE	1	SA

Level	Location	Part Code	Description & Specification	Qty.	SA/SNA
..3	JA330	3722-002845	JACK-PHONE;1/7P,NI,YELLOW,ANGLE	1	SA
..3	JA330	3722-002846	JACK-PHONE;1/6,NI,BLACK,ANGLE	2	SNA
..3		3722-002849	JACK-MODULAR;8P/8C(ULTRA SLIM),YES,ANGLE	1	SNA
..3	ET01	BN40-00196A	TUNER;DTOS40FVH082A,DTOS40FVH082A,DVB-T/	1	SA
..3		BN96-14857A	ASSY BRACKET P-AV;UE5100,EO,PCM,T0.5,BKN	1	SNA
...4	CB01	BN61-04924A	BRACKET-AV;LB700 40,PCM,T0.5,BKN-P824, P	1	SNA
...4	M0131	BN63-01251A	GASKET;NB24BS,CONDUCTIVE FABRIC,0.7mm,12	1	SNA
..3		BN97-00688A	ASSY HDCP;BN46-00018A,PS-42V6S,D73A,GENE	1	SNA
...4		BN46-00018A	KEY CODE-CERTIFICATE;(HDCP KEY)PPM42M5S,	1	SNA
..3		BN97-04689A	ASSY CI PLUS;BN46-00028A,LC5F, X4 platfo	1	SNA
...4		BN46-00028A	KEY CODE-CI PLUS;CI PLUS KEY,TCTC,SERIAL	1	SNA
..3		BN97-05049L	ASSY SMD;SQB-UE32C5100QWXXC,BN94-04227D	1	SNA
...4		0202-001477	SOLDER-CREAM;LST309-M,D20~45um,96.5Sn/3A	4	SNA
...4	DS01A	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	19	SA
...4		0403-001180	DIODE-ZENER;BZX84C6V2,5.8-6.6V,350mW,SOT	1	SA
...4		0403-001783	DIODE-ZENER;BZB84-C6V2,5.8/6.6V,300mW,SO	19	SNA
...4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	2	SA
...4	T0139	0406-001200	DIODE-TVS;RCLAMP0504F,6/-/-V,150W,SC-70	2	SA
...4	T0139	0406-001271	DIODE-TVS;RCLAMP0524P,6/-/-V,150W,SLP251	1	SNA
...4	SD3	0407-000114	DIODE-SWITCHING;KDS184,80V,100mA,SOT-23,	3	SNA
...4	KQ1	0501-000279	TR-SMALL SIGNAL;KSA1182-Y,PNP,150mW,SOT-	1	SA
...4	Q101	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	10	SA
...4	CEQ2	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	4	SA
...4	Q409	0505-000274	FET-SILICON;AO4435L,P,-30V,-11A,0.014ohm	1	SNA
...4	IC104	0801-002630	IC-CMOS LOGIC;74AHCT1G08,2-INPUT AND GAT	1	SA
...4	IC104	0801-003330	IC-CMOS LOGIC;Octal buffer,DQFN,20P,4.5x	2	SA
...4	IC104	0802-001012	IC-CMOS LOGIC;74LCX245,TRANSCEIVER,DQFN,	1	SNA
...4		1006-001474	IC-LINE DRIVER;DRV604PWP,HPSSOP,28P,9.8x	1	SA
...4	IC112	1103-000129	IC-EEPROM;24C02,2Kbit,256x8,SOP,8P,5x4mm	2	SA
...4	IC112	1103-001310	IC-EEPROM;24LC02B,256X8BIT,SOIC,8P,3.91X	4	SNA
...4		1103-001487	IC-EEPROM;AT24C256C-SSHL-T,256Kbit,32Kx8	1	SA
...4		1105-002153	IC-DDR2 SDRAM;K4T1G164QF-BCF8,DDR2,1Gbit	2	SNA
...4		1201-002994	IC-POWER AMP;NTP-7300S,QFN,56P,8x8mm,DUA	2	SA
...4	T0087	1203-001815	IC-POSI.FIXED REG.;78M09,TO-252,3P,PLAST	1	SA
...4	T0087	1203-002835	IC-POSI.FIXED REG.;KIA7805AF,DPAK,3P,6.6	1	SA
...4	T0087	1203-002898	IC-POSI.FIXED REG.;G950T45R,TO-252,3P,6.	1	SA
...4		1203-004364	IC-VOL. DETECTOR;RT9818C-42PV,SOT-23,3P,	1	SA
...4		1203-006013	IC-DC/DC CONVERTER;AOZ1031AI,SO-8,8P,4.9	2	SA
...4		1203-006017	IC-VOL. DETECTOR;RT9824GJ8,TSOT23,8P,2.9	1	SA
...4	IC012	1203-006138	IC-POSI.ADJUST REG.;AP1117DGZ-13-89,TO-2	1	SA

Level	Location	Part Code	Description & Specification	Qty.	SA/SNA
...4		1203-006142	IC-DC/DC CONVERTER;BD8924G,5P,2.9x1.6x1.	1	SA
...4		1203-006337	IC-POSITIVE FIXED REG.;G9091-330T11U,SOT-23-	1	SA
...4		1204-003197	IC-DECODER;SEMS18-LF,LFBGA,568P,20x20mm,	1	SA
...4		1205-003201	IC-BUS SWITCH;TC7WB125FK,SSOP,8P,2x2.3mm	1	SA
...4		1205-003479	IC-SWITCH;TPS2051BDBVR,SOT-23,5P,2.9x1.6	1	SA
...4		1205-003733	IC-SWITCH;AP2191MPG-13,MSOP-8L-EP,8P,2.9	1	SA
...4		1205-003735	IC-SWITCH;AP2151WG-7,SOT25,5P,2.9x1.6mm,	1	SA
...4		1205-003834	IC-ETHERNET CONTROLLER;RTL8201E-VC-GR,QF	1	SA
...4		1405-001271	VARISTOR;20Vdc,5A,1.0x0.5x0.6mm,TP	24	SA
...4	KAR21	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	1	SA
...4	PR6	2007-000072	R-CHIP;47ohm,5%,1/10W,TP,1608	6	SNA
...4	MR604	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	2	SNA
...4	R105	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	27	SA
...4	AR49	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	18	SNA
...4	MR306	2007-000141	R-CHIP;2.2Kohm,5%,1/16W,TP,1005	4	SNA
...4	AVR73	2007-000142	R-CHIP;2.7Kohm,5%,1/16W,TP,1005	1	SNA
...4	R319	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	60	SNA
...4	R104	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	56	SA
...4	MR36	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	9	SNA
...4	AR43	2007-000155	R-CHIP;27Kohm,5%,1/16W,TP,1005	2	SNA
...4	MR13	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	9	SNA
...4	DR39	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	4	SNA
...4		2007-000165	R-CHIP;200Kohm,5%,1/16W,TP,1005	1	SNA
...4	R509	2007-000170	R-CHIP;1Mohm,5%,1/16W,TP,1005	1	SNA
...4	R111	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	12	SNA
...4	HDR17	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	8	SNA
...4	R338	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	22	SNA
...4	UR23	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	2	SNA
...4	MR39	2007-000242	R-CHIP;1.5Kohm,5%,1/16W,TP,1005	3	SNA
...4	R124	2007-000775	R-CHIP;33Kohm,5%,1/16W,TP,1005	2	SNA
...4		2007-001285	R-CHIP;5.6ohm,5%,1/16W,TP,1005	4	SA
...4	OTR1	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	44	SNA
...4	DR43	2007-001298	R-CHIP;51ohm,5%,1/16W,TP,1005	2	SNA
...4	DR1	2007-001301	R-CHIP;68ohm,5%,1/16W,TP,1005	10	SA
...4	R326	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	3	SNA
...4		2007-001333	R-CHIP;18Kohm,5%,1/16W,TP,1005	6	SNA
...4	PR24	2007-002970	R-CHIP;56ohm,5%,1/16W,TP,1005	16	SA
...4	HDR8	2007-007095	R-CHIP;390ohm,5%,1/16W,TP,1005	1	SA
...4	DR4	2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	4	SNA
...4		2007-007156	R-CHIP;1ohm,5%,1/16W,TP,1005	3	SNA

Level	Location	Part Code	Description & Specification	Qty.	SA/SNA
...4		2007-007317	R-CHIP;2.2Kohm,1%,1/16W,TP,1005	1	SA
...4		2007-007318	R-CHIP;1Kohm,1%,1/16W,TP,1005	4	SNA
...4		2007-007334	R-CHIP;200Kohm,1%,1/16W,TP,1005	4	SNA
...4	RR17	2007-007549	R-CHIP;4.99Kohm,1%,1/10W,TP,1608	1	SNA
...4		2007-007617	R-CHIP;2.49Kohm,1%,1/10W,TP,1608	1	SA
...4	DR157	2007-007650	R-CHIP;274ohm,1%,1/10W,TP,1608	1	SA
...4	R8	2007-007721	R-CHIP;560ohm,1%,1/10W,TP,1608	1	SA
...4		2007-007861	R-CHIP;62Kohm,1%,1/16W,TP,1005	2	SA
...4	MR11	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	18	SNA
...4		2007-008275	R-CHIP;30Kohm,1%,1/16W,TP,1005	1	SNA
...4		2007-008593	R-CHIP;750ohm,1%,1/16W,TP,1005	1	SA
...4	ZRN10	2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	6	SA
...4	DAR09	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	14	SA
...4		2011-001264	R-NETWORK;10ohm,5%,1/16W,L,CHIP,8P,TP,2.	8	SNA
...4	HRP2	2011-001344	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,2	2	SA
...4		2011-001402	R-NETWORK;56ohm,5%,1/16W,L,CHIP,8P,TP,2.	8	SA
...4		2011-001449	R-NETWORK;22ohm,5%,1/16W,L,4P,TP,1010	7	SA
...4		2011-001587	R-NETWORK;100ohm,5%,1/16W,L,CHIP-V,4P,TP	1	SNA
...4	PC43	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,TP,1005	5	SA
...4	MC9	2203-000359	C-CER,CHIP;.15nF,5%,50V,C0G,1005	1	SNA
...4	MC302	2203-000425	C-CER,CHIP;.018nF,5%,50V,C0G,TP,1005	4	SA
...4	C254	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,TP,1005	16	SA
...4	C507	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,TP,1005	4	SA
...4	FC04	2203-000552	C-CER,CHIP;.02nF,5%,50V,C0G,1608	4	SNA
...4	V1233	2203-000575	C-CER,CHIP;220nF,10%,25V,X7R,TP,2012	9	SNA
...4	AD480	2203-000679	C-CER,CHIP;.027nF,5%,50V,C0G,1005	2	SA
...4	DC25	2203-000812	C-CER,CHIP;.033nF,5%,50V,C0G,TP,1005	3	SA
...4	CK40B	2203-000838	C-CER,CHIP;.39nF,5%,50V,C0G,1608	3	SNA
...4	HDC5	2203-001072	C-CER,CHIP;0.056nF,5%,50V,NP0,1005	4	SA
...4	AD480	2203-001428	C-CER,CHIP;470nF,10%,50V,X7R,TP,2012	4	SNA
...4	AD480	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,1005	13	SNA
...4	AD480	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	6	SNA
...4	C33	2203-002687	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,1005	6	SA
...4	AAC1	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	14	SNA
...4	AD480	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,-	1	SNA
...4	AD480	2203-005393	C-CER,CHIP;.005nF,0.1pF,50V,NP0,TP,1005	1	SNA
...4	AD480	2203-005968	C-CER,CHIP;4.7nF,10%,50V,X7R,1005	3	SNA
...4	AD480	2203-006039	C-CER,CHIP;1nF,10%,2000V,X7R,3216	2	SA
...4	AD480	2203-006126	C-CER,CHIP;47nF,10%,16V,X7R,TP,1005	24	SNA
...4	PC11	2203-006141	C-CER,CHIP;1000nF,10%,16V,X5R,1608	3	SNA

Level	Location	Part Code	Description & Specification	Qty.	SA/SNA
...4	C102	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,TP,1005	99	SNA
...4	JC10	2203-006324	C-CER,CHIP;2200nF,10%,10V,X5R,1608	9	SA
...4	AD480	2203-006336	C-CER,CHIP;10000nF,10%,25V,X5R,TP,3216	17	SA
...4	C125	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	46	SC
...4	HE4	2203-006474	C-CER,CHIP;22000nF,20%,6.3V,X5R,2012	6	SA
...4	HDC11	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	18	SNA
...4	AD480	2203-006824	C-CER,CHIP;4700nF,10%,10V,X5R,1608	2	SNA
...4	AD480	2203-006841	C-CER,CHIP;1000nF,10%,16V,X5R,TP,1005	2	SNA
...4		2601-001056	TRANS-SMD,PULSE;350UH,-,1:1,1:1,12.7X6.7	1	SA
...4	T0052	2703-000158	INDUCTOR-SMD;1uH,10%,2012	2	SA
...4	VL6	2703-000398	INDUCTOR-SMD;10uH,10%,3225	2	SA
...4	T0052	2703-001239	INDUCTOR-SMD;3.3uH,10%,1608	3	SA
...4	T0052	2703-003149	INDUCTOR-SMD;2.2uH,20%,5050	2	SA
...4	T0052	2703-003150	INDUCTOR-SMD;4.7uH,20%,5050	4	SNA
...4		2703-003296	INDUCTOR-SMD;47uH,10%,2012	1	SNA
...4		2703-003407	INDUCTOR-SMD;120nH,5%,1608	1	SA
...4	T0052	2703-003790	INDUCTOR-SMD;4.7uH,20%,8080	2	SA
...4	X202	2801-003326	CRYSTAL-SMD;24MHz,30ppm,28-ABX,20pF,50oh	1	SA
...4	X202	2801-003773	CRYSTAL-SMD;12MHz,30ppm,28-AAN,20pF,50oh	1	SA
...4	X6	2801-004058	CRYSTAL-SMD;25MHz,30ppm,SMD,20pF,50ohm,T	1	SA
...4	F103	2901-001506	FILTER-EMI SMD;5V,0.13A,0pF,2x1x0.5mm,TP	2	SA
...4	T0568	3301-001236	BEAD-SMD;60ohm,1608	5	SNA
...4	T0568	3301-002039	BEAD-SMD;26ohm,1608,TP	40	SA
...4		3701-001293	CONNECTOR-HDMI;19P,2R,FEMALE,SMD-A,AU	4	SA
...4	CN906	3707-001095	CONNECTOR-OPTICAL;SMD-A(Ultra Slim),SPDI	1	SA
...4	AC510	3708-002797	CONNECTOR-FPC/FFC/PIC;51P,0.50mm,SMD,AU,	1	SA
...4		3710-002276	SOCKET-INTERFACE;24P,1R,0.5mm,SMD-A,AU,B	1	SA
...4		3722-003044	JACK-USB;4P/1C,NL,BLK,SMD-A,A-TYPE	2	SA
...4		BN41-01549B	PCB MAIN;X4 5000 half NIM DVB,FR-4,4,0.0	1	SNA
...4		BN97-04662A	ASSY MICOM;N82A,2010.04.12,T-MSX5DEUC-XX	1	SNA
....5		1107-001940	IC-NAND FLASH;KFG1G16U2D-HIB6,1Gbit,64Mx	1	SNA
...4		BN97-04663A	ASSY MICOM;N82A,2010.04.12,X4_Smicom_EU_	1	SNA
....5	IC520	0903-001651	IC-MICROCONTROLLER;61P802-RG480WT,LQFP,4	1	SNA
...3	T0066	BP62-00017A	HEAT SINK-ES;SP-50L2HX,A6063S,T2.0,26.2,	1	SNA
1		BN92-05577C	ASSY BOX;UC5000 32	1	SNA
.2		BH68-00662A	LABEL BOX-00;ALL MODEL,MOJO 90G,60,110,W	1	SNA
.2		BN69-04859B	BOX-SET;32UC5100-GS,CB,A-01,SW2,YEL,W978	1	SNA
1		BN92-05599A	ASSY P/MATERIAL;UC5000 32	1	SNA
.2		6902-000379	BAG AIR;LDPE,T0.2,W1000,L1800,TRP,1260.0	1	SNA
.2		6902-001104	BAG ROLL;HDPE/HDPE/NITRON,T0.5,W800,L175	3	SNA

Level	Location	Part Code	Description & Specification	Qty.	SA/SNA
.2	M040	6922-000003	BAND PP;PP,T0.8,W18,L1650M,TRP,DA69-9014	1	SNA
.2		BN68-02422B	LABEL-WARNING SHIPPING;ALL MODEL,A/P 100	1	SNA
.2		BN69-00257B	PACKING-PAD;PAPER,CB-SW4,1130,820,YEL,28	1	SNA
.2		BN69-00257P	PACKING-SHEET PALLET;-CB,PEP110/HD,-,12	1	SNA
.2	T0246	BN69-04589A	CUSHION-SET;UC5000 32inch,EPS,M65	1	SNA
.2		BN69-05418A	PACKING-BAG WRAPPING;-LDPE,-,0,019,500,	1	SNA
.2		BN69-05529A	PACKING-PAD-PACKING EDGE;HT-C,PAPER,-,6,	1	SNA
.2		BN69-05563A	PALLET;-WOOD-OTH,1170,990,135,18000,4-w	1	SNA
.2		BN74-00008D	TAPE-OPP MASKING;OPP,T0.05,W75,L800M,CLR	2	SNA
1		BN92-05760A	ASSY LABEL;UE32C5100QFXXC	1	SNA
.2	T0527	BP68-00052B	LABEL-00,RATING;CCTV,TETRON PAPER,T0.05,	1	SNA
1	ACCE1	BN92-05880R	ASSY ACCESSORY;UE32C5100QWXXC X4	1	SNA
.2	ACCE2	BN96-13188B	ASSY ACCESSORY-CABEL;UE32C5100QFXXC	1	SNA
..3	EC11	3903-000525	CBF-POWER CORD;DT,CEE,LP-21L,250V,2.5A,B	1	SA
..3	T0120	4301-000121	BATTERY-MN;1.5V,R03,10.5x44.5m,HOLDER,7.	2	SNA
..3	EC08	BN39-01154C	CBF SIGNAL;Chelsea Slim, STEREO Plug to	1	SA
..3	M0114	BN39-01154F	CBF SIGNAL;UE40B7000WWXXC,24P/20P,30AWG,	1	SA
..3	EC07	BN39-01154H	CBF SIGNAL;UE40B7000WWXXC,RCA 3PIN,30AWG	1	SA
..3	REMO2	BN59-01015A	REMOCON;TM1060,SAMSUNG,20PIN SINGLE,49KE	1	SA
..3		BN61-05596A	HOLDER-WIRE CABLE;LED TV,LDPE,T0.8,L150,	1	SNA
..3	M9889	BN63-01798B	CLOTH-CLEAN;cloth,180,200,sea blue,ToC	1	SNA
..3	RB01	BN63-06542G	COVER-BOTTOM;UC6500 32inch,ABS+PC,V0,BK0	1	SA
...4		0103-007489	RESIN-HIPS;FT875,BK,BK0020,V1,HIPS	70	SNA
..3	EH03A	BN96-10276B	ASSY HOLDER P-RING;09 LEDTV ALL MODEL,AB	1	SA
...4		6902-000683	BAG ZIPPER;LDPE,T0.05,W60,L60,TRP,4-PE M	1	SNA
...4	AH365	BN61-05280A	HOLDER-RING;LB7000 46inch,ABS, HB,gray	4	SNA
..3	EH02A	BN96-10810A	ASSY HOLDER P;09 LEDTV MODEL,NYRON	1	SA
...4	BAG	6902-000031	BAG ZIPPER;LDPE,T0.05,W80,L160,TRP,0,0,4	1	SNA
...4	M0114	BN61-05373A	HOLDER-WIRE;LB7000 46,NYRON	3	SNA
...4		BN61-05491A	HOLDER-WIRE STAND;UB7000 46inch,NYRON	1	SNA
..3		BN96-12031D	ASSY ACCESSORY-SCREW;09 LEDTV(40/46/55),	1	SNA
...4	M0081	6003-000133	SCREW-TAPTYPE;BH,+,-,S,M4,L8,ZPC(BLK),SW	1	SA
...4		BN69-04419E	PACKING-BAG PE;LB650,LDPE,70,90,6003-000	1	SNA
..3		BN96-14099A	ASSY ACCESSORY-CLAMP;10 LEDTV(40/46/55),	1	SNA
...4		AA65-30023A	CLAMPER CORE-CABLE;NYLON-66,BLK	1	SA
...4		BN69-04419J	PACKING-BAG PE;UC5000,LDPE,70,90,Power-C	1	SNA
.2	ACCE4	BN96-13188R	ASSY ACCESSORY-MANUAL;UE32C5100QWXXC X4	1	SNA
..3	T0524	6902-000110	BAG PE;LDPE,T0.05,W250,L400,TRP,28,2,9.2	1	SNA
..3	T0527	BN68-00513A	LABEL-E,PASS;ALL MODEL,YUPO(110G),50X15,	1	SNA
..3		BN68-00514E	LEAFLET-05,WARRANTY CARD;comm,Samsung,17	1	SNA

Level	Location	Part Code	Description & Specification	Qty.	SA/SNA
..3		BN68-02656K	MANUAL USERS-02;C5100,SAMSUNG,6LANGS,XC,	1	SNA
..3		BN68-02839D	LEAFLET-WARRANTY CARD;comm,Samsung,Turki	1	SNA
..3		BN68-03019A	LEAFLET-SAFETY GUIDE;ALL,SAMSUNG,28LENGS	1	SNA
..3		BN68-03019B	LEAFLET-TOC GUIDE;ALL,SAMSUNG,36LENGS,W/	1	SNA