


1. Exploded View & Part List

Exploded View

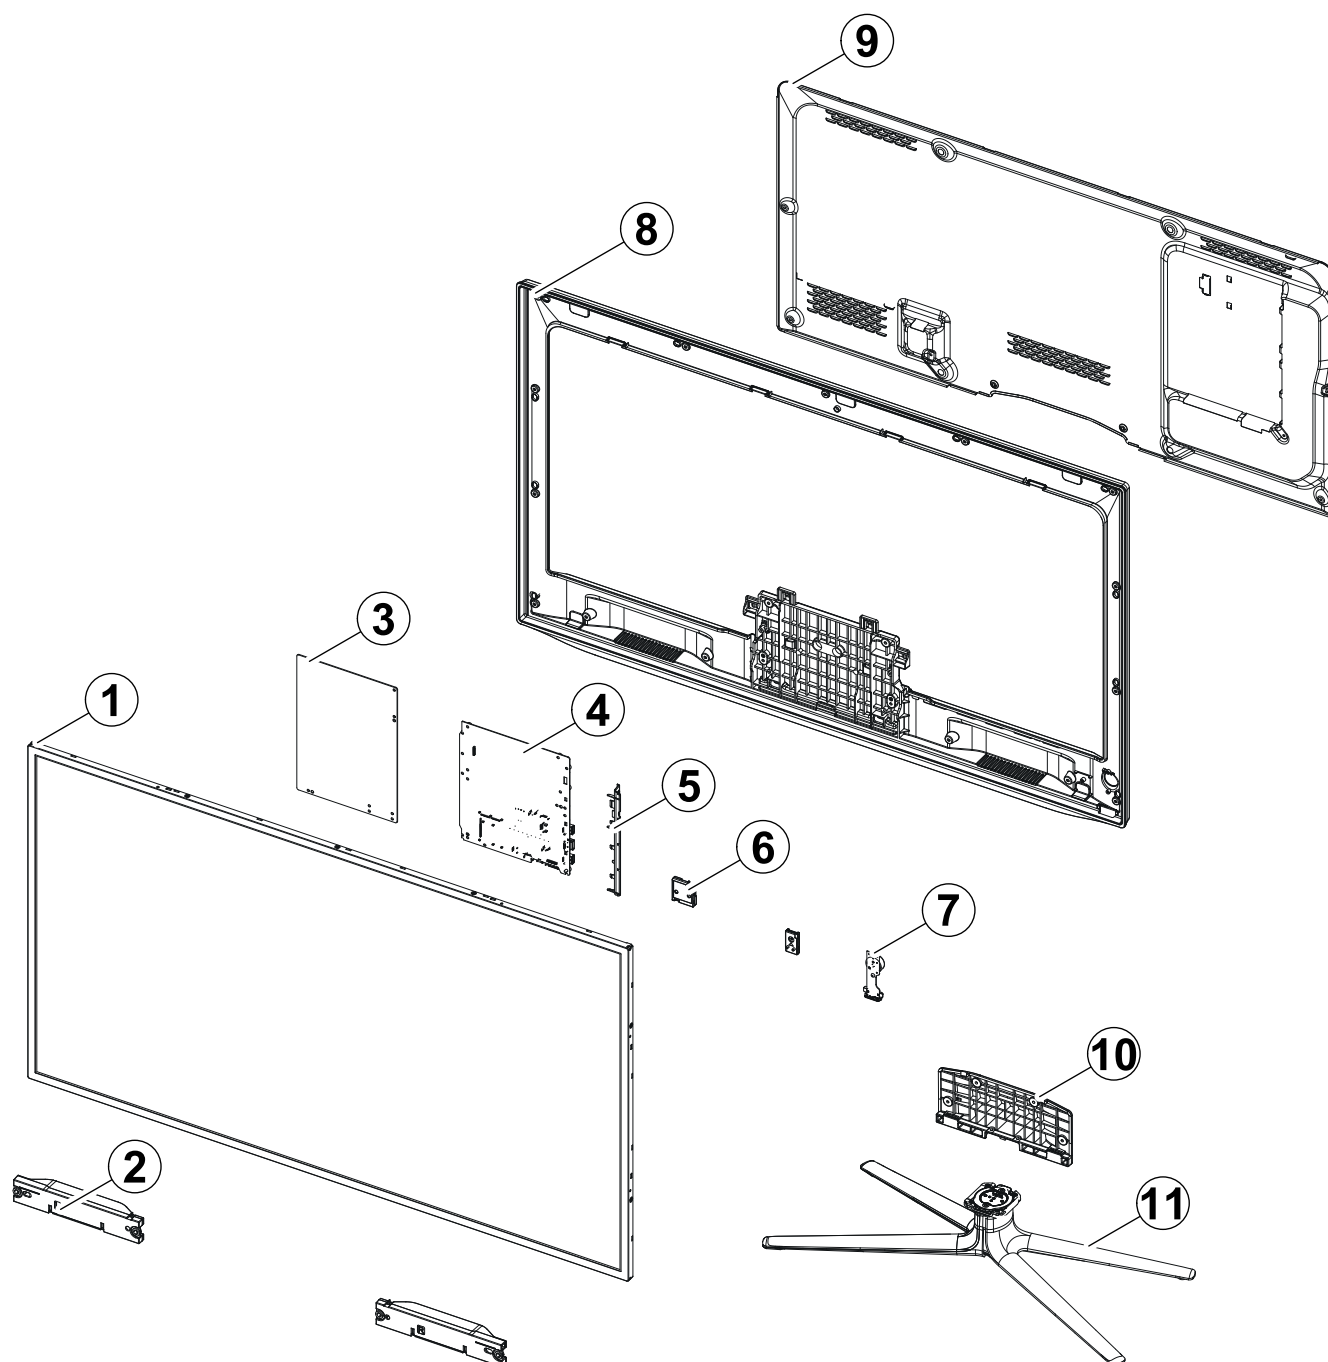

Parts List

No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
1	2	PANEL	BN07-01123A	LCD-PANEL; LE460CSA-B1,BEL7CA1,10 bits,46	SA	1
2	2	SP01A	BN96-21667B	ASSY SPEAKER P; 6ohm,4pin,10W,Enclosure t	SA	1
3	2	P001A	BN44-00518B	DC VSS-LED TV PD BD; PD46B1D_CHS,PD46B1D_	SA	1
4	2	M0014	BN94-06075D	ASSY PCB MAIN; UE40ES6100WXBT	SA	1
5	3		BN61-08037A	HOLDER-SIDE AV; UE6100,ABS,HB,EO,Edge LED	SNA	1
6	2	NW01	BN59-01148B	NETWORK; WIDT-20R,Internal WiFi,USB,IEEE8	SA	1
7	3	FB01A	BN96-22457C	ASSY BOARD P-5WAY SWITCH FUNCTION; UN46ES	SA	1
8	2	M001A	BN96-21902B	ASSY COVER P-MIDDLE; UE6100 46,PC(Cool Gr	SA	1
9	2	R001A	BN96-21882F	ASSY COVER P-REAR; UE6100 46,EUROPE(6.1K)	SA	1
10	2	SG01A	BN96-22770C	ASSY GUIDE P-STAND; UE7000,46,W/W,PC+G/F	SC	1
11	2	SB04A	BN96-16721L	ASSY STAND P-BASE; UE6500 46/55,QUAD,ABS+	SA	1

2. Electrical Parts List

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
			UE46ES6100WXXC (AH05)		
1		BN90-03570B	ASSY COVER MIDDLE;UE6100 46	1	SNA
..2	M001A	BN96-21902B	ASSY COVER P-MIDDLE;UE6100 46,PC(Cool Gr	1	SA
..3	CIS1	0203-001598	TAPE-FILAMENT;#8915,0.15,12,55000,CLR	0	SNA
..3	M0081	6003-000115	SCREW-TAPTYPE;BH,+,B,M3,L6,ZPC(BLK),SWRC	3	SNA
..3	T0069	AA60-00169A	SPACER-FELT;42S4,FELT,248,NTR,T0.5,15	2	SNA
..3		BN63-08608B	COVER-SHEET;Rhcm,PE Vinyl,T 0.04,80MM,20	3	SNA
..3	R002A	BN63-09137B	COVER-MIDDLE;UE6100 46,PC(Cool Gray)+PC(	1	SNA
..4		0103-007678	RESIN-PC ABS;CF210M,6209G,BK0007,V-2	1.5	1070
..4		0103-009658	RESIN-PC;TN-1045M,G01646,TP0059,3.0 V-2	487	SNA
..3		BN74-00052A	TAPE-PAPER;LB550,Crepe Paper,0.18mm, 10m	0	SNA
..3	FB01A	BN96-22457C	ASSY BOARD P-5WAY SWITCH FUNCTION;UN46ES	1	SA
1	R001A	BN90-03778F	ASSY COVER REAR;UE6100 46	1	SNA
..2		6001-002755	SCREW-MACHINE;BH,+,M3,L6,ZPC(BLK),SWRCH1	6	SA
..2	SCREW	6003-001782	SCREW-TAPTYPE;BH,+,B,M4,L12,ZPC(BLK),SWR	3	SA
..2	R001A	BN96-21882F	ASSY COVER P-REAR;UE6100 46,EUROPE(6.1K)	1	SA
..3		BN60-00162V	SPACER-FOAM;FOAM,50000mm,Dark Gray,0.5T,	0	SNA
..3		BN63-08262A	EARTH-PLATE;UD6500,STAINLESS-ST304,0.15	3	SNA
..3		BN63-08448B	GASKET-EMI;51 U/SLIM,Conductive Fabric,1	2	SNA
..3		BN63-09129B	SHEET-INSULATOR SMPS;UE6100,40/46/55,PP,	1	SNA
..3	R001	BN63-09146A	COVER-REAR;UE6700,46,PCM,T0.4,BKN-P824	1	SNA
..3	T0071	BN64-01949F	INLAY-TERMINAL;UE6100,PS SHEET,H/GLOSSY,	1	SNA
..3		BN68-03937A	LABEL-TERMINAL SIDE;UE6100,PET,T0.05,Edg	1	SNA
1	S001A	BN90-03915F	ASSY STAND;UE7000 46	1	SNA
..2	SB04A	BN96-16721L	ASSY STAND P-BASE;UE6500 46/55,QUAD,ABS+	1	SA
..3	T0081	6002-001294	SCREW-TAPPING;BH,+,M4,L16,ZPC(BLK)	9	SA
..3	SCREW	6003-001785	SCREW-TAPTYPE;FH,+,B,M4,L8,ZPC(BLK),SWRC	4	SA
..3		BN61-07159A	HOLDER-SWIVEL,TOP;UD8000 46/55 QUAD,ACET	1	SNA
..3		BN61-07160A	HOLDER-SWIVEL,BOTTOM;UD8000 46/55 QUAD,A	1	SNA
..3		BN61-07161A	BRACKET-STAND,FRONT;UD8000 46 QUAD,HGI,T	1	SNA
..3		BN61-07162A	BRACKET-STAND,REAR;UD8000 46 QUAD,HGI,T3	1	SNA
..3		BN61-07330A	HOLDER-STAND,NECK;UD8000 46 QUAD,PC,G/F	1	SNA
..3		BN61-07739A	BRACKET-SWIVEL,BOTTOM;UD8000 46/55 QUAD,	1	SNA
..3		BN61-07745A	BRACKET-SWIVEL,TOP;UD8000 46"/55" QUAD,S	1	SNA
..3		BN63-05135E	COVER-SHEET;4-LEG,Rhcm PE Vinyl,T0.05,W6	2	SNA
..3		BN63-07922B	COVER-STAND,BASE;UD8000 46,QUAD,ABS+PC,V	1	SNA
..3		BN63-07923D	COVER-STAND,FRONT-RIGHT;UE6100 46/55,QUA	1	SNA
..3		BN63-07924D	COVER-STAND,REAR-RIGHT;UE6100 46/55,QUAD	1	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...3		BN63-07925D	COVER-STAND,FRONT-LEFT;UE6100 46/55,QUAD	1	SNA
...3		BN63-07926D	COVER-STAND,REAR-LEFT;UE6100 46/55,QUAD,	1	SNA
...3		BN67-00385E	RUBBER-FOOT;RUBBER-FOOT,SILICONE,ROUND,1	4	SNA
...3		BN74-00031A	GREASE;SMART F & S FLC-512,GREASE,WHT	1	SNA
...3	T0382	BP61-00495C	HOLDER-CARE;PJT,ACRYL-FOAM,T0.25,W30.0mm	0	SNA
.2	SG01A	BN96-22770C	ASSY GUIDE P-STAND;UE7000,46,W/W,PC+G/F	1	SC
...3	T0524	6902-001063	BAG PE;LDPE,T0.05,W180,L350,TRP,RECYCLE	1	SNA
...3	SG03	BN61-07057A	GUIDE-STAND;UD5000 37,PC+G/F 20%,V2,BK00	1	SNA
...4		0103-007285	RESIN-PC;MW32020GFU,K032202GFV,BK0007,V2	280	SNA
...4		BN68-00513D	LABEL-RESIN;resin,-,art paper,-,10,25,-,	1	SNA
...3		BN68-04186C	MANUAL FLYER-04,STAND GUIDE;UE7000(40/46	1	SNA
...3		BN96-18013E	ASSY ACCESSORY-SCREW;6003-001782,4EA,ALL	2	SNA
...4	SCREW	6003-001782	SCREW-TAPTYPE;BH,+,B,M4,L12,ZPC(BLK),SWR	8	SA
...4		BN69-05418B	PACKING-BAG SCREW;BN96-18013E,CB,-,GREEN	2	SNA
1		BN91-09136V	ASSY SHIELD;UE46ES6100PXZT	1	SNA
.2		6001-002756	SCREW-MACHINE;BH,+,M3,L6,ZPC(WHT),SWRCH1	13	SA
.2		BN02-00102B	TAPE FILAMENT;UE7000,#893,0.15,25,50,WHI	1	SNA
.2	EC13	BN39-01475C	LEAD CONNECTOR;UN46C6400,Falt Connector,	1	SA
.2	EC13	BN39-01646C	LEAD CONNECTOR;UE46ES6100,Cable Connecto	1	SA
.2	P001A	BN44-00518B	DC VSS-LED TV PD BD;PD46B1D_CHS,PD46B1D_	1	SA
.2	NW01	BN59-01148B	NETWORK;WIDT-20R,Internal WiFi,USB,IEEE8	1	SA
.2	FL06	BN96-17116P	ASSY CABLE P-FFC;UN46D6500,FFC,377mm,51P	1	SA
.2	SP01A	BN96-21667B	ASSY SPEAKER P;6ohm,4pin,10W,Enclosure t	1	SA
1		BN91-09174A	ASSY LCD;BN07-01123A	1	SNA
.2	PANEL	BN07-01123A	LCD-PANEL;LE460CSA-B1,BEL7CA1,10 bits,46	1	SA
...3	TCON	BN96-21571A	ASSY T CON P;LE460CSB-B1,10bit (8bit+FRC	1	SA
1	M0017	BN91-10024C	ASSY CHASSIS;UE40ES6100WXBT	1	SNA
.2	M0014	BN94-06075D	ASSY PCB MAIN;UE40ES6100WXBT	1	SA
...3		0202-001608	SOLDER-WIRE FLUX;LFC7-107,D0.8,99.3Sn/0.	0	SNA
...3		BN61-08037A	HOLDER-SIDE AV;UE6100,ABS,HB,EO,Edge LED	1	SNA
...4		0103-005041	RESIN-PC;FR3200TV,901408,BK0008,1.2mm V-	13	SNA
...3		BN62-00094B	HEAT SINK-CERAMIC;30*30*2.5,A6063,T2.6,T	1	SNA
...3		BN97-06430R	ASSY SMD;UE32ES6100P	1	SNA
...4		0202-001477	SOLDER-CREAM;LST309-M,D20~45um,96.5Sn/3A	8	SNA
...4	DS01A	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	2	SA
...4		0403-001783	DIODE-ZENER;BZB84-C6V2,5.8/6.6V,300mW,SO	3	SNA
...4	D0254	0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	2	SA
...4	T0139	0406-001200	DIODE-TVS;RCLAMP0504F,6/-/-V,150W,SC-70	3	SA
...4	T0139	0406-001271	DIODE-TVS;RCLAMP0524P,6/-/-V,150W,SLP251	1	SNA
...4	KQ1	0501-000279	TR-SMALL SIGNAL;KSA1182-Y,PNP,150mW,SOT-	1	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4	Q101	0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	3	SC
...4	CEQ2	0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	4	SA
...4		0505-002598	FET-SILICON;AP2317GN,P,-20V,-4.2A,0.052o	1	SA
...4	IC104	0801-002630	IC-CMOS LOGIC;74AHCT1G08,2-INPUT AND GAT	1	SA
...4	ND51C2	0801-002780	IC-CMOS LOGIC;74LVC1G17,SCHMITT-TRIGGER	1	SA
...4	IC104	0801-003330	IC-CMOS LOGIC;Octal buffer,DQFN,20P,4.5x	3	SA
...4	IC104	0802-001012	IC-CMOS LOGIC;74LCX245,TRANSCEIVER,DQFN,	1	SNA
...4		0904-002714	IC-USC;QFN,28P,5.0mm X 5.0mm,12MHz,TP,PL	1	SA
...4	IC112	1103-001310	IC-EEPROM;2Kbit,256x8,SOIC,8Z30,5x4mm,2.	4	SNA
...4		1103-001487	IC-EEPROM;AT24C256C-SSHL-T,256Kbit,32Kx8	1	SA
...4		1105-002253	IC-DDR3 SDRAM;K4B2G1646C-HCK0,DDR3 SDRAM	3	SA
...4		1201-003183	IC-AUDIO AMP;DRV612,HTSSOP,14P,5x4.4mm,D	1	SA
...4		1201-003333	IC-POWER AMP;NTP-7412S,MLF,48P,7x7mm,DUA	1	SA
...4		1203-004364	IC-VOL. DETECTOR;RT9818C-42PV,SOT-23,3P,	1	SA
...4		1203-006017	IC-VOL. DETECTOR;RT9824GJ8,TSOT23,8P,2.9	1	SA
...4	T0087	1203-006109	IC-POSIFIXED REG.;S-1206B33-M3T1G,SOT-2	1	SA
...4	T0087	1203-006130	IC-POSIFIXED REG.;S-1172B25-U5T1G,SOT-8	1	SA
...4	T0087	1203-006135	IC-POSIFIXED REG.;AP1117D-33-GZ-13-89,T	1	SA
...4	T0087	1203-006136	IC-POSIFIXED REG.;AP1117D-18-GZ-13-89,T	1	SA
...4	IC012	1203-006138	IC-POSILADJUST REG.;AP1117DGZ-13-89,TO-2	1	SA
...4		1203-007080	IC-DC/DC CONVERTER;AOZ1051PI,SO-8,8P,4.9	1	SA
...4		1203-007238	IC-PWM CONTROLLER;TPS54427,DDA,8P,4.8x3.	2	SNA
...4		1203-007242	IC-POSILADJUST REG.;G2992BP11U,SOP-8,8P,	1	SA
...4		1203-007249	IC-SWITCH CUR. REG.;TPS62561DDC,DDA,5P,3	1	SA
...4		1204-003351	IC-DECODER;SEMS27,PBGA,717P,23x23mm,PLAS	1	SNA
...4		1205-003733	IC-SWITCH;AP2191MPG-13,MSOP-8L-EP,8P,2.9	1	SA
...4		1205-004447	IC-SWITCH;TPS2051CDBVR,SOT23-5,5P,3x1.65	3	SA
...4		1405-001271	VARISTOR;35V,20Vdc,5A,1.0x0.5x0.6mm,TP,1	26	SA
...4	MR604	2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	11	SNA
...4	R105	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	9	SA
...4	AR49	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	8	SNA
...4	AVR73	2007-000142	R-CHIP;2.7Kohm,5%,1/16W,TP,1005	1	SNA
...4	R319	2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	33	SNA
...4	R104	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	38	SA
...4	MR36	2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	4	SNA
...4	AR43	2007-000155	R-CHIP;27Kohm,5%,1/16W,TP,1005	1	SNA
...4	MR13	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	15	SNA
...4	R509	2007-000170	R-CHIP;1Mohm,5%,1/16W,TP,1005	1	SNA
...4	R111	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	18	SNA
...4	HDR17	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	3	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4	R338	2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	5	SNA
...4	UR23	2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	2	SNA
...4		2007-000336	R-CHIP;120Kohm,1%,1/10W,TP,1608	1	SA
...4	PR6	2007-000583	R-CHIP;22Kohm,1%,1/10W,TP,1608	1	SA
...4	R726	2007-000695	R-CHIP;3.3ohm,5%,1/10W,TP,1608	4	SNA
...4	R124	2007-000775	R-CHIP;33Kohm,5%,1/16W,TP,1005	1	SNA
...4	R2007	2007-000803	R-CHIP;36Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-000816	R-CHIP;390Kohm,1%,1/10W,TP,1608	1	SNA
...4	DR6	2007-000831	R-CHIP;39Kohm,5%,1/16W,TP,1005	1	SA
...4	DR37	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	SNA
...4	VR88	2007-001116	R-CHIP;680ohm,1%,1/10W,TP,1608	1	SA
...4	S1G0843	2007-001125	R-CHIP;68Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-001168	R-CHIP;75ohm,5%,1/4W,TP,3216	1	SA
...4	OTR1	2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	12	SNA
...4	DR43	2007-001298	R-CHIP;51ohm,5%,1/16W,TP,1005	2	SNA
...4	DR1	2007-001301	R-CHIP;68ohm,5%,1/16W,TP,1005	7	SA
...4	R16	2007-001313	R-CHIP;330ohm,5%,1/16W,TP,1005	2	SNA
...4	R326	2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	SNA
...4	PR24	2007-002970	R-CHIP;56ohm,5%,1/16W,TP,1005	4	SA
...4		2007-003022	R-CHIP;62ohm,5%,1/16W,TP,1005	26	SNA
...4	AVR05	2007-003112	R-CHIP;27ohm,5%,1/16W,TP,1005	1	SNA
...4	DR8	2007-007001	R-CHIP;3.9Kohm,5%,1/16W,TP,1005	1	SA
...4	HDR8	2007-007095	R-CHIP;390ohm,5%,1/16W,TP,1005	1	SA
...4	R365	2007-007107	R-CHIP;100Kohm,1%,1/16W,TP,1005	3	SNA
...4		2007-007132	R-CHIP;15Kohm,1%,1/16W,TP,1005	1	SA
...4		2007-007135	R-CHIP;18Kohm,1%,1/16W,TP,1005	6	SNA
...4		2007-007138	R-CHIP;27Kohm,1%,1/16W,TP,1005	1	SNA
...4		2007-007139	R-CHIP;47Kohm,1%,1/16W,TP,1005	1	SA
...4		2007-007156	R-CHIP;1ohm,5%,1/16W,TP,1005	4	SNA
...4		2007-007311	R-CHIP;22Kohm,1%,1/16W,TP,1005	1	SA
...4		2007-007313	R-CHIP;6.8Kohm,1%,1/16W,TP,1005	1	SA
...4		2007-007318	R-CHIP;1Kohm,1%,1/16W,TP,1005	16	SNA
...4		2007-007463	R-CHIP;1.1Kohm,1%,1/16W,TP,1005	1	SA
...4		2007-007517	R-CHIP;240ohm,1%,1/16W,TP,1005	3	SNA
...4		2007-007538	R-CHIP;56Kohm,1%,1/16W,TP,1005	1	SA
...4		2007-007698	R-CHIP;5.1Kohm,1%,1/16W,TP,1005	1	SNA
...4	MR11	2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	8	SNA
...4		2007-008142	R-CHIP;511Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-008275	R-CHIP;30Kohm,1%,1/16W,TP,1005	1	SNA
...4		2007-008298	R-CHIP;49.9ohm,1%,1/16W,TP,1005	4	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		2007-008649	R-CHIP;220ohm,1%,1/16W,TP,1005	1	SNA
...4	ZRN10	2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	2	SA
...4	DAR09	2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	SA
...4	HRP2	2011-001344	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,2	2	SA
...4	DRP29	2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	SA
...4		2011-001449	R-NETWORK;22ohm,5%,1/16W,L,4P,TP,1010	5	SA
...4		2011-001506	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,4P,TP,1	7	SNA
...4		2011-001519	R-NETWORK;33OHM,5%,1/16W,L,CHIP,4P,TP,1.	1	SA
...4		2011-001527	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,4P,TP,	6	SNA
...4		2011-001587	R-NETWORK;100ohm,5%,1/16W,L,CHIP-V,4P,TP	5	SNA
...4	PC43	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,TP,1005	7	SA
...4	MC9	2203-000359	C-CER,CHIP;0.15nF,5%,50V,C0G,TP,1005,0.5	1	SNA
...4	DC1	2203-000386	C-CER,CHIP;0.015nF,5%,50V,C0G,TP,1005	2	SA
...4	C254	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,TP,1005	12	SA
...4	C507	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,TP,1005	5	SA
...4	AD480	2203-000530	C-CER,CHIP;2.7nF,10%,50V,X7R,TP,1005,-	2	SNA
...4	V1233	2203-000575	C-CER,CHIP;220nF,10%,25V,X7R,TP,2012	3	SNA
...4	AD480	2203-000679	C-CER,CHIP;0.027nF,5%,50V,C0G,TP,1005	5	SA
...4	AD480	2203-000714	C-CER,CHIP;3.3nF,10%,50V,X7R,TP,1005	4	SA
...4	DC25	2203-000812	C-CER,CHIP;0.033nF,5%,50V,C0G,TP,1005	4	SA
...4	AD480	2203-000995	C-CER,CHIP;0.047nF,5%,50V,C0G,TP,1005	3	SA
...4	AD480	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,TP,1005	18	SNA
...4	AD480	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	6	SNA
...4	AC2	2203-002711	C-CER,CHIP;100nF,10%,25V,X7R,TP,1608	3	SA
...4	C151	2203-003039	C-CER,CHIP;0.008nF,0.25pF,50V,C0G,TP,100	2	SNA
...4	AAC1	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	11	SNA
...4	AD480	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,0.5T	2	SNA
...4	VC37	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,1005	112	SA
...4	AD480	2203-006126	C-CER,CHIP;47nF,10%,16V,X7R,TP,1005	15	SNA
...4	JC10	2203-006324	C-CER,CHIP;2200nF,10%,10V,X5R,TP,1608	8	SA
...4	C802	2203-006348	C-CER,CHIP;1000nF,10%,25V,X5R,TP,1608,0.	4	SA
...4	C125	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	28	SC
...4	HE4	2203-006474	C-CER,CHIP;22000nF,20%,6.3V,X5R,TP,2012	13	SA
...4	HDC11	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	19	SNA
...4	AD480	2203-006824	C-CER,CHIP;4700nF,10%,10V,X5R,TP,1608,-	7	SNA
...4	C23	2203-006890	C-CER,CHIP;10000nF,20%,6.3V,X5R,TP,1608	23	SNA
...4	AD480	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,TP,1005	2	SNA
...4	AD480	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012,1	5	SNA
...4	T0052	2703-000158	INDUCTOR-SMD;1uH,10%,2012,.4Ohm,50mA,45,	3	SA
...4		2703-003343	INDUCTOR-SMD;2.2uH,20%,2520,0.104Ohm,130	1	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4	T0052	2703-003713	INDUCTOR-SMD;1.5uH,20%,7366,0.015ohm,700	2	SA
...4	T0052	2703-003790	INDUCTOR-SMD;4.7uH,20%,8080,0.025ohm,450	1	SA
...4		2703-003930	INDUCTOR-SMD;4.7uH,20%,5050,0.072Ohm,245	4	SA
...4	X202	2801-003326	CRYSTAL-SMD;24MHz,30ppm,28-ABX,20pF,50oh	1	SA
...4	X202	2801-003948	CRYSTAL-SMD;12MHz,30ppm,28-AAN,12pF,60oh	1	SA
...4	X202	2801-004775	CRYSTAL-SMD;12MHz,30ppm,16pF,30ohm,TP	1	SNA
...4	DR32	3301-000314	BEAD-SMD;120ohm,1608,TP,120ohm/100MHz	7	SNA
...4	T0568	3301-002039	BEAD-SMD;26ohm,1608,TP	35	SA
...4	F201	3601-001374	FUSE-SURFACE MOUNT;32V,5A,FAST-ACTING,PL	1	SA
...4		3701-001762	CONNECTOR-HDMI;19P,2ROW,FEMALE,SMD-A,AU	1	SA
...4		3701-001784	CONNECTOR-HDMI;19P,2ROW,FEMALE,SMD-S,AU	2	SA
...4		3707-001106	CONNECTOR-OPTICAL;STRAIGHT W/L,SPDIF	1	SA
...4		3709-001712	CONNECTOR-CARD SLOT;68P,1.27mm,ANGLE,AU,	1	SA
...4	HB01A	3711-005925	HEADER-BOARD TO CABLE;BOX,51P,1R,0.5mm,S	1	SA
...4		3711-007571	CONNECTOR-HEADER;BOX,18P,2R,2.0mm,ANGLE,	1	SA
...4	EH01	3711-007742	HEADER-BOARD TO CABLE;BOX,20P,2R,2mm,ANG	1	SA
...4	EH01	3711-007814	HEADER-BOARD TO CABLE;BOX,4P,1R,1.25mm,S	1	SA
...4	EH01	3711-008131	HEADER-BOARD TO CABLE;BOX,4P,1R,2.5mm,AN	1	SA
...4		3722-003225	JACK-USB;4P/1C,Au,BLK,SMD-A(DIP),A	2	SA
...4		3722-003226	JACK-PHONE;7P/1C,SN,BLK	3	SA
...4		3722-003229	JACK-MODULAR;8P/8C W/L,Y,STRAIGHT,N,Au,1	1	SA
...4		3722-003248	JACK-USB;4P/1C(W/L),NI/PD/AU/SN,BLK,STRA	1	SA
...4		3722-003408	JACK-SCART;21P,SN,BLK	1	SA
...4		3722-003453	JACK-PIN;J/B 5P + Screw hole,NI+SN,GRN/B	1	SA
...4	ET01	BN40-00232A	TUNER;DTOD40FVL084AA,DTOD40FVL084AA,DVB-	1	SA
...4		BN41-01812A	PCB MAIN;X10 PLUS, LED 6 Series,FR-4,4,A	1	SNA
...4		BN97-06569A	ASSY MICOM-MAIN;T-MST10PDEUC-XXXX,U78A,	1	SNA
....5		1107-002088	IC-NAND FLASH;KLM2G1HE3F-B001,2GByte,16G	1	SNA
...4		BN97-06570A	ASSY MICOM-SUB;T-MST10PDEUC-S-XXXX,U78A,	1	SNA
....5		0903-001718	IC-MICROCONTROLLER;61P805-RG480WT,LQFP,4	1	SNA
...3		BN97-06719A	ASSY DRM-KEY;X9/X10+	1	SNA
...4		BN46-00109H	KEY CODE-CERTIFI;MAC,TV/AV,General	1	SNA
...4		BN46-00110G	KEY CODE-CERTIFI;HDCP,TV,MSTAR,General	1	SNA
...4		BN46-00115H	KEY CODE-CERTIFI;CI+,TV,2012X,Euro	1	SNA
1		BN92-09854G	ASSY BOX;UE6100 46	1	SNA
.2		BH68-00662A	LABEL BOX-00;ALL MODEL,MOJO 90G,60,110,W	1	SNA
.2		BN69-07393E	BOX-02,SET;46UE6100-FS,CB,A-01,DW2,YEL,W	1	SNA
1		BN92-09857A	ASSY P/MATERIAL;UE6100 46	1	SNA
.2		6902-000379	BAG AIR;LDPE,T0.2,W1000,L1800,TRP,1260.0	1	SNA
.2	M040	6922-000003	BAND PP;PP,T0.8,W18,L1650M,TRP,DA69-9014	1	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
.2		BN68-02422B	LABEL-WARNING SHIPPING;ALL MODEL,A/P 100	1	SNA
.2		BN69-00257Y	PACKING-SHEET PALLET;PACKING SHEET PALLE	1	SNA
.2		BN69-03982L	PAD PACKING-EDGE;EDGE,PAPER,-,T5,W100,L2	1	SNA
.2		BN69-05418A	PACKING-BAG WRAPPING;-LDPE,-,0,019,500,	3	SNA
.2		BN69-06642A	PACKING-PAD;PAD,PAPER,-,-,CB-SW4,1300,10	1	SNA
.2		BN69-06680A	PACKING-BAG SHEET ROLL;-CB,-,FOAM 0,5mm	2	SNA
.2		BN69-07123A	CUSHION-SET;46UE61-65-6800-FS,EPS,16.7g/	1	SNA
.2		BN69-07609G	PALLET;UE46ES6, UE46ES7000,WOOD,-,1120,1	1	SNA
.2		BN74-00008D	TAPE-OPP MASKING;OPP,T0.05,W75,L800M,CLR	3	SNA
1	ACCE1	BN92-10342M	ASSY ACCESSORY;UE46ES6100WXXC	1	SNA
.2		BN68-04099D	LABEL-01,STICKER;UE6R,EDC,PET,T0.05,60,1	1	SNA
.2	3DGLA	BN96-22902A	ASSY ACCESSORY 3D GLASSES;SSG-4100GB,IN-	1	SA
.2	ACCE2	BN96-22994C	ASSY ACCESSORY-CABLE;UE32ES6100WXRU	1	SNA
..3	T0268	3903-000603	CBF-POWER CORD;DT,CEE,LP-21L,250V,2.5A,B	1	SA
..3	T0120	4301-000121	BATTERY-MN;1.5V,R03,10.5x44.5m,HOLDER,7.	2	SNA
..3		6902-001340	BAG PE;LDPE,T0.05,W250,L350,TRP,RECYCLE	1	SNA
..3	REMO2	AA59-00581A	REMOCON;TM1250,49,3V,Europe, E6900	1	SA
..3		BN61-05491A	HOLDER-WIRE STAND;UB7000 46inch,NYRON	1	SNA
..3	M9889	BN63-01798B	CLOTH-CLEAN;CLOTH,180,200,sea blue,ToC	1	SNA
..3	EH03A	BN96-18153A	ASSY HOLDER P-RING;11 LED-TV	1	SNA
...4		6902-001404	BAG ZIPPER;LDPE,T0.05,W80,L100,TRP	1	SNA
...4	AH365	BN61-07295A	HOLDER-RING;40UD5500,ABS,BK0007,HB	4	SNA
.2	ACCE4	BN96-23954F	ASSY ACCESSORY-MANUAL;UE40ES6100WXXC	1	SNA
..3		6902-000476	BAG PE;LDPE,T0.03,W250,L350,TRP,Recycle,	1	SNA
..3	T0527	BN68-00513A	LABEL-E,PASS;ALL MODEL,YUPO(110G),50X15,	1	SNA
..3		BN68-00514K	MANUAL FLYER-01,WARRANTY CARD;comm,Samsu	1	SNA
..3		BN68-03019A	LEAFLET-02,SAFETY GUIDE;ALL,SAMSUNG,28LE	1	SNA
..3		BN68-04093J	MANUAL USERS-01;UE6100,SAMSUNG,ENG/FRA/S	1	SNA
..3		BN68-04496B	LEAFLET-ACCESSORY GUIDE;ALL,SAMSUNG,ENG,	1	SNA
..3		BN68-04525A	LEAFLET-6100_50"65";ALL,SAMSUNG,ENG,EURO	1	SNA
..3		BN68-04581A	MANUAL FLYER-01,3D GLASSES GUIDE;SSG-410	1	SNA
..3		BN68-04662A	LEAFLET-EU REGION;ALL,SAMSUNG,"ENG/FRA/S	1	SNA
1		BN92-10882L	ASSY LABEL;UE32EH6030WXXC	1	SNA
.2	T0527	BP68-00052B	LABEL-00,RATING;FPTV,PET,T0.05,93,73	1	SNA