


1. Exploded View & Part List

Exploded View

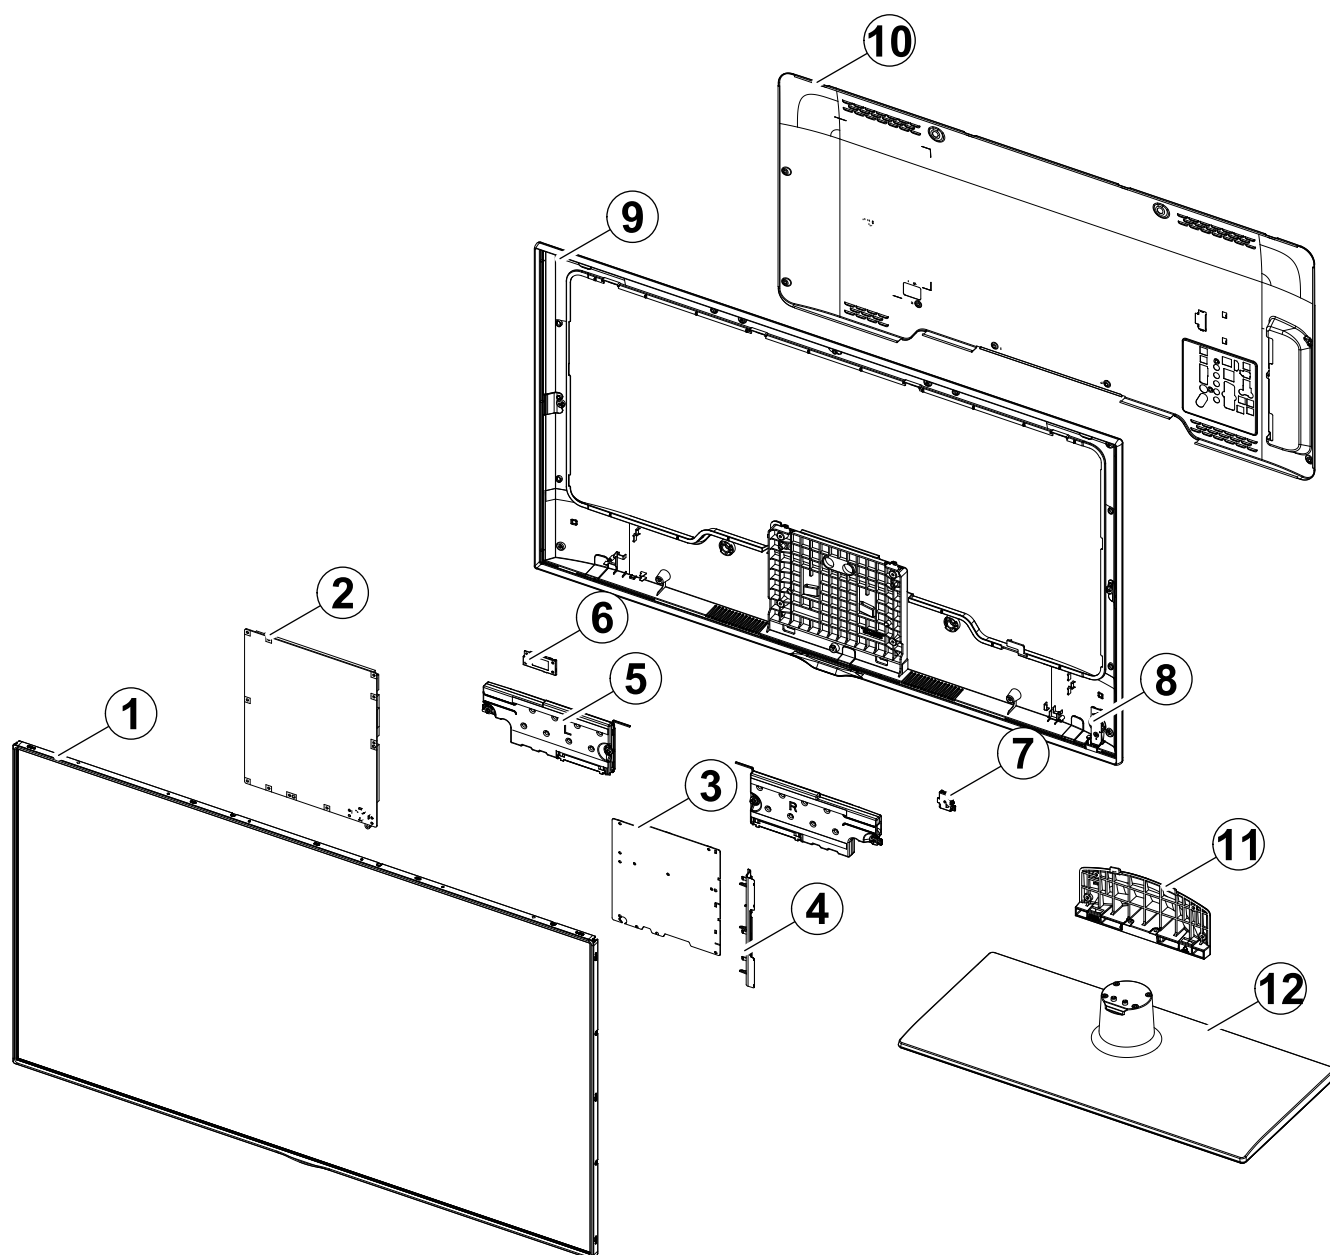

Parts List

No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
1	2	PANEL	BN07-01276A	LCD-PANEL; GF460CSA-B1,BFG7CA1,10bit,46 I	SA	1
2	2	P001A	BN44-00623B	DC VSS-LED TV PD BD; L46X1Q_DHS,L46X1Q_DH	SA	1
3	2	M0014	BN94-06555Z	ASSY PCB MAIN; UE46F67**SSXZG	SA	1
4	3		BN61-08781A	HOLDER-SIDE AV; UF6100,HIPS,BK0020,HB,W/W	SNA	1
5	2	SP01A	BN96-25565D	ASSY SPEAKER P; 6ohm,10W,Enclosure_F6K	SA	1
6	3	NW01	BN59-01161A	NETWORK; WIDT-30Q,Internal WiFi,USB,IEEE8	SA	1
7	3	BT	BN96-25376A	ASSY BOARD P-RF-MODULE; Bluetooth Module,	SA	1
8	4	FB01A	BN96-26401F	ASSY BOARD P-JOG SWITCH & IR; UE46F6400,F	SA	1
9	3	M001A	BN96-26351C	ASSY COVER P-MIDDLE; UF6500 46,COPOLY V2/	SA	1
10	2	R001A	BN96-26355A	ASSY COVER P-REAR; UF6500 46,PCM T0.4	SA	1
11	2	SG01A	BN96-25543A	ASSY GUIDE P-STAND; UF6100 40,QUAD	SA	1
12	2	SB04A	BN96-27153A	ASSY STAND P-BASE; UF6500 46~55,ALCOT,BLK	SA	1

2. Electrical Parts List

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
			UE46F6740SSXZG (AH02)		
1	R001A	BN90-03764A	ASSY COVER REAR;PE8000 51	1	SNA
.2	SCREW	6003-001782	SCREW-TAPTYPE;BH,+,B,M4,L12,ZPC(BLK),SWR	4	SA
.2	R001A	BN96-26355A	ASSY COVER P-REAR;UF6500 46,PCM T0.4	1	SA
..3		BN63-09121C	SHEET-INSULATOR SMPS;UE5.5~UE6.8,40/46/5	1	SNA
..3	R001	BN63-10435A	COVER-REAR;UF6500 46,PCM,T0.4,BKN-P824	1	SNA
..3	T0071	BN64-02263J	INLAY-TERMINAL;UF6300, 55 ,EO/CIS/SATELL	1	SNA
..3		BN68-03518A	LABEL-STICKER;WW,ALL,A/P,-,70.6,72,-,-,-	1	SNA
..3		BN68-04709W	LABEL-TERMINAL SIDE;UF6400,EO/CIS SATELL	1	SNA
1	S001A	BN90-04383L	ASSY STAND;UF6500 46	1	SNA
.2	SG01A	BN96-25543A	ASSY GUIDE P-STAND;UF6100 40,QUAD	1	SA
..3	SG03	BN61-08823A	GUIDE-STAND;UF6100 55",PC+GF,G/F 20%	1	SA
..3		BN69-08751A	WRAP VINYL-SHRINK;STAND,PLASTIC OTHERS,P	0	SNA
..3		BN96-18013E	ASSY ACCESSORY-SCREW;6003-001782,4EA,ALL	2	SNA
...4	SCREW	6003-001782	SCREW-TAPTYPE;BH,+,B,M4,L12,ZPC(BLK),SWR	8	SA
...4		BN69-08203E	PACKING-BAG-SCREW;LDPE,0.05,70,90,TRP,Vi	2	SNA
.2	SB04A	BN96-27153A	ASSY STAND P-BASE;UF6500 46~55,ALCOT,BLK	1	SA
..3		6002-001294	SCREW-TAPPING;BH,+,M4,L16,ZPC(BLK)	4	SA
..3	SCREW	6003-001782	SCREW-TAPTYPE;BH,+,B,M4,L12,ZPC(BLK),SWR	5	SA
..3		BN61-04692A	BOSS-PRIMER;#94,SHEET,clear,35cps	0	SNA
..3		BN61-05728A	BOSS-TAPE;UB7000,TAPE,T0.4,W10,DARK GRAY	3	SNA
..3		BN61-07159C	HOLDER-SWIVEL,TOP;46/50/55 QUAD STAND,AC	1	SNA
..3		BN61-07739A	BRACKET-SWIVEL,BOTTOM;UD8000 46/55 QUAD,	1	SNA
..3		BN61-07745A	BRACKET-SWIVEL,TOP;UD8000 46"/55" QUAD,S	1	SNA
..3		BN61-08737A	HOLDER-SWIVEL,BOTTOM;46-55 SLIM QUAD STA	1	SNA
...4		0103-009825	RESIN-POM;TS-25A,Dark Gray,GY0199,HB	6	SNA
..3		BN61-09384A	BRACKET-STAND BASE;UF6500 46",HGI	1	SNA
..3	SG01	BN61-09385A	GUIDE-STAND NECK;UF6500 40,PC,G/F 20%	1	SNA
...4		0103-007285	RESIN-PC;MW32020GFU,K032202GFV,BK0007,V2	125	SNA
...4		BN68-00513D	LABEL-RESIN;resin,-,art paper,-,10,25,-,	1	SNA
..3		BN63-04755W	COVER-SHEET;UF7000,PE,T0.05,W300mm,200M,	1	SNA
..3		BN63-10865A	COVER-STAND BASE;UF6500 46,ALCOT,T0.6,BI	1	SNA
..3		BN63-10866A	COVER-NECK;UF6500 40,ABS+PC	1	SNA
..3		BN67-00327D	RUBBER-FOOT;STAND,SILICON,13*13,T2,GRAY(	7	SNA
..3	T0527	BN68-00513A	LABEL-E,PASS;ALL MODEL,YUPO(110G),50X15,	1	SNA
1		BN90-04578R	ASSY W/I;UF6K	1	SNA
.2		BN81-08159Z	PART SET-ELEC W/I;UF4* ~ UF8* ELEC	1	SNA
.2		BN81-08365C	PART SET-MECH W/I;UF6S,U46FS*	1	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
1		BN90-04635F	ASSY COVER MIDDLE;UF6500 46	1	SNA
.2		6001-002755	SCREW-MACHINE;BH,+,M3,L6,ZPC(BLK),SWRCH1	15	SA
.2	M001A	BN96-29347B	ASSY COVER P-MIDDLE;UE46F65,,,,,BN96-263	1	SNA
..3	NW01	BN59-01161A	NETWORK;WIDT-30Q,Internal WiFi,USB,IEEE8	1	SA
..3	BT	BN96-25376A	ASSY BOARD P-RF-MODULE;Bluetooth Module,	1	SA
...4	AS BT	BN81-08545A	A/S-BT;Bluetooth Module SCREW	1	SNA
...4		BN97-07275A	ASSY MICOM-BLUETOOTH F/W;BN81-08385A	1	SNA
....5		BN81-08385A	AS-BLUETOOTH F/W;BLUETOOTH F/W	1	SNA
..3	M001A	BN96-26351C	ASSY COVER P-MIDDLE;UF6500 46,COPOLY V2/	1	SA
...4		0203-001598	TAPE-FILAMENT;#8915,0.15,12,55000,CLR	0	SNA
...4	SCREW	6003-000115	SCREW-TAPTYPE;BH,+,B,M3,L6,ZPC(BLK),SWRC	2	SA
...4		BN63-08608B	COVER-SHEET;Rhcm,PE Vinyl,T 0.04,80MM,20	3	SNA
...4	R002A	BN63-10249C	COVER-MIDDLE;UF6500 46,COPOLY V2/NH PC+A	1	SNA
....5		0103-007678	RESIN-PC ABS;CF210M,6209G,BK0007,V0 (1.5	913	SNA
....5		0103-009551	RESIN-COPOLYESTER;W100/TR100,TP0010,V2	332	SNA
....5		BN63-10876A	COVER-HOT-STAMPING(FOIL);UF6640, UF6900,	3	SNA
....5		BN68-00513D	LABEL-RESIN;resin,-,art paper,-,10,25,-,	1	SNA
...4		BN63-10260A	COVER-DECORATION-LOGO;UF6500-40,PC,inclu	1	SNA
...4		BN63-10886A	COVER-SHEET;rose70",PET+SILICONE,T0.052,	7	SNA
...4	T0527	BN68-00513A	LABEL-E,PASS;ALL MODEL,YUPO(110G),50X15,	1	SNA
...4		BN74-00052A	TAPE-PAPER;LB550,Crepe Paper,0.18mm, 10m	0	SNA
...4	FB01A	BN96-26401F	ASSY BOARD P-JOG SWITCH & IR;UE46F6400,F	1	SA
....5	EC13	BN39-01772C	LEAD CONNECTOR;UE46F6400,Cable Connector	1	SNA
....5	5WAY	BN96-26401A	ASSY BOARD P-JOG SWITCH & IR;UE32F5000,F	1	SNA
1		BN91-10261A	ASSY SHIELD;6500,46,EUROPE	1	SNA
.2		6001-003016	SCREW-MACHINE;PWH,+,M3.0,L5.0,ZPC(WHT),S	9	SA
.2	EC13	BN39-01475C	LEAD CONNECTOR;UN46C6500,Falt Connector,	1	SA
.2	EC14	BN39-01744A	LEAD CONNECTOR-LED WIRE HARNESS;DIRECT w	1	SA
.2	P001A	BN44-00623B	DC VSS-LED TV PD BD;L46X1Q_DHS,L46X1Q_DH	1	SA
.2	FL06	BN96-24278W	ASSY CABLE P-FFC;UE46F6500,FFC,332mm,51P	1	SA
.2	SP01A	BN96-25565D	ASSY SPEAKER P;6ohm,10W,Enclosure_F6K	1	SA
1		BN91-11066A	ASSY LCD-AUO;BN07-01276A	1	SNA
.2	PANEL	BN07-01276A	LCD-PANEL;GF460CSA-B1,BFG7CA1,10bit,46 I	1	SA
..3		BN96-25505A	ASSY T CON P;GF460CSA-B1,10bit,46 inch,F	1	SNA
1	M0017	BN91-11117Z	ASSY CHASSIS;UE46F67**SSXZG	1	SNA
.2	M0014	BN94-06555Z	ASSY PCB MAIN;UE46F67**SSXZG	1	SA
..3		BN61-08781A	HOLDER-SIDE AV;UF6100,HIPS,BK0020,HB,W/W	1	SNA
...4		0103-004628	RESIN-HIPS;HF-1690H,K2901,BK0020,1.5mm H	13	SNA
..3		BN62-00365B	HEAT SINK-PS;F 4k,5k,6k,A1050,ANODIZING,	1	SNA
..3		BN62-00367A	PAD GAP;F6400,SILICON,35 35 mm,6.5,Light	1	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
..3		BN67-00364C	RUBBER-FOOT;X13,RUBBER,10*10,6,Dark Gray	1	SNA
..3		BN97-07073F	ASSY SMD;F6500,EUROPE	1	SNA
...4		0202-001899	SOLDER-CREAM;M705-GRN360-K2-VT,25-36um,S	5	SNA
...4	DS01A	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	2	SA
...4		0403-001783	DIODE-ZENER;BZB84-C6V2,5.8/6.6V,300mW,SO	4	SNA
...4		0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	3	SA
...4		0404-001787	DIODE-SCHOTTKY;SS3P4,40V,3000mA,DO-220AA	3	SA
...4		0406-001200	DIODE-TVS;RCLAMP0504F,6/-V,150W,SC-70	4	SA
...4		0406-001271	DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251	1	SNA
...4		0406-001290	DIODE-TVS;3.0SMCJ20A,22.2/-/24.5V,3000W,	1	SNA
...4		0501-000279	TR-SMALL SIGNAL;KSA1182-Y,PNP,150mW,SOT-	2	SA
...4		0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	10	SC
...4		0505-000110	FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0.	10	SA
...4		0505-002560	FET-SILICON;AO6415,P,-20V,-3.3A,0.15ohm,	1	SA
...4		0505-002598	FET-SILICON;AP2317GN,P,-20V,-4.2A,0.052o	1	SA
...4		0801-002701	IC-CMOS LOGIC;74VHCT125A,BUFFER,TSSOP,14	1	SA
...4		0801-002780	IC-CMOS LOGIC;74LVC1G17,SCHMITT-TRIGGER	1	SA
...4		0801-003330	IC-CMOS LOGIC;Octal buffer,DQFN,20P,4.5x	2	SA
...4		0904-002803	IC-USC;AU6258S-JKF,QFN,28Z30,5.0mm X 5.0	1	SNA
...4		1001-001545	IC-ANALOG MULTIPLEX;TS3USB221ERSER,R-PQF	1	SA
...4		1103-001487	IC-EEPROM;AT24C256C-SSHL-T,256Kbit,32Kx8	1	SA
...4		1105-002338	IC-DDR3 SDRAM;K4B4G1646B-HCMA,DDR3 1866,	1	SA
...4		1105-002430	IC-DDR3 SDRAM;K4B2G1646E-BCMA,DDR3 1866,	2	SA
...4		1201-003183	IC-AUDIO AMP;DRV612,HTSSOP,14P,5x4.4mm,D	1	SA
...4		1201-003526	IC-AUDIO AMP;TAS5745,QFP,48Z30,7x7mm,DUA	1	SNA
...4		1203-004364	IC-VOL. DETECTOR;RT9818C-42PV,SOT-23,3P,	1	SA
...4		1203-006109	IC-POSIFIXED REG.;S-1206B33-M3T1G,SOT-2	2	SA
...4		1203-006130	IC-POSIFIXED REG.;S-1172B25-U5T1G,SOT-8	1	SA
...4		1203-006135	IC-POSIFIXED REG.;AP1117D-33-GZ-13-89,T	1	SA
...4		1203-006136	IC-POSIFIXED REG.;AP1117D-18-GZ-13-89,T	1	SA
...4		1203-006138	IC-POSIAJUST REG.;AP1117DGZ-13-89,TO-2	1	SA
...4		1203-007211	IC-POSIFIXED REG.;G9915-12T45U,TO-252,3	1	SA
...4		1203-007238	IC-PWM CONTROLLER;TPS54427,DDA,8P,4.8x3.	1	SNA
...4		1203-007242	IC-POSIAJUST REG.;G2992BP11U,SOP-8,8P,	1	SA
...4		1203-007502	IC-DC/DC CONVERTER;AOZ3011PI,SO-8,8Z30,4	1	SA
...4		1203-007667	IC-DC/DC CONVERTER;A8303SESTR-T,QFN,20Z3	1	SNA
...4		1203-007695	IC-DC/DC CONVERTER;AOZ3018,SO-8,8Z30,4.9	1	SNA
...4		1203-007728	IC-VOL. DETECTOR;RT9831GQW,QW : WQFN-20L	1	SA
...4		1204-003421	IC-DECODER;SEMS30,PBGA,729Z30,21.6x21.6m	1	SA
...4		1205-004447	IC-SWITCH;TPS2051CDBVR,SOT23-5,5P,3x1.65	4	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		1205-004691	IC-SWITCH;BD82022FVJ,MSOP-8L JEDEC,8Z30,	1	SNA
...4		1405-001271	VARISTOR;35V,20Vdc,5A,1.0x0.5x0.6mm,TP,1	28	SA
...4		2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	13	SNA
...4		2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	12	SA
...4		2007-000142	R-CHIP;2.7Kohm,5%,1/16W,TP,1005	1	SNA
...4		2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	52	SNA
...4		2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	42	SA
...4		2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	6	SNA
...4		2007-000155	R-CHIP;27Kohm,5%,1/16W,TP,1005	1	SNA
...4		2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	16	SNA
...4		2007-000170	R-CHIP;1Mohm,5%,1/16W,TP,1005	3	SNA
...4		2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	13	SNA
...4		2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	5	SNA
...4		2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	13	SNA
...4		2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	2	SNA
...4		2007-000256	R-CHIP;1.6Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-000336	R-CHIP;120Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-000583	R-CHIP;22Kohm,1%,1/10W,TP,1608	2	SA
...4		2007-000695	R-CHIP;3.3ohm,5%,1/10W,TP,1608	2	SNA
...4		2007-000775	R-CHIP;33Kohm,5%,1/16W,TP,1005	1	SNA
...4		2007-000803	R-CHIP;36Kohm,1%,1/10W,TP,1608	2	SA
...4		2007-000857	R-CHIP;4.3Kohm,1%,1/10W,TP,1608	5	SNA
...4		2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	3	SNA
...4		2007-000979	R-CHIP;5.6Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-001116	R-CHIP;680ohm,1%,1/10W,TP,1608	1	SA
...4		2007-001125	R-CHIP;68Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-001168	R-CHIP;75ohm,5%,1/4W,TP,3216	1	SA
...4		2007-001288	R-CHIP;18ohm,5%,1/16W,TP,1005	4	SA
...4		2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	15	SNA
...4		2007-001298	R-CHIP;51ohm,5%,1/16W,TP,1005	2	SNA
...4		2007-001301	R-CHIP;68ohm,5%,1/16W,TP,1005	7	SA
...4		2007-002970	R-CHIP;56ohm,5%,1/16W,TP,1005	4	SA
...4		2007-003015	R-CHIP;2.2ohm,5%,1/16W,TP,1005	1	SNA
...4		2007-003022	R-CHIP;62ohm,5%,1/16W,TP,1005	26	SNA
...4		2007-007001	R-CHIP;3.9Kohm,5%,1/16W,TP,1005	1	SA
...4		2007-007095	R-CHIP;390ohm,5%,1/16W,TP,1005	1	SA
...4		2007-007107	R-CHIP;100Kohm,1%,1/16W,TP,1005	8	SNA
...4		2007-007135	R-CHIP;18Kohm,1%,1/16W,TP,1005	4	SNA
...4		2007-007138	R-CHIP;27Kohm,1%,1/16W,TP,1005	1	SNA
...4		2007-007139	R-CHIP;47Kohm,1%,1/16W,TP,1005	1	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	2	SNA
...4		2007-007156	R-CHIP;1ohm,5%,1/16W,TP,1005	13	SNA
...4		2007-007238	R-CHIP;8.25Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-007316	R-CHIP;3.3Kohm,1%,1/16W,TP,1005	3	SNA
...4		2007-007318	R-CHIP;1Kohm,1%,1/16W,TP,1005	33	SNA
...4		2007-007331	R-CHIP;90.9Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-007463	R-CHIP;1.1Kohm,1%,1/16W,TP,1005	1	SA
...4		2007-007470	R-CHIP;7.5Kohm,1%,1/16W,TP,1005	1	SNA
...4		2007-007517	R-CHIP;240ohm,1%,1/16W,TP,1005	4	SNA
...4		2007-007538	R-CHIP;56Kohm,1%,1/16W,TP,1005	1	SA
...4		2007-007766	R-CHIP;2Kohm,1%,1/16W,TP,1005	5	SNA
...4		2007-007942	R-CHIP;1Mohm,1%,1/16W,TP,1005	1	SNA
...4		2007-007981	R-CHIP;180Kohm,1%,1/16W,TP,1005	1	SNA
...4		2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	11	SNA
...4		2007-008133	R-CHIP;56.2Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-008137	R-CHIP;24Kohm,1%,1/16W,TP,1005	2	SNA
...4		2007-008275	R-CHIP;30Kohm,1%,1/16W,TP,1005	1	SNA
...4		2007-008298	R-CHIP;49.9ohm,1%,1/16W,TP,1005	4	SA
...4		2007-008426	R-CHIP;12.4Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-008649	R-CHIP;220ohm,1%,1/16W,TP,1005	1	SNA
...4		2007-008807	R-CHIP;53.6Kohm,1%,1/16W,TP,1005	1	SA
...4		2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	2	SA
...4		2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	3	SA
...4		2011-001344	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,2	4	SA
...4		2011-001449	R-NETWORK;22ohm,5%,1/16W,L,4P,TP,1010	6	SA
...4		2011-001506	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,4P,TP,1	6	SNA
...4		2011-001527	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,4P,TP,	5	SNA
...4		2011-001587	R-NETWORK;100ohm,5%,1/16W,L,CHIP-V,4P,TP	6	SNA
...4	AD480	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,TP,1005	6	SA
...4	AD480	2203-000386	C-CER,CHIP;0.015nF,5%,50V,C0G,TP,1005	3	SA
...4	AD480	2203-000425	C-CER,CHIP;0.018nF,5%,50V,C0G,TP,1005	3	SA
...4	AD480	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,TP,1005	10	SA
...4	AD480	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,TP,1005	8	SA
...4	AD480	2203-000530	C-CER,CHIP;2.7nF,10%,50V,X7R,TP,1005,-	1	SNA
...4	AD480	2203-000575	C-CER,CHIP;220nF,10%,25V,X7R,TP,2012	6	SNA
...4	AD480	2203-000679	C-CER,CHIP;0.027nF,5%,50V,C0G,TP,1005	2	SA
...4	AD480	2203-000812	C-CER,CHIP;0.033nF,5%,50V,C0G,TP,1005	5	SA
...4	AD480	2203-000995	C-CER,CHIP;0.047nF,5%,50V,C0G,TP,1005	3	SA
...4	AD480	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,TP,1005	23	SNA
...4	AD480	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	4	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4	AD480	2203-002711	C-CER,CHIP;100nF,10%,25V,X7R,TP,1608	3	SA
...4	AD480	2203-003039	C-CER,CHIP;0.008nF,0.25pF,50V,C0G,TP,100	2	SNA
...4	AD480	2203-005083	C-CER,CHIP;220nF,10%,50V,X7R,TP,1608,0.8	2	SA
...4	AD480	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	5	SNA
...4	AD480	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,0.5T	2	SNA
...4	AD480	2203-005642	C-CER,CHIP;0.22nF,5%,50V,NP0,TP,1005	2	SNA
...4	AD480	2203-005968	C-CER,CHIP;4.7nF,10%,50V,X7R,TP,1005,0.5	2	SNA
...4	AD480	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,1005	121	SA
...4	AD480	2203-006126	C-CER,CHIP;47nF,10%,16V,X7R,TP,1005	17	SNA
...4	AD480	2203-006324	C-CER,CHIP;2200nF,10%,10V,X5R,TP,1608	6	SA
...4	AD480	2203-006348	C-CER,CHIP;1000nF,10%,25V,X5R,TP,1608,0.	4	SA
...4	AD480	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	25	SC
...4	AD480	2203-006474	C-CER,CHIP;22000nF,20%,6.3V,X5R,TP,2012	26	SA
...4	AD480	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	19	SNA
...4	AD480	2203-006824	C-CER,CHIP;4700nF,10%,10V,X5R,TP,1608,-	10	SNA
...4	AD480	2203-006890	C-CER,CHIP;10000nF,20%,6.3V,X5R,TP,1608	23	SNA
...4	AD480	2203-006960	C-CER,CHIP;1000nF,10%,50V,X7R,TP,2012	1	SNA
...4	AD480	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,TP,1005	2	SNA
...4	AD480	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012,1	8	SNA
...4	AD480	2203-007513	C-CER,CHIP;10000nF,10%,10V,X5R,TP,1608,0	4	SA
...4	AD480	2203-007544	C-CER,CHIP;100nF,10%,50V,X7R,TP,1005	4	SA
...4		2402-001403	C-AL,SMD;100uF,20%,35V,TP,10.3X10.3	1	SNA
...4		2703-000158	INDUCTOR-SMD;1uH,10%,2012,.40ohm,50mA,45,	4	SA
...4		2703-000408	INDUCTOR-SMD;3.3uH,20%,3225,.28ohm,500mA	1	SA
...4		2703-001229	INDUCTOR-SMD;2.2uH,10%,1608,1.150hm,15mA	1	SC
...4		2703-001938	INDUCTOR-SMD;56nH,5%,1005,1.50hm,200mA,1	1	SA
...4		2703-003713	INDUCTOR-SMD;1.5uH,20%,7366,0.015ohm,700	2	SA
...4		2703-003790	INDUCTOR-SMD;4.7uH,20%,8080,0.025ohm,450	1	SA
...4		2703-003930	INDUCTOR-SMD;4.7uH,20%,5050,0.0720hm,245	4	SA
...4		2703-004562	INDUCTOR-SMD;15uH,20%,10.3x10.2 mm,4.5T,	1	SNA
...4		2801-000102	CRYSTAL-SMD;12MHz,30ppm,12pF,100ohm,TP	1	SA
...4		2801-003326	CRYSTAL-SMD;24MHz,30ppm,28-ABX,20pF,50oh	1	SA
...4		2801-003856	CRYSTAL-SMD;0.032768MHz,20ppm,28-ACP,7pF	1	SNA
...4		2801-004775	CRYSTAL-SMD;12MHz,30ppm,16pF,30ohm,TP	1	SNA
...4		3301-000314	BEAD-SMD;120ohm,1608,TP,120ohm/100MHz	8	SNA
...4		3301-002039	BEAD-SMD;26ohm,1608,TP	30	SA
...4		3601-001374	FUSE-SURFACE MOUNT;32V,5A,FAST-ACTING,PL	1	SA
...4		3701-001856	CONNECTOR-HDMI;19P,2ROW,FEMALE,SMD-S,AU	1	SA
...4		3701-001861	CONNECTOR-HDMI;19P,2ROW,FEMALE,SMD-A,AU	3	SA
...4		3707-001106	CONNECTOR-OPTICAL;STRAIGHT W/L,SPDIF	1	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		3708-003073	CONNECTOR-FPC/FFC/PIC;51P,0.5mm,SMD,AU,N	1	SNA
...4		3710-003374	CONNECTOR-SOCKET;64P,2R,0.5mm,ANGLE,NI+S	1	SA
...4	EH01	3711-007742	HEADER-BOARD TO CABLE;BOX,20P,2R,2mm,ANG	1	SA
...4	EH01	3711-008131	HEADER-BOARD TO CABLE;BOX,4P,1R,2.5mm,AN	1	SA
...4	EH01	3711-008558	HEADER-BOARD TO CABLE;BOX,26P,2R,1.25mm,	1	SA
...4		3722-003229	JACK-MODULAR;8P/8C W/L,Y,STRAIGHT,N,Au,1	1	SA
...4		3722-003457	JACK-USB;4P/1C,NI,BLK,A	3	SA
...4		3722-003546	JACK-PIN;5P+Screw hole,NI+SN,G,Y/BLU/RED	1	SA
...4		3722-003617	JACK-PHONE;14P/2C,SN,BLK,STRAIGHT,3.6PI,	1	SA
...4		3722-003655	JACK-SCART;21P,SN,BLK	1	SA
...4	ET01	BN40-00264A	TUNER;DNSS243IH105A,DNSS243IH105A,DVB-TC	1	SA
...4		BN41-01958A	PCB MAIN;X12, LED 6 Series,FR-4,4,A,1.2T	1	SNA
...4		BN97-07121A	ASSY MICOM;X12-PM51-0011-130709,2013.07.	1	SNA
....5		1107-002226	IC-NOR FLASH;W25Q40CLSSIP,4Mbit,SOIC,8P,	1	SNA
...4		BN97-07122A	ASSY MICOM;T-MST12DEUC-XXXX,U85A,2012.11	1	SNA
....5		1107-002077	IC-NAND FLASH;KLM4G1FE3B-B001,4Gbyte,32G	1	SA
...4		BN97-07123A	ASSY MICOM;T-MST12DEUS-1009,2013.06.19	1	SNA
....5		0903-001863	IC-MICROCONTROLLER;WT61P807-RG48,LQFP,48	1	SNA
...4		BN97-07278A	ASSY MICOM-BLASTER;Blaster-Version:3.03,	1	SNA
....5		BN13-00063A	PLD;MAXQ610J,QFN,44	1	SNA
..3		BN97-07143A	ASSY DRM-KEY;CI(BN46-00115J),HDCP(BN46-0	1	SNA
...4		BN46-00109H	KEY CODE-CERTIFI;MAC,TV/AV,General	1	SNA
...4		BN46-00110N	KEY CODE-CERTIFI;MIRACAST,TV,X12 /X13	1	SNA
...4		BN46-00115J	KEY CODE-CERTIFI;CI+,TV,2013X,Euro	1	SNA
1		BN92-12192D	ASSY P/MATERIAL;UF6500 46	1	SNA
.2		6902-000379	BAG AIR;LDPE,T0.2,W1000,L1800,TRP,1260.0	1	SNA
.2		6922-000003	BAND PP;PP,T0.8,W18,L1650M,TRP,DA69-9014	1	SNA
.2		BN68-02422B	LABEL-WARNING SHIPPING;ALL MODEL,A/P 100	1	SNA
.2		BN69-00257Y	PACKING-SHEET PALLET;PACKING SHEET PALLE	1	SNA
.2		BN69-03982L	PAD PACKING-EDGE;EDGE,PAPER,-,T5,W100,L2	1	SNA
.2		BN69-06640B	PACKING-PAD;PAD,PAPER,-,-,CB-SW4,910,129	1	SNA
.2		BN69-06680A	PACKING-BAG SHEET ROLL;-,-,CB,-,FOAM 0,5mm	3	SNA
.2		BN69-08095L	PALLET;F5 46",WOOD,20mm,920,1305,140,140	1	SNA
.2		BN69-08268A	CUSHION-FRONT;UF6100, 50,EPS	1	SNA
.2		BN69-08958A	CUSHION-SET;46UF6740-SS,EPS,g/1,SQUARE S	1	SNA
..3		0103-005099	RESIN-EPS;BASF303,Natural,Natural	686	SNA
.2		BN74-00008D	TAPE-OPP MASKING;OPP,T0.05,W75,L800M,CLR	3	SNA
1	ACCE1	BN92-12331J	ASSY ACCESSORY;UF6S,F67**	1	SNA
.2		BN68-04916K	LABEL-01,STICKER;UF6S,EDC,PET,T0.1,60,12	1	SNA
.2		BN96-25429V	ASSY ACCESSORY MANUAL/CABLE;UE46F67**SSX	1	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...3		3709-001791	CONNECTOR-CARD SLOT;64P,0.5mm,SMD-A,AU,P	1	SA
...3	T0268	3903-000849	CBF-POWER CORD;DT,CEE,LP-21L,250V,2.5A,B	1	SA
...3		4301-000103	BATTERY-ALKALINE;1.5V,750mAh,LR03,10.2x4	4	SNA
...3	REMO3	AA59-00759A	REMOCON-SMART TOUCH CONTROL;TM1390,14,80	1	SA
...3	REMO2	AA59-00786A	REMOCON;TM1240,45,3.0V,F6800, F6700, EU	1	SA
...3		BN61-08370A	HOLDER-WIRE STAND;26UE4000 GIUDE STAND,N	1	SA
...3	M9889	BN63-01798B	CLOTH-CLEAN;CLOTH,sea blue,ToC	1	SNA
...3		BN68-00514K	MANUAL FLYER-03,WARRANTY CARD;comm,Samsu	1	SNA
...3		BN68-04735A	LABEL-E,PASS;ALL MODEL,ART PAPER 90G,50,	1	SNA
...3		BN68-04779B	MANUAL USERS-04;UF6470,SAMSUNG,ENG/DEU/F	1	SNA
...3		BN68-04972A	MANUAL FLYER-02,REGULATORY GUI;ALL,SAMSU	1	SNA
...3		BN68-05115G	LEAFLET-05,FICHE;UF6500,EUROPE,W/P 80G,I	1	SNA
...3		BN69-08226B	BOX-01,ACCESSORY;Y13 TV,PAPER,CCP 400g,N	1	SNA
...3		BN69-08472A	PAD-02,TYPE;ACCESSORY,CB,Black Paper 400	1	SNA
...3		BN69-08751D	WRAP VINYL-SHRINK;ACCESSORY BOX,PLASTIC	0	SNA
...3	EH03A	BN96-18153B	ASSY HOLDER P-RING;UF5000 SERIES	1	SNA
...4		6902-001404	BAG ZIPPER;LDPE,T0.05,W80,L100,TRP	1	SNA
...4	AH365	BN61-07295A	HOLDER-RING;40UD5500,ABS,BK0007,HB	2	SNA
...3	FL06	BN96-26652B	ASSY CABLE P;IR BLASTER,IR BLASTER CABL,	1	SA
.2	3DGLA	BN96-25614A	ASSY ACCESSORY 3D GLASSES;SSG-5100GB,In	1	SC
1		BN92-12388M	ASSY BOX;UF6500, 46	1	SNA
.2		BH68-00662A	LABEL BOX-01;ALL MODEL,ART PAPER,60,110,	1	SNA
.2		BN69-09005H	BOX-01,SET;46UF6740-SS,CB,A-01,DW2,YEL,W	1	SNA
1		BN92-13312G	ASSY LABEL;F6***	1	SNA
.2		BN02-00102B	TAPE FILAMENT;UE7000,#893,0.15,25,50,WHI	0	SNA
.2		BN68-04913E	LABEL-LED HIGHLIGHT STICKER;F8500,8000,7	1	SNA
.2		BN68-05118K	LEAFLET-02,QSG;UF6780 6770 6670 6740,EU	1	SNA
.2	T0527	BP68-00052B	LABEL-00,RATING;FPTV,PET,T0.05,93,73	1	SNA