


# 1. Exploded View & Part List

## Exploded View

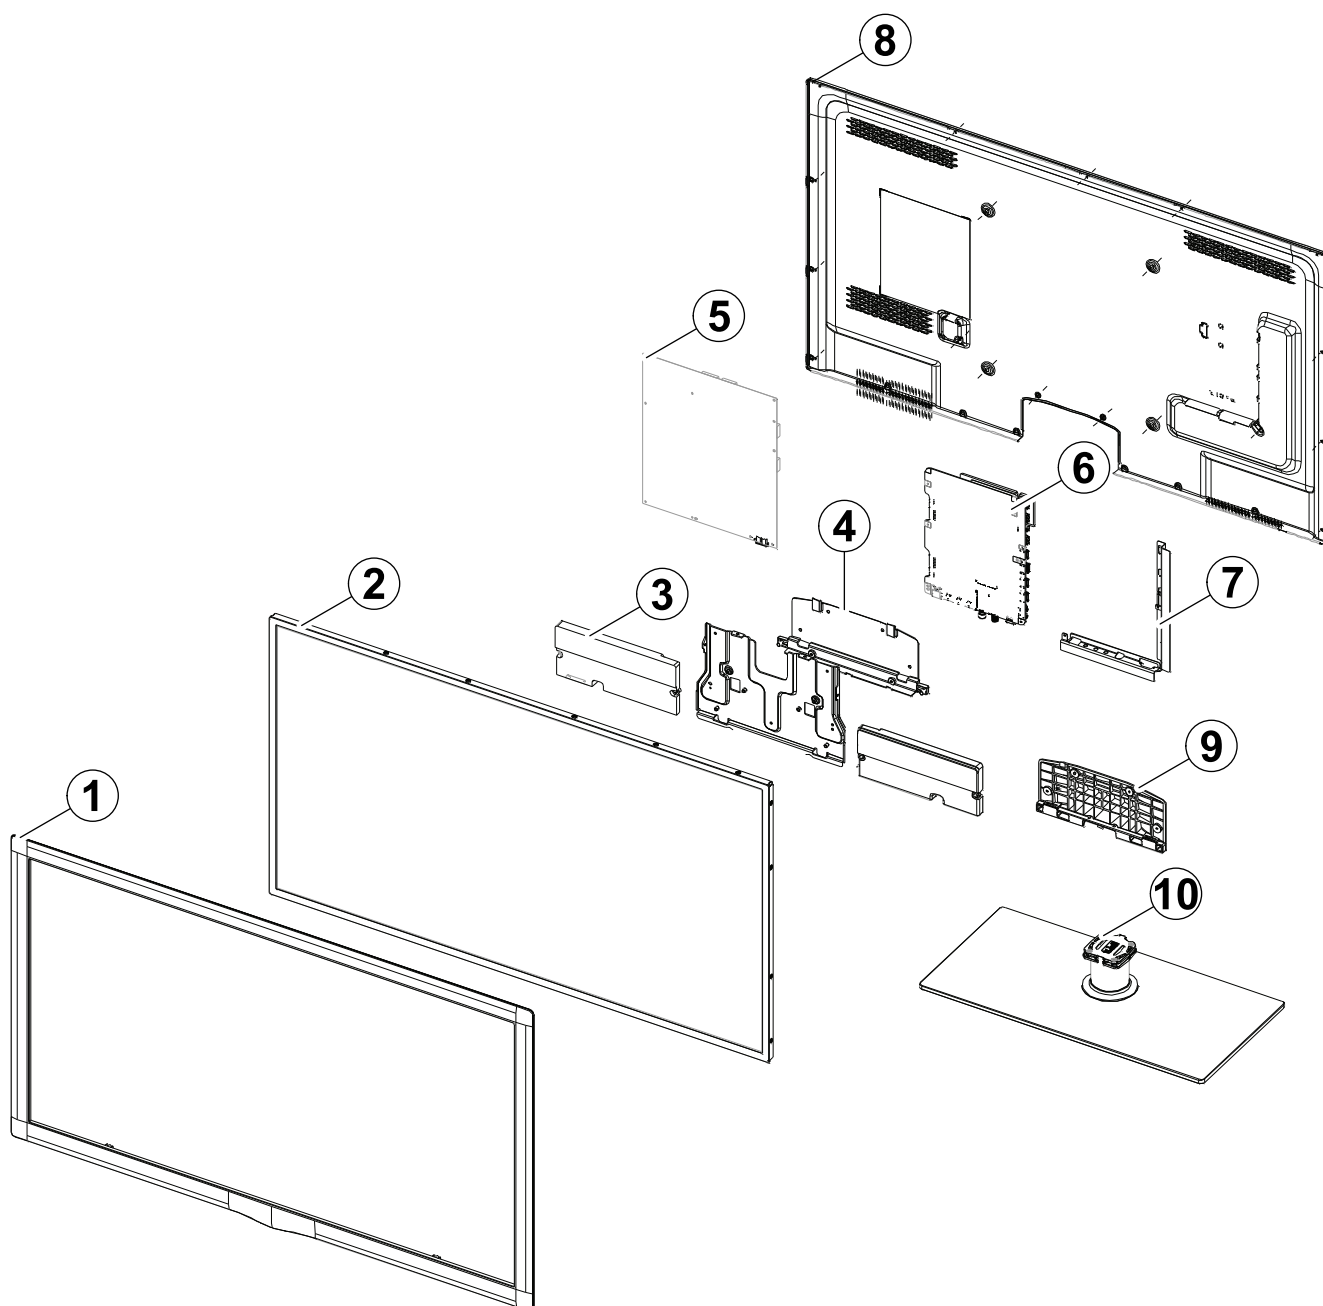

**Parts List**

| No. | Parent      | Lvl. | Loc.  | Material Code | Description & Specification                  | SNA | Qty. |
|-----|-------------|------|-------|---------------|----------------------------------------------|-----|------|
| 1   | BN90-03136B | 2    | F001A | BN96-16852B   | ASSY COVER P-FRONT;<br>UD6050,55,EO,PC+PC,V2 | SA  | 1    |
| 2   | BN91-07354A | 2    | PANEL | BN95-00466A   | PRODUCT LCD; 6K 55<br>3D_LTJ550HW03-V        | SA  | 1    |
| 3   | BN91-06862A | 2    | SP01A | BN96-18088A   | ASSY SPEAKER P;<br>6ohm,4pin,15W,Enclosure t | SA  | 1    |
| 4   | BN91-06862A | 2    | RB01  | BN63-07807C   | COVER-BOTTOM; UD5000 37,NH<br>HIPS,V1,BK0020 | SNA | 1    |
| 5   | BN91-07354A | 2    | P001A | BN44-00457A   | DC VSS-LED TV PD BD;<br>PD55A1D_BHS,PD55A1D_ | SA  | 1    |
| 6   | BN91-06866E | 2    | M0014 | BN94-04627N   | ASSY PCB MAIN; UE55D6200TSXXN                | SA  | 1    |
| 7   | BN94-04627N | 3    | CB01  | BN61-07083H   | BRACKET-AV;<br>UD6400,PCM,T0.45,BKN-P824,EUR | SNA | 1    |
| 8   | BN90-03127J | 2    | R001A | BN96-16843J   | ASSY COVER P-REAR;<br>UD6000,55,EO(SATELLITE | SA  | 1    |
| 9   | BN90-03131B | 2    | SG03A | BN96-16722A   | ASSY STAND P-GUIDE;<br>UD5000-6000,W/W,PC,G/ | SA  | 1    |
| 10  | BN90-03131B | 2    | SB04A | BN96-16847B   | ASSY STAND P-BASE;<br>UD6000,55,TEMPERED GLA | SA  | 1    |

## 2. Electrical Parts List

| Level | Loc.  | Part Code   | Description & Specification               | Qty. | SA/SNA |
|-------|-------|-------------|-------------------------------------------|------|--------|
|       |       |             | <b>UE55D6200TSXZF (H301)</b>              |      |        |
| 1     | R001A | BN90-03127J | ASSY COVER REAR;UD6000,55,EO(SATELLITE)   | 1    | SNA    |
| .2    |       | 6001-002671 | SCREW-MACHINE;BH,+,M3,L6,ZPC(BLK),SWRCH1  | 5    | SA     |
| .2    | R001A | BN96-16843J | ASSY COVER P-REAR;UD6000,55,EO(SATELLITE) | 1    | SA     |
| ..3   |       | BN60-00162Y | SPACER-FOAM;FOAM,50000mm,Dark Gray,0.35T  | 1    | SNA    |
| ..3   | R001  | BN63-07752B | COVER-REAR;UD6100 55,PCM,T0.45,BKN-P824   | 1    | SNA    |
| ..3   |       | BN63-08088A | SHEET-INSULATOR;UD6050 55,PC SHEET,T0.43  | 1    | SNA    |
| ..3   |       | BN68-03297Q | LABEL-TERMINAL BOTTOM;UD6200~6700,Europe  | 1    | SNA    |
| ..3   |       | BN68-03298N | LABEL-TERMINAL SIDE;UD6000~6100,Europe,D  | 1    | SNA    |
| ..3   |       | BN68-03518A | LABEL-STICKER;WW,ALL,60.5,68.8,LABEL-CI   | 1    | SNA    |
| ..3   | T0067 | BP60-00067E | SPACER-SCREEN;L6,50,10,BLK,T4.0,DLP       | 4    | SNA    |
| 1     | S001A | BN90-03131B | ASSY STAND;UD6000,55,DARK BROWN,W/W       | 1    | SNA    |
| .2    | SG03A | BN96-16722A | ASSY STAND P-GUIDE;UD5000-6000,W/W,PC,G/  | 1    | SA     |
| ..3   | T0524 | 6902-001063 | BAG PE;LDPE,T0.05,W180,L350,TRP,RECYCLE   | 1    | SNA    |
| ..3   | SG03  | BN61-07057A | GUIDE-STAND;UD5000 37,PC+G/F 20%,V2,BK00  | 1    | SNA    |
| ..3   |       | BN68-03388C | MANUAL FLYER-03,STAND GUIDE;U5000(32~55)  | 1    | SNA    |
| ..3   |       | BN96-18013E | ASSY ACCESSORY-SCREW;6003-001782,4EA,ALL  | 1    | SNA    |
| ...4  | SCREW | 6003-001782 | SCREW-TAPTYPE;BH,+,B,M4,L12,ZPC(BLK),SWR  | 4    | SA     |
| ...4  |       | BN69-05418B | PACKING-BAG SCREW;BN96-18013E,-,GREEN,T0  | 1    | SNA    |
| ..3   |       | BN96-18013F | ASSY ACCESSORY-SCREW;6001-002621,4EA,ALL  | 1    | SNA    |
| ...4  |       | 6001-002621 | SCREW-MACHINE;BH,+,M4,L8,ZPC(BLK),SWRCH1  | 4    | SA     |
| ...4  |       | BN69-05418C | PACKING-BAG SCREW;BN96-18013F,-,RED,T0,0  | 1    | SNA    |
| .2    | SB04A | BN96-16847B | ASSY STAND P-BASE;UD6000,55,TEMPERED GLA  | 1    | SA     |
| ..3   | SCREW | 6003-001374 | SCREW-TAPTYPE;FH,+,B,M4,L12,NI PLT,SWRCH  | 5    | SA     |
| ..3   | SCREW | 6003-001782 | SCREW-TAPTYPE;BH,+,B,M4,L12,ZPC(BLK),SWR  | 2    | SA     |
| ..3   |       | BN61-04692A | BOSS-PRIMER;#94,clear,35cps               | 0    | SNA    |
| ..3   |       | BN61-04731D | BOSS-TAPE;AMBER,ACRYL,T1.1,W20.0mm,WHITE  | 0    | SNA    |
| ..3   |       | BN61-05826A | BOSS-BOND;#760,Poly urethane,Black        | 2    | SNA    |
| ..3   | SG01  | BN61-06998A | GUIDE-STAND NECK;LD550,46,PETG,V2,TP0003  | 1    | SNA    |
| ...4  |       | 0103-007257 | RESIN-PETG;ECOZEN-SE,NP01,TP0003,3.2 V2,  | 125  | SNA    |
| ...4  |       | BN61-06079B | GUIDE-NECK-INSERT;LC650,40,PETG HB,TP000  | 1    | SNA    |
| ..3   |       | BN61-07119A | HOLDER-NECK FRONT;LD550,46,PC+G/F 20%,BK  | 1    | SNA    |
| ..3   |       | BN61-07122A | HOLDER-NECK REAR;LD550,46,PC+G/F 20%,BK0  | 1    | SNA    |
| ...4  |       | 0103-007285 | RESIN-PC;MW32020GFU,BK0007,2.0 V2,PC/GF2  | 20   | SNA    |
| ..3   |       | BN61-07244A | HOLDER-SWIVEL RING;LD550,40,POM,60pie,NC  | 1    | SNA    |
| ..3   |       | BN61-07353A | BRACKET-STAND BOTTOM;PD550 51",SECC,T3.0  | 1    | SNA    |
| ..3   | CCM1  | BN63-04755A | COVER-SHEET;AMBER,PE,T0.05,W150mm,200M,6  | 1    | SNA    |
| ..3   | FD01  | BN63-07892B | COVER-DECORATION;UD5500,37/40/46,ABS+PMM  | 1    | SNA    |

| Level | Loc.  | Part Code   | Description & Specification                | Qty. | SA/SNA |
|-------|-------|-------------|--------------------------------------------|------|--------|
| ...4  |       | 0103-007441 | RESIN-PMMA;SF-0950/B2106,BR0022,1.2T HB,   | 15   | SNA    |
| ...3  |       | BN63-08124B | COVER-STAND GLASS;UD6000,55,Glass,8.0,30   | 1    | SNA    |
| ...3  | T0527 | BN68-01648B | LABEL WARNING;WW,PET,T0.05,40,25,EXPORT    | 1    | SNA    |
| ...3  | AR011 | BN73-00079A | RUBBER FOOT;MD230,CR Rubber Black,T3.0,5   | 4    | SNA    |
| ...3  |       | BN73-00300A | RUBBER-FOOT;LC650 40,RUBBER,27*27,BLACK    | 4    | SNA    |
| ...3  |       | BN74-00031A | GREASE;kanto-kasei FL-955,grease,wht       | 0    | SNA    |
| 1     |       | BN90-03136B | ASSY COVER FRONT;UD6050,55,EO              | 1    | SNA    |
| .2    | F001A | BN96-16852B | ASSY COVER P-FRONT;UD6050,55,EO,PC+PC,V2   | 1    | SA     |
| ...3  | XT01  | 0201-001578 | ADHESIVE-HM;HM-555,WHT,4,000 Cps           | 0    | SNA    |
| ...3  | T0069 | BN60-00051A | SPACER-FELT;FELT,20.0,0.5,12.0             | 4    | SNA    |
| ...3  |       | BN60-00162C | SPACER-FOAM;FOAM,50000mm,Dark Gray,0.5T,   | 0    | SNA    |
| ...3  |       | BN60-00162W | SPACER-FOAM;FOAM,30000mm,Dark Gray,1T,10   | 4    | SNA    |
| ...3  | CB11P | BN61-07248A | BRACKET-SUPPORT PCB;LD550,SK-5,T0.5,Plat   | 1    | SA     |
| ...3  | CCM1  | BN63-05199C | COVER-SHEET;AMBER,PE,T0.08,W55mm,200M,CL   | 4    | SNA    |
| ...3  | F001  | BN63-07746B | COVER-FRONT;UD6050,55,EO,PC+PC,V2,TP0010   | 1    | SNA    |
| ...4  |       | 0103-007267 | RESIN-PC;RD0005,2.0V0,NH PC,NH PC 2.0 V2   | 444  | SNA    |
| ...4  |       | 0103-007268 | RESIN-PC;TP0010,2.0V0,NH PC,NH PC 2.0 V2   | 747  | SNA    |
| ...4  |       | BN68-00513D | LABEL-RESIN;resin,-,art paper,-,10,25,-,   | 1    | SNA    |
| ...3  |       | BN68-00513E | LABEL-AMS;ams,-,art paper,-,10,38,-,whit   | 1    | SNA    |
| ...3  |       | BN68-03542D | LABEL-01,TV POP;5500,PET,T0.1,100,100,BI   | 1    | SNA    |
| ...3  |       | BN74-00052A | TAPE-PAPER;LB530,Crepe Paper,0.17mm, 10m   | 0    | SNA    |
| ...3  | FB21A | BN96-16729T | ASSY BOARD P-TOUCH FUNCTION & IR;UN55D6000 | 1    | SA     |
| 1     |       | BN91-06862A | ASSY SHIELD;UE55D6000TWXXC                 | 1    | SNA    |
| .2    | CIS1  | 0203-001586 | TAPE-FILAMENT;#893,0.15,30,55,WHT,FILAME   | 0    | SNA    |
| .2    | SCREW | 6003-001782 | SCREW-TAPTYPE;BH,+,B,M4,L12,ZPC(BLK),SWR   | 2    | SA     |
| .2    | EC13  | BN39-01486E | LEAD CONNECTOR;UE55C6000,Flat Connector    | 1    | SNA    |
| .2    | RB01  | BN63-07807C | COVER-BOTTOM;UD5000 37,NH HIPS,V1,BK0020   | 1    | SNA    |
| ...3  |       | 0103-007489 | RESIN-HIPS;FT875,BK,BK0020,V1,HIPS         | 70   | SNA    |
| ...3  |       | BN68-00513D | LABEL-RESIN;resin,-,art paper,-,10,25,-,   | 1    | SNA    |
| .2    |       | BN73-00211C | PAD GAP;UN32D6500,PAD GAP,4.5 mm,35mm*35   | 1    | SNA    |
| .2    | FB03A | BN96-17107B | ASSY BOARD P-RF MODULE;Bluetooth Module,   | 1    | SA     |
| .2    | FL06  | BN96-17116K | ASSY CABLE P-FFC;UE55C8000,FFC,425mm,51P   | 1    | SA     |
| .2    | SP01A | BN96-18088A | ASSY SPEAKER P;6ohm,4pin,15W,Enclosure t   | 1    | SA     |
| 1     | M0017 | BN91-06866E | ASSY CHASSIS;UE55D6200TSXXN                | 1    | SNA    |
| .2    | M0014 | BN94-04627N | ASSY PCB MAIN;UE55D6200TSXXN               | 1    | SA     |
| ...3  |       | 0202-001608 | SOLDER-WIRE FLUX;LFC7-107,D0.8,99.3Sn/0.   | 0    | SNA    |
| ...3  | HDP01 | BN61-06644A | HOLDER-PCB;LC750,NYNOL66,V0                | 1    | SA     |
| ...3  | CB01  | BN61-07083H | BRACKET-AV;UD6400,PCM,T0.45,BKN-P824,EUR   | 1    | SNA    |
| ...3  |       | BN97-05444A | ASSY DRM-CI PLUS;BN46-00068A,U55A          | 1    | SNA    |
| ...4  |       | BN46-00068A | KEY CODE-CI PLUS;Genoa,TCTC,SERIAL CODIN   | 1    | SNA    |

| Level | Loc.   | Part Code   | Description & Specification              | Qty. | SA/SNA |
|-------|--------|-------------|------------------------------------------|------|--------|
| ..3   |        | BN97-05511F | ASSY SMD;UE55D6200TSXXN                  | 1    | SNA    |
| ...4  |        | 0202-001477 | SOLDER-CREAM;LST309-M,D20~45um,96.5Sn/3A | 3    | SNA    |
| ...4  | DS01A  | 0401-001056 | DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO | 13   | SA     |
| ...4  |        | 0403-001783 | DIODE-ZENER;BZB84-C6V2,5.8/6.6V,300mW,SO | 16   | SNA    |
| ...4  | D0254  | 0404-001271 | DIODE-SCHOTTKY;SSA34,40V,3000mA,SMA,TP   | 3    | SA     |
| ...4  | D0254  | 0404-001404 | DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23, | 6    | SA     |
| ...4  | T0139  | 0406-001200 | DIODE-TVS;RCLAMP0504F,6/-V,150W,SC-70    | 2    | SA     |
| ...4  | T0139  | 0406-001271 | DIODE-TVS;RCLAMP0524P,6/-V,150W,SLP251   | 1    | SNA    |
| ...4  |        | 0406-001290 | DIODE-TVS;3.0SMCJ20A,22.2/-/24.5V,3000W, | 1    | SNA    |
| ...4  | Q101   | 0501-000445 | TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT | 2    | SA     |
| ...4  |        | 0501-000669 | TR-SMALL SIGNAL;KTA1505Y,PNP,150mW,SOT-2 | 1    | SA     |
| ...4  | CEQ2   | 0505-000110 | FET-SILICON;2N7002,N,60V,115mA,7.5ohm,0. | 4    | SA     |
| ...4  | Q409   | 0505-002386 | FET-SILICON;AO3415AL,P,-20V,-4A,0.045ohm | 2    | SA     |
| ...4  |        | 0505-002854 | FET-SILICON;AO5404E,N,20V,0.5A,0.55ohm,0 | 1    | SNA    |
| ...4  |        | 0505-002894 | FET-SILICON;MMBFJ177LT1G,P,20mA,300ohm,0 | 1    | SNA    |
| ...4  | IC104  | 0801-002630 | IC-CMOS LOGIC;74AHCT1G08,2-INPUT AND GAT | 1    | SA     |
| ...4  | ND51C2 | 0801-002780 | IC-CMOS LOGIC;74LVC1G17,SCHMITT-TRIGGER  | 1    | SA     |
| ...4  | IC104  | 0801-003330 | IC-CMOS LOGIC;Octal buffer,DQFN,20P,4.5x | 3    | SA     |
| ...4  | IC104  | 0802-001012 | IC-CMOS LOGIC;74LCX245,TRANSCEIVER,DQFN, | 1    | SNA    |
| ...4  |        | 0904-002631 | IC-USC;QFN,28P,5.0mm X 5.0mm,12MHz,TP,PL | 1    | SA     |
| ...4  |        | 1001-001683 | IC-VIDEO SWITCH;SiI9489,QFP,128P,14x14x1 | 1    | SNA    |
| ...4  |        | 1001-001686 | IC-ANALOG MULTIPLEX;74LV4052,CMOS,TTSOP, | 1    | SA     |
| ...4  |        | 1103-001500 | IC-EEPROM;AT24C02C-SSHM-T,2Kbit,256x8,SO | 1    | SA     |
| ...4  |        | 1103-001506 | IC-EEPROM;M24512-RMN6TP,512Kbit,64Kx8,SO | 1    | SA     |
| ...4  |        | 1105-002194 | IC-DDR3 SDRAM;K4B1G1646G-BCH9,DDR3 SDRAM | 4    | SA     |
| ...4  |        | 1201-003158 | IC-POWER AMP;TAS5725,PQFP,48P,7x7mm,DUAL | 1    | SA     |
| ...4  | T0087  | 1203-002835 | IC-POSI.FIXED REG.;7805,3P,6.6x6.1mm,PLA | 1    | SA     |
| ...4  | IC703  | 1203-003121 | IC-POSI.FIXED REG.;FAN1112,SOT-223,3P,6. | 1    | SA     |
| ...4  |        | 1203-004363 | IC-VOL. DETECTOR;RT9818C-29PV,SOT-23,3P, | 1    | SA     |
| ...4  |        | 1203-005988 | IC-DC/DC CONVERTER;TPS54620RGY,QFN,14P,3 | 1    | SA     |
| ...4  |        | 1203-006017 | IC-VOL. DETECTOR;RT9824GJ8,TSOT23,8P,2.9 | 1    | SA     |
| ...4  | T0087  | 1203-006109 | IC-POSI.FIXED REG.;S-1206B33-M3T1G,SOT-2 | 1    | SA     |
| ...4  | T0087  | 1203-006130 | IC-POSI.FIXED REG.;S-1172B25-U5T1G,SOT-8 | 1    | SA     |
| ...4  | T0087  | 1203-006135 | IC-POSI.FIXED REG.;AP1117D-33-GZ-13-89,T | 2    | SA     |
| ...4  | T0087  | 1203-006136 | IC-POSI.FIXED REG.;AP1117D-18-GZ-13-89,T | 1    | SA     |
| ...4  | T0087  | 1203-006141 | IC-POSI.FIXED REG.;S-1172B33-U5T1G,SOT-8 | 1    | SA     |
| ...4  |        | 1203-006619 | IC-DC/DC CONVERTER;AOZ1033AI,SO-8,8P,4.9 | 3    | SA     |
| ...4  |        | 1203-006683 | IC-DC/DC CONVERTER;A8294SESTR-T,QFN,20P, | 1    | SNA    |
| ...4  | IC118  | 1204-003101 | IC-VIDEO PROCESS;SDP94,PBGA,345P,19x19mm | 1    | SA     |
| ...4  |        | 1204-003217 | IC-DECODER;SDP1001,FCBGA,937P,35x35mm,PL | 1    | SA     |

| Level | Loc.   | Part Code   | Description & Specification              | Qty. | SA/SNA |
|-------|--------|-------------|------------------------------------------|------|--------|
| ...4  |        | 1205-003201 | IC-BUS SWITCH;TC7WB125FK,SSOP,8P,2x2.3mm | 1    | SA     |
| ...4  |        | 1205-003479 | IC-SWITCH;TPS2051BDBVR,SOT-23,5P,2.9x1.6 | 3    | SA     |
| ...4  |        | 1205-003733 | IC-SWITCH;AP2191MPG-13,MSOP-8L-EP,8P,2.9 | 1    | SA     |
| ...4  |        | 1205-003735 | IC-SWITCH;AP2151WG-7,SOT25,5P,2.9x1.6mm, | 2    | SA     |
| ...4  |        | 1205-003834 | IC-ETHERNET CONTROLLER;RTL8201E-VC-GRT,Q | 1    | SA     |
| ...4  |        | 1205-004095 | IC-CODEC;AK4686EQ,LQFP,48P,9.0x9.0x1.7mm | 1    | SA     |
| ...4  |        | 1405-001271 | VARISTOR;20Vdc,5A,1.0x0.5x0.6mm,TP       | 28   | SA     |
| ...4  | MR604  | 2007-000137 | R-CHIP;2Kohm,5%,1/16W,TP,1005            | 5    | SNA    |
| ...4  | R105   | 2007-000138 | R-CHIP;100ohm,5%,1/16W,TP,1005           | 19   | SA     |
| ...4  | AR49   | 2007-000140 | R-CHIP;1Kohm,5%,1/16W,TP,1005            | 30   | SNA    |
| ...4  | MR306  | 2007-000141 | R-CHIP;2.2Kohm,5%,1/16W,TP,1005          | 14   | SNA    |
| ...4  | R319   | 2007-000143 | R-CHIP;4.7Kohm,5%,1/16W,TP,1005          | 52   | SNA    |
| ...4  |        | 2007-000146 | R-CHIP;6.8Kohm,5%,1/16W,TP,1005          | 1    | SNA    |
| ...4  | R104   | 2007-000148 | R-CHIP;10Kohm,5%,1/16W,TP,1005           | 23   | SA     |
| ...4  | HDR2   | 2007-000151 | R-CHIP;15Kohm,5%,1/16W,TP,1005           | 1    | SNA    |
| ...4  | MR36   | 2007-000153 | R-CHIP;22Kohm,5%,1/16W,TP,1005           | 1    | SNA    |
| ...4  | AR43   | 2007-000155 | R-CHIP;27Kohm,5%,1/16W,TP,1005           | 1    | SNA    |
| ...4  | MR13   | 2007-000157 | R-CHIP;47Kohm,5%,1/16W,TP,1005           | 24   | SNA    |
| ...4  | DR39   | 2007-000162 | R-CHIP;100Kohm,5%,1/16W,TP,1005          | 9    | SNA    |
| ...4  | R509   | 2007-000170 | R-CHIP;1Mohm,5%,1/16W,TP,1005            | 4    | SNA    |
| ...4  | R111   | 2007-000171 | R-CHIP;0ohm,5%,1/16W,TP,1005             | 19   | SNA    |
| ...4  | HDR17  | 2007-000172 | R-CHIP;10ohm,5%,1/16W,TP,1005            | 6    | SNA    |
| ...4  | R338   | 2007-000173 | R-CHIP;22ohm,5%,1/16W,TP,1005            | 28   | SNA    |
| ...4  | UR23   | 2007-000174 | R-CHIP;47ohm,5%,1/16W,TP,1005            | 3    | SNA    |
| ...4  |        | 2007-000231 | R-CHIP;1.3Kohm,1%,1/10W,TP,1608          | 2    | SA     |
| ...4  | MR39   | 2007-000242 | R-CHIP;1.5Kohm,5%,1/16W,TP,1005          | 1    | SNA    |
| ...4  | RT01   | 2007-000483 | R-CHIP;1ohm,5%,1/8W,TP,2012              | 2    | SNA    |
| ...4  |        | 2007-000758 | R-CHIP;330Kohm,5%,1/16W,TP,1005          | 1    | SNA    |
| ...4  | DR37   | 2007-000932 | R-CHIP;470ohm,5%,1/16W,TP,1005           | 4    | SNA    |
| ...4  | VR88   | 2007-001116 | R-CHIP;680ohm,1%,1/10W,TP,1608           | 1    | SA     |
| ...4  |        | 2007-001168 | R-CHIP;75ohm,5%,1/4W,TP,3216             | 2    | SA     |
| ...4  |        | 2007-001288 | R-CHIP;18ohm,5%,1/16W,TP,1005            | 4    | SA     |
| ...4  | OTR1   | 2007-001292 | R-CHIP;33ohm,5%,1/16W,TP,1005            | 11   | SNA    |
| ...4  | DR43   | 2007-001298 | R-CHIP;51ohm,5%,1/16W,TP,1005            | 1    | SNA    |
| ...4  | MR31   | 2007-001305 | R-CHIP;120ohm,5%,1/16W,TP,1005           | 1    | SNA    |
| ...4  | CER07  | 2007-001308 | R-CHIP;200ohm,5%,1/16W,TP,1005           | 1    | SNA    |
| ...4  | R19548 | 2007-001311 | R-CHIP;270ohm,5%,1/16W,TP,1005           | 1    | SA     |
| ...4  | R16    | 2007-001313 | R-CHIP;330ohm,5%,1/16W,TP,1005           | 1    | SNA    |
| ...4  |        | 2007-001316 | R-CHIP;820ohm,5%,1/16W,TP,1005           | 1    | SA     |
| ...4  | R326   | 2007-001325 | R-CHIP;3.3Kohm,5%,1/16W,TP,1005          | 1    | SNA    |

| Level | Loc.  | Part Code   | Description & Specification              | Qty. | SA/SNA |
|-------|-------|-------------|------------------------------------------|------|--------|
| ...4  | PR24  | 2007-002970 | R-CHIP;56ohm,5%,1/16W,TP,1005            | 1    | SA     |
| ...4  | DR8   | 2007-007001 | R-CHIP;3.9Kohm,5%,1/16W,TP,1005          | 1    | SA     |
| ...4  | PR8   | 2007-007015 | R-CHIP;13Kohm,5%,1/16W,TP,1005           | 1    | SNA    |
| ...4  |       | 2007-007100 | R-CHIP;10Mohm,5%,1/16W,TP,1005           | 1    | SA     |
| ...4  |       | 2007-007132 | R-CHIP;15Kohm,1%,1/16W,TP,1005           | 2    | SA     |
| ...4  |       | 2007-007134 | R-CHIP;39Kohm,1%,1/16W,TP,1005           | 1    | SA     |
| ...4  |       | 2007-007135 | R-CHIP;18Kohm,1%,1/16W,TP,1005           | 3    | SNA    |
| ...4  |       | 2007-007137 | R-CHIP;1.2Kohm,1%,1/16W,TP,1005          | 4    | SA     |
| ...4  |       | 2007-007138 | R-CHIP;27Kohm,1%,1/16W,TP,1005           | 1    | SNA    |
| ...4  | DR4   | 2007-007142 | R-CHIP;10Kohm,1%,1/16W,TP,1005           | 22   | SNA    |
| ...4  |       | 2007-007156 | R-CHIP;1ohm,5%,1/16W,TP,1005             | 4    | SNA    |
| ...4  |       | 2007-007306 | R-CHIP;100ohm,1%,1/16W,TP,1005           | 2    | SNA    |
| ...4  |       | 2007-007318 | R-CHIP;1Kohm,1%,1/16W,TP,1005            | 13   | SNA    |
| ...4  | HDR44 | 2007-007470 | R-CHIP;7.5Kohm,1%,1/16W,TP,1005          | 4    | SNA    |
| ...4  |       | 2007-007488 | R-CHIP;75Kohm,1%,1/16W,TP,1005           | 1    | SNA    |
| ...4  |       | 2007-007517 | R-CHIP;240ohm,1%,1/16W,TP,1005           | 6    | SNA    |
| ...4  |       | 2007-007617 | R-CHIP;2.49Kohm,1%,1/10W,TP,1608         | 1    | SA     |
| ...4  |       | 2007-007698 | R-CHIP;5.1Kohm,1%,1/16W,TP,1005          | 2    | SNA    |
| ...4  |       | 2007-007730 | R-CHIP;6.8Mohm,1%,1/10W,TP,1608          | 1    | SA     |
| ...4  |       | 2007-007797 | R-CHIP;44.2ohm,1%,1/10W,TP,1608          | 2    | SA     |
| ...4  | MR11  | 2007-008015 | R-CHIP;75ohm,1%,1/16W,TP,1005            | 18   | SNA    |
| ...4  |       | 2007-008137 | R-CHIP;24Kohm,1%,1/16W,TP,1005           | 3    | SNA    |
| ...4  |       | 2007-008263 | R-CHIP;3Kohm,1%,1/16W,TP,1005            | 2    | SA     |
| ...4  |       | 2007-008275 | R-CHIP;30Kohm,1%,1/16W,TP,1005           | 1    | SNA    |
| ...4  |       | 2007-008391 | R-CHIP;6.34Kohm,1%,1/16W,TP,1005         | 2    | SA     |
| ...4  |       | 2007-009853 | R-CHIP;1.6Kohm,1%,1/16W,TP,1005          | 1    | SNA    |
| ...4  | ZRN10 | 2011-001261 | R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2. | 4    | SA     |
| ...4  | DAR09 | 2011-001262 | R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2. | 8    | SA     |
| ...4  |       | 2011-001345 | R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,2 | 2    | SA     |
| ...4  | DRP29 | 2011-001396 | R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP, | 2    | SA     |
| ...4  |       | 2011-001449 | R-NETWORK;22ohm,5%,1/16W,L,4P,TP,1010    | 12   | SA     |
| ...4  |       | 2011-001497 | R-NETWORK;470ohm,5%,1/16W,L,CHIP,4P,TP,1 | 2    | SNA    |
| ...4  |       | 2011-001519 | R-NETWORK;33OHM,5%,1/16W,L,CHIP,4P,TP,1. | 1    | SA     |
| ...4  |       | 2011-001527 | R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,4P,TP, | 4    | SNA    |
| ...4  | PC43  | 2203-000233 | C-CER,CHIP;0.1nF,5%,50V,C0G,TP,1005      | 11   | SA     |
| ...4  | DC54  | 2203-000278 | C-CER,CHIP;0.01nF,0.5pF,50V,C0G,TP,1005  | 1    | SA     |
| ...4  | DC2   | 2203-000330 | C-CER,CHIP;0.012nF,5%,50V,C0G,TP,1005    | 8    | SA     |
| ...4  | DC1   | 2203-000386 | C-CER,CHIP;0.015nF,5%,50V,C0G,TP,1005    | 8    | SA     |
| ...4  | MC302 | 2203-000425 | C-CER,CHIP;0.018nF,5%,50V,C0G,TP,1005    | 2    | SA     |
| ...4  | C254  | 2203-000438 | C-CER,CHIP;1nF,10%,50V,X7R,TP,1005       | 10   | SA     |

| Level | Loc.   | Part Code    | Description & Specification              | Qty. | SA/SNA |
|-------|--------|--------------|------------------------------------------|------|--------|
| ...4  | C507   | 2203-000489  | C-CER,CHIP;2.2nF,10%,50V,X7R,TP,1005     | 4    | SA     |
| ...4  | V1233  | 2203-000575  | C-CER,CHIP;220nF,10%,25V,X7R,TP,2012     | 8    | SNA    |
| ...4  | AD480  | 2203-000714  | C-CER,CHIP;3.3nF,10%,50V,X7R,TP,1005,-   | 5    | SA     |
| ...4  | DC25   | 2203-000812  | C-CER,CHIP;0.033nF,5%,50V,C0G,TP,1005    | 7    | SA     |
| ...4  | AD480  | 2203-000995  | C-CER,CHIP;0.047nF,5%,50V,C0G,TP,1005    | 4    | SA     |
| ...4  | AD480  | 2203-002285  | C-CER,CHIP;10nF,10%,50V,X7R,TP,1005      | 20   | SNA    |
| ...4  | DC18   | 2203-005138  | C-CER,CHIP;1.8nF,10%,50V,X7R,1005        | 5    | SA     |
| ...4  | C231   | 2203-005221  | C-CER,CHIP;15nF,10%,50V,X7R,1608         | 1    | SNA    |
| ...4  | AAC1   | 2203-005249  | C-CER,CHIP;100nF,10%,50V,X7R,TP,1608     | 19   | SNA    |
| ...4  | AD480  | 2203-005344  | C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,0.5T | 16   | SNA    |
| ...4  | PC8    | 2203-005642  | C-CER,CHIP;0.22nF,5%,50V,NP0,1005        | 2    | SNA    |
| ...4  | AD480  | 2203-005968  | C-CER,CHIP;4.7nF,10%,50V,X7R,TP,1005,0.5 | 3    | SNA    |
| ...4  | VC37   | 2203-006048  | C-CER,CHIP;100nF,10%,10V,X7R,TP,1005     | 209  | SA     |
| ...4  | AD480  | 2203-006126  | C-CER,CHIP;47nF,10%,16V,X7R,TP,1005      | 7    | SNA    |
| ...4  | C802   | 2203-006348  | C-CER,CHIP;1000nF,10%,25V,X5R,TP,1608    | 5    | SA     |
| ...4  | C125   | 2203-006361  | C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012   | 27   | SC     |
| ...4  | AD480  | 2203-006460  | C-CER,CHIP;2200nF,10%,16V,X5R,TP,1608,-  | 2    | SA     |
| ...4  | HE4    | 2203-006474  | C-CER,CHIP;22000nF,20%,6.3V,X5R,2012     | 8    | SA     |
| ...4  | HDC11  | 2203-006562  | C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005    | 41   | SNA    |
| ...4  | AD480  | 2203-006824  | C-CER,CHIP;4700nF,10%,10V,X5R,1608       | 11   | SNA    |
| ...4  | AD480  | 2203-006841  | C-CER,CHIP;1000nF,10%,16V,X5R,TP,1005    | 1    | SNA    |
| ...4  | C23    | 2203-006890  | C-CER,CHIP;10000nF,20%,6.3V,X5R,1608     | 62   | SNA    |
| ...4  | AD480  | 2203-006992  | C-CER,CHIP;0.33nF,5%,50V,C0G,TP,1005     | 2    | SNA    |
| ...4  | AD480  | 2203-007306  | C-CER,CHIP;10000nF,10%,25V,X5R,TP,2012,1 | 4    | SNA    |
| ...4  | AD480  | 2203-007513  | C-CER,CHIP;10000nF,10%,10V,X5R,TP,1608   | 6    | SA     |
| ...4  |        | 2402-001403  | C-AL,SMD;100uF,20%,35V,TP,10.3X10.3      | 2    | SNA    |
| ...4  | T0052  | 2703-000158  | INDUCTOR-SMD;1uH,10%,2012                | 3    | SA     |
| ...4  | S1Q036 | 12703-000408 | INDUCTOR-SMD;3.3uH,20%,3225              | 1    | SA     |
| ...4  | T0052  | 2703-001239  | INDUCTOR-SMD;3.3uH,10%,1608              | 8    | SA     |
| ...4  | T0052  | 2703-002268  | INDUCTOR-SMD;8.2nH,5%,1005               | 2    | SNA    |
| ...4  | T0052  | 2703-003713  | INDUCTOR-SMD;1.5uH,20%,7366              | 1    | SA     |
| ...4  | T0052  | 2703-003790  | INDUCTOR-SMD;4.7uH,20%,8080              | 3    | SA     |
| ...4  |        | 2703-003879  | INDUCTOR-SMD;33uH,20%,10.0mmX10.0mm      | 1    | SA     |
| ...4  |        | 2703-003930  | INDUCTOR-SMD;4.7uH,20%,5050              | 4    | SA     |
| ...4  | X202   | 2801-003948  | CRYSTAL-SMD;12MHz,30ppm,28-AAN,12pF,60oh | 1    | SA     |
| ...4  | PX1    | 2801-004021  | CRYSTAL-SMD;24.576MHz,20ppm,28-AAN,12pF, | 1    | SA     |
| ...4  | X202   | 2801-004629  | CRYSTAL-SMD;27MHz,20ppm,12pF,50ohm,TP    | 1    | SNA    |
| ...4  | X202   | 2801-004734  | CRYSTAL-SMD;25.000000MHz,20ppm,28-AAN,12 | 1    | SA     |
| ...4  | X202   | 2801-004774  | CRYSTAL-SMD;24MHz,30ppm,14pF,30ohm,TP    | 2    | SA     |
| ...4  | X202   | 2801-004775  | CRYSTAL-SMD;12MHz,30ppm,16pF,30ohm,TP    | 1    | SNA    |

| Level | Loc.   | Part Code   | Description & Specification              | Qty. | SA/SNA |
|-------|--------|-------------|------------------------------------------|------|--------|
| ...4  | F103   | 2901-001506 | FILTER-EMI SMD;5V,0.13A,0pF,2x1x0.5mm,TP | 2    | SA     |
| ...4  | DR32   | 3301-000314 | BEAD-SMD;120ohm,1.6x0.8x0.8mm,-,-,-      | 12   | SNA    |
| ...4  | T0568  | 3301-001236 | BEAD-SMD;60ohm,1608                      | 3    | SNA    |
| ...4  | T0568  | 3301-002039 | BEAD-SMD;26ohm,1608,TP                   | 48   | SA     |
| ...4  | F201   | 3601-001374 | FUSE-SURFACE MOUNT;32V,5A,FAST-ACTING,Hi | 1    | SA     |
| ...4  | CN401  | 3701-001724 | CONNECTOR-DSUB;15P,3ROW,FEMALE,ANGLE,NI  | 1    | SA     |
| ...4  | CN601  | 3701-001736 | CONNECTOR-HDMI;19P,2ROW,FEMALE,SMD-A     | 4    | SA     |
| ...4  | CN303  | 3707-001104 | CONNECTOR-OPTICAL;SMD-A(Ultra Slim),SPDI | 1    | SA     |
| ...4  |        | 3710-002276 | SOCKET-INTERFACE;24P,1R,0.5mm,SMD-A,AU,B | 1    | SA     |
| ...4  |        | 3710-003374 | CONNECTOR-SOCKET;64P,2R,0.5mm,ANGLE,NI+S | 1    | SA     |
| ...4  | HB01A  | 3711-005925 | HEADER-BOARD TO CABLE;BOX,51P,1R,0.5mm,S | 1    | SA     |
| ...4  | HB01A  | 3711-007319 | HEADER-BOARD TO CABLE;SMD,4P,1R,2.50mm,S | 1    | SA     |
| ...4  |        | 3711-007571 | CONNECTOR-HEADER;BOX,18P,2R,2.0mm,ANGLE, | 1    | SA     |
| ...4  | EH01   | 3711-007742 | HEADER-BOARD TO CABLE;BOX,20P,2R,2mm,ANG | 1    | SA     |
| ...4  | CN1501 | 3722-003044 | JACK-USB;4P/1C,NI,BLK,SMD-A,A-TYPE       | 3    | SA     |
| ...4  | CN302  | 3722-003158 | JACK-PHONE;1/6P,NI,BLK,ANGLE             | 2    | SA     |
| ...4  | CN1701 | 3722-003199 | JACK-MODULAR;8P/8C,ANGLE,AU,1P           | 1    | SA     |
| ...4  | CN501  | 3722-003207 | JACK-PHONE;2P/9C,AU,LIMEGRN,SMD-A(DIP)   | 1    | SA     |
| ...4  | ET01   | BN40-00217A | TUNER;DNSS243VH142A,DNSS243VH142A,DVB-TC | 1    | SA     |
| ...4  |        | BN41-01683A | PCB MAIN;FR-4,4,1.2T,192x240             | 1    | SNA    |
| ...4  |        | BN97-05338A | ASSY MICOM-INAND;T-GAS6DEUC-1004.0,2011. | 1    | SNA    |
| ....5 |        | 1107-001983 | IC-NAND FLASH;SDIN5D2-2G-944D,2GByte,BGA | 1    | SNA    |
| ...4  |        | BN97-05339A | ASSY MICOM;T-GAS6DEUC-XXXX,U69A,KFG1GN6W | 1    | SNA    |
| ....5 |        | 1107-001990 | IC-NAND FLASH;KFG1GN6W2D-HIB6,1Gbit,64Mx | 1    | SA     |
| ...4  |        | BN97-05512A | ASSY MICOM;T-GENDEUS1-XXXX,U69A, U68A,20 | 1    | SNA    |
| ....5 |        | 0903-001718 | IC-MICROCONTROLLER;61P805-RG480WT,LQFP,4 | 1    | SNA    |
| 1     |        | BN91-07354A | ASSY LCM-AMLCD VD;BN95-00466A,BN44-00457 | 1    | SNA    |
| .2    | M-P    | 6001-002653 | SCREW-MACHINE;BH,+,M3,L6,ZPC(WHT),SWRCH1 | 5    | SA     |
| .2    | P001A  | BN44-00457A | DC VSS-LED TV PD BD;PD55A1D_BHS,PD55A1D_ | 1    | SA     |
| .2    | PANEL  | BN95-00466A | PRODUCT LCD;6K 55 3D_LTJ550HW03-V        | 1    | SA     |
| ..3   | TCON   | BN96-16498A | ASSY PCB P-T-CON;LSJ550HW01-S,FR4,SUWON, | 1    | SA     |
| 1     |        | BN92-07871A | ASSY P/MATERIAL;UD6000,55                | 1    | SNA    |
| .2    | T0214  | 0203-001269 | TAPE-OPP MASKING;#301,T0.06,W75,L50000,N | 1    | SNA    |
| .2    |        | 6902-000379 | BAG AIR;LDPE,T0.2,W1000,L1800,TRP,1260.0 | 1    | SNA    |
| .2    | M040   | 6922-000003 | BAND PP;PP,T0.8,W18,L1650M,TRP,DA69-9014 | 1    | SNA    |
| .2    | T0214  | AA61-20285C | HOLDER-BOX;CORAL,PP,BLACK,HB,17.5g       | 4    | SNA    |
| .2    |        | BN68-02422B | LABEL-WARNING SHIPPING;ALL MODEL,A/P 100 | 1    | SNA    |
| .2    |        | BN69-03982C | PAD PACKING-EDGE;LB6T,PAPER,6,120,1690,- | 1    | SNA    |
| .2    |        | BN69-05184N | PALLET;50D5000,WOOD,1575,1190,135,20000, | 1    | SNA    |
| .2    |        | BN69-05418A | PACKING-BAG WRAPPING;-LDPE,-,0,019,500,  | 3    | SNA    |

| Level | Loc.  | Part Code   | Description & Specification                | Qty. | SA/SNA |
|-------|-------|-------------|--------------------------------------------|------|--------|
| .2    |       | BN69-05692A | CUSHION-SET;UD6100 55",EPS,EXPORT, DENSE   | 1    | SNA    |
| .2    |       | BN69-05791A | CUSHION-FRONT;55UD7000,EPS                 | 1    | SNA    |
| .2    |       | BN69-06642B | PACKING-PAD;PAD,PAPER,-,-,CB-SW4,1500,11   | 1    | SNA    |
| .2    |       | BN69-06675A | PACKING-SHEET PALLET;PACKING SHEET PALLE   | 1    | SNA    |
| .2    |       | BN69-06679A | PACKING-BAG SHEET ROLL;-,-,CB,-,FOAM 0,5mm | 4    | SNA    |
| .2    |       | BN74-00008D | TAPE-OPP MASKING;OPP,T0.05,W75,L800M,CLR   | 2    | SNA    |
| 1     |       | BN92-07940C | ASSY BOX;UD6050(6200),55,EO(SATELLITE)     | 1    | SNA    |
| .2    |       | BH68-00662A | LABEL BOX-00;ALL MODEL,MOJO 90G,60,110,W   | 1    | SNA    |
| .2    |       | BN69-06120A | BOX-SET,OUT;55UD6200,CB,C-03,DW3, YEL,W1   | 1    | SNA    |
| .2    |       | BN69-06462A | BOX-SET,IN;55UD6000,CB,C-01,DW1, YEL,W18   | 1    | SNA    |
| 1     |       | BN92-08062G | ASSY LABEL;UE55D6000TWXXC                  | 1    | SNA    |
| .2    |       | BN68-03652M | LABEL-STICKER;UD6U,T0.05,60,120,Energy R   | 1    | SNA    |
| .2    | T0527 | BP68-00052B | LABEL-00,RATING;CCTV,TETRON PAPER,T0.05,   | 1    | SNA    |
| 1     | ACCE1 | BN92-08063A | ASSY ACCESSORY;UE32D6300SSXXN              | 1    | SNA    |
| .2    | ACCE4 | BN96-18581A | ASSY ACCESSORY-MANUAL;UE32D6300SSXXN       | 1    | SNA    |
| ..3   |       | 6902-000476 | BAG PE;LDPE,T0.03,W250,L350,TRP,Recycle,   | 1    | SNA    |
| ..3   |       | BN68-00514K | MANUAL FLYER-WARRANTY CARD;comm,Samsung,   | 1    | SNA    |
| ..3   |       | BN68-03019A | LEAFLET-SAFETY GUIDE;ALL,SAMSUNG,28LENGS   | 1    | SNA    |
| ..3   |       | BN68-03476E | MANUAL USERS;UD6300,6320,Samsung,4Langs,   | 1    | SNA    |
| ..3   |       | BN68-03602F | MANUAL FLYER-01,SAMART TV GUIDE;UD5500~,   | 1    | SNA    |
| .2    | ACCE2 | BN96-18581C | ASSY ACCESSORY-CABEL;UE32D6200TSXXN        | 1    | SNA    |
| ..3   |       | 3709-001663 | CONNECTOR-CARD EDGE;64P,0.5mm,MALE,PCMC    | 1    | SA     |
| ..3   | EC11  | 3903-000525 | CBF-POWER CORD;DT,CEE,LP-21L,250V,2.5A,B   | 1    | SA     |
| ..3   | T0120 | 4301-000121 | BATTERY-MN;1.5V,R03,10.5x44.5m,HOLDER,7.   | 2    | SNA    |
| ..3   |       | 6902-001340 | BAG PE;LDPE,T0.05,W250,L350,TRP,RECYCLE    | 1    | SNA    |
| ..3   | REMO2 | AA59-00507A | REMOCON;TM1050,49,3V,EUROPE iDTV,6320,63   | 1    | SA     |
| ..3   | EC03  | BN39-01154A | CBF SIGNAL;Chelsea Slim,24P/20P,30AWG,20   | 1    | SA     |
| ..3   | EC03  | BN39-01154W | CBF SIGNAL;COMPONENT GENDER / UD8000,2P,   | 1    | SA     |
| ..3   |       | BN61-05491A | HOLDER-WIRE STAND;UB7000 46inch,NYRON      | 1    | SNA    |
| ..3   | M9889 | BN63-01798B | CLOTH-CLEAN;cloth,180,200,sea blue,ToC     | 1    | SNA    |
| ..3   | T0527 | BN68-00513A | LABEL-E,PASS;ALL MODEL,YUPO(110G),50X15,   | 1    | SNA    |
| ..3   | EH03A | BN96-18153A | ASSY HOLDER P-RING;11 LED-TV               | 1    | SNA    |
| ...4  |       | 6902-001404 | BAG ZIPPER;LDPE,T0.05,W80,L100,TRP         | 1    | SNA    |
| ...4  | AH365 | BN61-07295A | HOLDER-RING;40UD5500,ABS,BK0007,HB         | 4    | SNA    |