


1. Exploded View & Part List

Exploded View

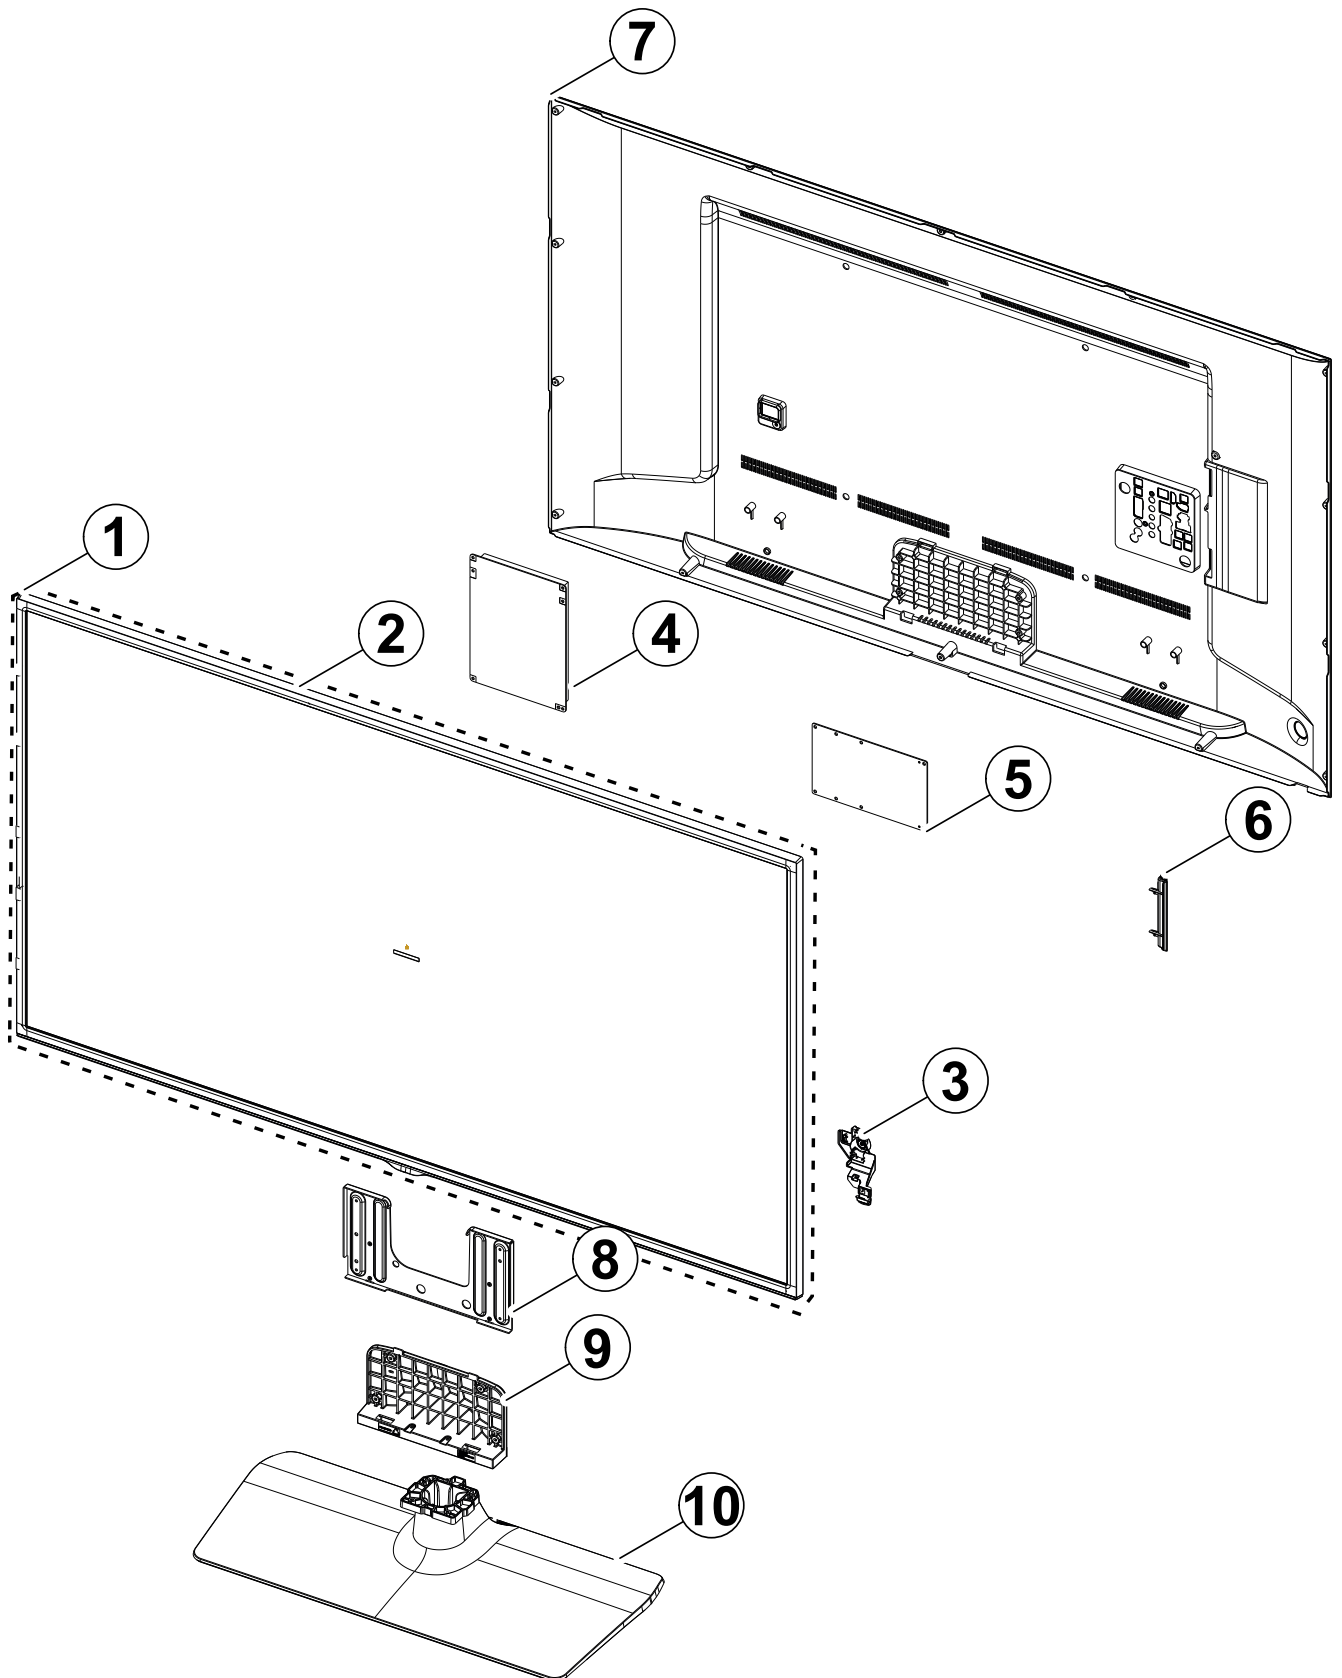

Parts List

No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
1	2	PANEL	BN95-01724A	PRODUCT LCD-INX; v580HJ1,CY-HH058BGNV1H/V	SA	1
2	3	TC01A	BN96-33358A	ASSY CHASSIS TOP P; Y14 F-LED 58,PC+ABS+G	SA	1
3	2	FB01A	BN96-30902V	ASSY BOARD P-FUNCTION; UH5200,Function As	SA	1
4	2	P001A	BN44-00787A	DC VSS-LED TV PD BD; L58GFB_ESM,L58GFB_ES	SA	1
5	2	M0014	BN94-07903G	ASSY PCB MAIN; UH5203 58"	SA	1
6	3		BN61-11154A	HOLDER-SIDE AV; UH5203,HIPS,EO	SNA	1
7	2	R001A	BN96-34022D	ASSY COVER P-REAR; H5200 58",MASTER,PC+AB	SA	1
8	3		BN61-07962B	BRACKET-STNAD LINK; UE6030 55",SECC,T1.6,	SA	1
9	2	SG01A	BN96-33524A	ASSY GUIDE P-STAND; UH5200 58,PC+G/F20%,B	SA	1
10	2	SB04A	BN96-33225A	ASSY STAND P-BASE; UH5200 58",PC+ABS,V0,B	SA	1

2. Electrical Parts List

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
			UE58H5273SSXZG (IS01)		
1		BN90-05304X	ASSY W/I;UN40F6400AFXZA	1	SNA
.2		BN81-08159Z	PART SET-ELEC W/I;UF4~UF8,UH4~UH9 ELEC	1	SNA
.2		BN81-09500R	PART SET-MECH W/I;UH5H,U58HF*	1	SNA
1	S001A	BN90-06093A	ASSY STAND;UH 5000	1	SNA
.2	SB04A	BN96-33225A	ASSY STAND P-BASE;UH5200 58",PC+ABS,V0,B	1	SA
..3	SCREW	6001-003041	SCREW-MACHINE;FH,+,M4,L8,ZPC(BLK),SWRCH1	5	SA
..3	SCREW	6003-001782	SCREW-TAPTYPE;BH,+,B,M4,L12,ZPC(BLK),SWR	4	SA
..3		BN60-00162N	SPACER-FOAM;FOAM,30000mm,Dark Gray,1T,15	1	SNA
..3		BN61-10856A	BRACKET-STAND,BASE;H5200,58,SECC,2.0	1	SNA
..3		BN61-10895A	GUIDE-STAND,NECK;UH5200 58",PC+GF20%,BK0	1	SNA
..3	CCM1	BN63-02183E	SHEET-COVER;Rhcm,PE,T0.04,750mm,200M,HB,	0	SNA
..3		BN63-12618A	COVER-STAND BASE;UH5200 58",ABS+PC,V0,BL	1	SNA
..3		BN67-00327D	RUBBER-FOOT;STAND,SILICON,13*13,T2,GRAY(	6	SNA
.2	SG01A	BN96-33524A	ASSY GUIDE P-STAND;UH5200 58,PC+G/F20%,B	1	SA
..3	SG03	BN61-10894A	GUIDE-STAND;UH5200 58",PC+GF20%,BK0007,V	1	SNA
...4		0103-007285	RESIN PC;HF3200H,K21294,BK0007,V2	1.5mm	300
...4		BN68-00513D	LABEL-RESIN;resin,-,art paper,-,10,25,-,	1	SNA
..3		BN69-08751A	WRAP VINYL-SHRINK;STAND,PLASTIC OTHERS,P	0	SNA
..3		BN96-29120C	ASSY ACCESSORY-SCREW;6003-001782,8EA,LED	1	SNA
...4	SCREW	6003-001782	SCREW-TAPTYPE;BH,+,B,M4,L12,ZPC(BLK),SWR	8	SA
...4		BN69-09241C	PACKING-BAG-SCREW;LDPE,0.05,70,90,,TRP,	1	SNA
1	R001A	BN90-06169E	ASSY COVER REAR;UH5203 58"	1	SNA
.2	SCREW	6001-003074	SCREW-MACHINE;BH,+,M3,L6,ZPC(BLK),SWRCH1	4	SA
.2	SCREW	6003-001782	SCREW-TAPTYPE;BH,+,B,M4,L12,ZPC(BLK),SWR	16	SA
.2	R001A	BN96-34022D	ASSY COVER P-REAR;H5200 58",MASTER,PC+AB	1	SA
..3		BN63-10851B	SHEET-COVER;UF4000,PET,0.1,32,22,BLACK	2	SNA
..3	R001	BN63-12619P	COVER-REAR;H5203, 58",ABS+PC,V0,BLK,MAST	1	SNA
...4		0103-005041	RESIN PC ABS;FR3200TV,901408,BK0008,1.2m	3750	SNA
..3	T0071	BN64-02773B	INLAY-TERMINAL;H6203,PS,T0.4,W165.4,L147	1	SNA
..3		BN68-05603A	LABEL-E,PASS;ALL MODEL,ART 90G,60,15,W/W	1	SNA
..3		BN68-06629A	LABEL-TERMINAL,SIDE;H5203,PET,T0.125,W14	1	SNA
1		BN91-12976A	ASSY LCM-AMLCD;BN95-01724A,CY-HH058BGNV1	1	SNA
.2	PANEL	BN95-01724A	PRODUCT LCD-INX;v580HJ1,CY-HH058BGNV1H/V	1	SA
..3	SCREW	6001-003075	SCREW-MACHINE;BH,+,M3,L4,ZPC(WHT),SWRCH1	6	SA
..3		BN61-07962B	BRACKET-STNAD LINK;UE6030 55",SECC,T1.6,	1	SA
..3	M0131	BN63-00520A	GASKET;APPOLO _PAL,Conductive Fabric,0.13	8	SNA
..3		BN68-05722A	LABEL-STICKER;ALL MODEL,POLYPROPYLENE,0.	1	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...3		BN90-05987A	ASSY MISC-BLU;MEGA MODEL,CY-HH058BGNV1V	1	SNA
...4		BN02-00102B	TAPE FILAMENT;UE7000,#8917,0.15,25,50,WH	3	SNA
...4		BN61-07891A	SUPPORT-PLATE;Y12 FULL LED,PC,V2,CLEAR	6	SNA
...4		BN61-10791A	LGP-DIFFUSER PLATE;58inch Mega, Diffuse	1	SNA
...4		BN62-00635A	INSULATION-SOURCE PCB R;Y14 58",PC,0.25,	1	SNA
...4		BN62-00635B	INSULATION-SOURCE PCB L;Y14 58",PC,0.25,	1	SNA
...4		BN63-12638A	SHEET-COMPLEX;MEGA 58inch G230-54,PET,0.	1	SNA
...4		BN63-12640A	SHEET-REFLECTOR;MEGA 58inch UXJP175,PET,	1	SNA
...4		BN96-32771A	ASSY LED BAR P-LED BAR;58inch Left,Direc	6	SNA
...4		BN96-32772A	ASSY LED BAR P-LED BAR;58inch Right,Dire	6	SNA
...4		BN96-33354A	ASSY CHASSIS BOTTOM P;Y14 F-LED 58,MEGA,	1	SNA
....5		AK63-00675A	GASKET;BD-C7500,Conductive Fabric,2mm,5m	4	SNA
....5		BN02-00040C	TAPE DOUBLE FACE-D-PLATE;F-LED ALL,MKT50	2	SNA
....5		BN02-00074D	TAPE PET;58H5200,PET,T0.05,W40,L40,BLK,3	4	SNA
....5		BN02-00102B	TAPE FILAMENT;UE7000,#8917,0.15,25,50,WH	0	SNA
....5		BN02-00134E	TAPE ETC-SHEET FIXING;SFLED 32/40/46/55/	6	SNA
....5		BN02-00324A	TAPE ABSORBER-DUST;Y14 4K,3M 244,0.085T,	0	SNA
....5	EC13	BN39-01910A	LEAD CONNECTOR;58inch Mega,Lead Connecto	1	SNA
....5		BN61-11027A	HOLDER-SOURCE PCB;H4.2K 58",NYLON66,1.8T	4	SNA
....5		BN62-00501M	INSULATION-PD BOARD 58;Y14 H4.2K 58,PC,0	1	SNA
....5	CC02	BN64-02743A	CHASSIS-BOTTOM;Y14 F-LED 58",EGI-SECC AG	1	SNA
...4		BN96-33355A	ASSY FRAME P-MOLD MIDDLE U;Y14 F-LED 58,	1	SNA
....5		BN61-10803A	FRAME-MOLD MIDDLE U;Y14 F-LED 58",PC+G/F	1	SNA
...4		BN96-33356A	ASSY FRAME P-MOLD MIDDLE D;Y14 F-LED 58,	1	SNA
....5		BN60-00744A	SPACER-RUBBER;Y13 F-LED SLIM,SH-0140U+AT	1	SNA
....5		BN60-00999E	SPACER-PANEL(UD);14 ENTRY MODEL 58",SI,6	2	SNA
....5		BN61-10804A	FRAME-MOLD MIDDLE D;Y14 F-LED 58",PC+G/F	1	SNA
...4		BN96-33357A	ASSY FRAME P-MOLD MIDDLE LR;Y14 F-LED 58	2	SNA
....5		BN60-00999F	SPACER-PANEL(LR);14 ENTRY MODEL 58",SI,7	2	SNA
....5		BN61-10805A	FRAME-MOLD MIDDLE(LR);Y14 F-LED 58",PC+G	2	SNA
...3	FL06	BN96-30782D	ASSY CABLE P-FFC;H7000,FFC,NH,68mm 1,60	2	SNA
...3		BN96-32743A	ASSY OPEN CELL;V580HJ1-PE6,V580HJ1-PE6,1	1	SNA
...4		BN81-10743A	A/S-A/S-IC DRIVER SOURCE;INX 58 FHD 60Hz	1	SNA
...4		BN81-10744A	A/S-A/S-IC DRIVER GATE;INX 58 FHD 60Hz,6	1	SNA
...4		BN81-10745A	A/S-A/S-ASSY PCB-SOURCE (XR);INX 58 FHD	1	SNA
...4		BN81-10746A	A/S-A/S-ASSY PCB-SOURCE (XL);INX 58 FHD	1	SNA
...4		BN81-10747A	A/S-A/S-POLARIZER-C/F;INX 58 FHD 60Hz,41	1	SNA
...4		BN81-10748A	A/S-A/S-POLARIZER-TFT;INX 58 FHD 60Hz,41	1	SNA
...3	TCON	BN96-32745A	ASSY T CON P;V580HJ1-PE6,V580HJ1-PE6,10b	1	SA
...3	TC01A	BN96-33358A	ASSY CHASSIS TOP P;Y14 F-LED 58,PC+ABS+G	1	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		BN60-00667K	SPACER-GASKET;Y13 SF-LED,SI,L22,GRY,T0.2	3	SNA
...4		BN60-00930Z	SPACER-TOP(UD);Y14 VNB 58",PET,L1280,GOL	2	SNA
...4		BN60-01010A	SPACER-CORNER;H4203,GASKET*,9mm,BLK,0.2T	4	SNA
...4		BN60-01071A	SPACER-TOP(LR);Y14 VNB 58",PET,L727,GOLD	2	SNA
...4		BN63-11875Q	SHEET-COVER;Y14 SF-LED,POLY*,0.068,W37,R	1	SNA
...4		BN63-11875S	SHEET-COVER;Y14 SF-LED,POLYESTER,0.068,W	3	SNA
...4	AC157	BN64-02744A	CHASSIS-TOP;Y14 F-LED 58",PC+ABS+G/F15%,	1	SNA
1		BN91-13443B	ASSY SHIELD;UH5200 58"	1	SNA
.2	SCREW	6001-003081	SCREW-MACHINE;PWH,+,M3,L5,ZPC(WHT),SWRCH	13	SA
.2		BN02-00102B	TAPE FILAMENT;UE7000,#8917,0.15,25,50,WH	0	SNA
.2	EC13	BN39-01765A	LEAD CONNECTOR;UE46F5300,Flat Connector	1	SA
.2	EC13	BN39-01889K	LEAD CONNECTOR;UE50H6300,Flat Connector,	1	SA
.2	P001A	BN44-00787A	DC VSS-LED TV PD BD;L58GFB_ESM,L58GFB_ES	1	SA
.2	CB20	BN61-07953A	BRACKET-WALL;UE5000 46",EGI-SECC PL,T1.2	4	SA
.2	M0131	BN63-00520A	GASKET;APPOLO_PAL,Conductive Fabric,0.13	1	SNA
.2	FB01A	BN96-30902V	ASSY BOARD P-FUNCTION;UH5200,Function As	1	SA
.2		BN96-32113E	ASSY SPEAKER P-H5203 58";6ohm,10W,H5203	1	SA
.2	FL06	BN96-33236H	ASSY CABLE P-FFC;58H5203,FFC,NH,500mm,51	1	SA
1	M0017	BN91-13444F	ASSY CHASSIS;UH5203 58"	1	SNA
.2	M0014	BN94-07903G	ASSY PCB MAIN;UH5203 58"	1	SA
..3		BN61-11154A	HOLDER-SIDE AV;UH5203,HIPS,EO	1	SNA
...4		0103-004628	RESIN HIPS;HF-1690H,K2901,BK0020,1.5mm H	13	SNA
..3		BN62-00637A	INSULATION;H6390_Tizen,PET,0.1,10,10,BLK	1	SNA
..3	AH020	BN62-00659A	HEAT SINK;UN55H6203AFXZA,A6063,BLACK	1	SNA
..3		BN62-00670A	INSULATION;H5203,PET,0.1,54,54,BLK	1	SNA
..3		BN63-10091A	GASKET;SB750H,PUR FOAM,10mm,10mm,5mm,Gra	2	SNA
..3		BN97-08594A	ASSY DRM-KEY;NT14,HU7*EU	1	SNA
...4		BN46-00109H	KEY CODE-CERTIFI;MAC,TV/AV,General	1	SNA
...4		BN46-00110N	KEY CODE-CERTIFI;MIRACAST,TV,X12 /X13	1	SNA
...4		BN46-00328B	KEY CODE-CERTIFI;CI+,TV,NT14, EU	1	SNA
..3		BN97-08893L	ASSY SMD;UH5F	1	SNA
...4		0202-001899	SOLDER-CREAM;M705-GRN360-K2-VT,25-36um,S	3	SNA
...4	DS01A	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	SA
...4		0403-001783	DIODE-ZENER;BZB84-C6V2,5.8/6.6V,300mW,SO	4	SNA
...4		0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	2	SA
...4		0404-001787	DIODE-SCHOTTKY;SS3P4,40V,3000mA,DO-220AA	3	SA
...4		0406-001200	DIODE-TVS;RCLAMP0504F,6/-/-V,150W,SC-70	2	SA
...4		0406-001290	DIODE-TVS;3.0SMCJ20A,22.2/-/24.5V,3000W,	1	SNA
...4		0406-001628	DIODE-TVS;AOZ8804ADI,6/-/-V,150W,SLP2510	1	SA
...4		0406-001635	DIODE-TVS;SMF5.0A,6.4V, 6.7V, 7V,200W,SM	5	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		0501-000279	TR-SMALL SIGNAL;KSA1182-Y,PNP,150mW,SOT-	3	SA
...4		0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	4	SC
...4		0505-002560	FET-SILICON;AO6415,P,-20V,-3.3A,0.15ohm,	1	SA
...4		0505-002598	FET-SILICON;AP2317GN,P,-20V,-4.2A,0.052o	1	SA
...4		0505-002893	FET-SILICON;AO4801AS,P,-30V,-5A,2W,SOIC-	1	SA
...4		0505-003397	FET-SILICON;2N7002K,N,60V,380mA,1.19ohm,	5	SA
...4		0801-002780	IC-CMOS LOGIC;74LVC1G17,SCHMITT-TRIGGER	2	SA
...4		0801-003330	IC-CMOS LOGIC;Octal buffer,DQFN,20P,4.5x	1	SA
...4		1001-001860	IC-ANALOG SWITCH;NX5L2750CGU,QFN,10P,1.4	1	SNA
...4		1103-001487	IC-EEPROM;AT24C256C-SSHL-T,256Kbit,32Kx8	1	SA
...4		1105-002527	IC-DDR3 SDRAM;K4B2G1646Q-BCK0,DDR3,2Gbit	1	SA
...4		1105-002529	IC-DDR3 SDRAM;K4B4G1646D-BCK0,DDR3 1600,	1	SA
...4		1201-003183	IC-AUDIO AMP;DRV612,HTSSOP,14P,5x4.4mm,D	1	SA
...4		1201-003690	IC-AUDIO AMP;TAS5747PHPR,QFP,48P,DUAL,PL	1	SA
...4		1203-004363	IC-VOL. DETECTOR;SOT-23,3Z30,2.9x1.6mm,P	1	SA
...4		1203-006017	IC-VOL. DETECTOR;RT9824GJ8,TSOT23,8P,2.9	1	SA
...4		1203-006130	IC-POSIFIXED REG.;S-1172B25-U5T1G,SOT-8	1	SA
...4		1203-007238	IC-PWM CONTROLLER;TPS54427,DDA,8P,4.8x3.	1	SNA
...4		1203-007242	IC-POSIAJUST REG.;G2992BP11U,SOP-8,8P,	1	SA
...4		1203-007667	IC-DC/DC CONVERTER;A8303SESTR-T,QFN,20Z3	1	SNA
...4		1203-008102	IC-POSIFIXED REG.;S-13A1D12-E8001,HSOP,	1	SNA
...4		1203-008104	IC-POSIFIXED REG.;S-13A1D18-E8001,HSOP,	2	SNA
...4		1203-008105	IC-POSIFIXED REG.;S-13A1D33-E8001,HSOP,	1	SNA
...4		1203-008118	IC-DC/DC CONVERTER;AOZ3013PI,SO-8,8P,4.9	3	SNA
...4		1203-008183	IC-DC/DC CONVERTER;AOZ3015PI-1,EPAD SO-8	1	SA
...4		1204-003558	IC-VIDEO PROCESS;SENK15,HS-TFBGA,626P,26	1	SNA
...4		1205-004447	IC-SWITCH;TPS2051CDBVR,SOT23-5,5P,3x1.65	2	SA
...4		1205-004983	IC-SWITCH;BD82032FVJ,TSSOP-B8J,8P,3.0x4.	1	SA
...4		1405-001271	VARISTOR;35V,20Vdc,5A,1.0x0.5x0.6mm,TP,1	25	SA
...4		2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	29	SA
...4		2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	9	SNA
...4		2007-000141	R-CHIP;2.2Kohm,5%,1/16W,TP,1005	6	SNA
...4		2007-000142	R-CHIP;2.7Kohm,5%,1/16W,TP,1005	1	SNA
...4		2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	28	SNA
...4		2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	24	SA
...4		2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	8	SNA
...4		2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	15	SNA
...4		2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	SNA
...4		2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	13	SNA
...4		2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	3	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	21	SNA
...4		2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	2	SNA
...4		2007-000256	R-CHIP;1.6Kohm,1%,1/10W,TP,1608	3	SA
...4		2007-000265	R-CHIP;1.8Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-000583	R-CHIP;22Kohm,1%,1/10W,TP,1608	3	SA
...4		2007-000691	R-CHIP;3.3Mohm,5%,1/10W,TP,1608	1	SA
...4		2007-000726	R-CHIP;300ohm,1%,1/10W,TP,1608	2	SA
...4		2007-000775	R-CHIP;33Kohm,5%,1/16W,TP,1005	2	SNA
...4		2007-000803	R-CHIP;36Kohm,1%,1/10W,TP,1608	2	SA
...4		2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	8	SNA
...4		2007-001125	R-CHIP;68Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-001168	R-CHIP;75ohm,5%,1/4W,TP,3216	1	SA
...4		2007-001288	R-CHIP;18ohm,5%,1/16W,TP,1005	4	SA
...4		2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	3	SNA
...4		2007-001298	R-CHIP;51ohm,5%,1/16W,TP,1005	2	SNA
...4		2007-002970	R-CHIP;56ohm,5%,1/16W,TP,1005	2	SA
...4		2007-003015	R-CHIP;2.2ohm,5%,1/16W,TP,1005	8	SNA
...4		2007-003022	R-CHIP;62ohm,5%,1/16W,TP,1005	26	SNA
...4		2007-007001	R-CHIP;3.9Kohm,5%,1/16W,TP,1005	1	SA
...4		2007-007095	R-CHIP;390ohm,5%,1/16W,TP,1005	1	SA
...4		2007-007107	R-CHIP;100Kohm,1%,1/16W,TP,1005	6	SNA
...4		2007-007136	R-CHIP;4.7Kohm,1%,1/16W,TP,1005	18	SNA
...4		2007-007139	R-CHIP;47Kohm,1%,1/16W,TP,1005	1	SA
...4		2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	20	SNA
...4		2007-007156	R-CHIP;1ohm,5%,1/16W,TP,1005	2	SNA
...4		2007-007306	R-CHIP;100ohm,1%,1/16W,TP,1005	6	SNA
...4		2007-007309	R-CHIP;12Kohm,1%,1/16W,TP,1005,0.35	3	SA
...4		2007-007311	R-CHIP;22Kohm,1%,1/16W,TP,1005	1	SA
...4		2007-007312	R-CHIP;20Kohm,1%,1/16W,TP,1005	1	SA
...4		2007-007318	R-CHIP;1Kohm,1%,1/16W,TP,1005	16	SNA
...4		2007-007470	R-CHIP;7.5Kohm,1%,1/16W,TP,1005	1	SNA
...4		2007-007517	R-CHIP;240ohm,1%,1/16W,TP,1005	2	SNA
...4		2007-007538	R-CHIP;56Kohm,1%,1/16W,TP,1005	1	SA
...4		2007-007766	R-CHIP;2Kohm,1%,1/16W,TP,1005	1	SNA
...4		2007-007942	R-CHIP;1Mohm,1%,1/16W,TP,1005	1	SNA
...4		2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	19	SNA
...4		2007-008117	R-CHIP;2.7Kohm,1%,1/16W,TP,1005	1	SA
...4		2007-008275	R-CHIP;30Kohm,1%,1/16W,TP,1005	2	SNA
...4		2007-008294	R-CHIP;33ohm,1%,1/16W,TP,1005	5	SA
...4		2007-008298	R-CHIP;49.9ohm,1%,1/16W,TP,1005	4	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		2007-008332	R-CHIP;11.5Kohm,1%,1/16W,TP,1005	1	SA
...4		2007-008473	R-CHIP;59Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-008779	R-CHIP;0ohm,1%,1/16W,TP,1005	4	SA
...4		2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	2	SA
...4		2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	SA
...4		2011-001344	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,2	2	SA
...4		2011-001402	R-NETWORK;56ohm,5%,1/16W,L,CHIP,8P,TP,2.	8	SA
...4		2011-001449	R-NETWORK;22ohm,5%,1/16W,L,4P,TP,1010	3	SA
...4		2011-001506	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,4P,TP,1	4	SNA
...4		2011-001527	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,4P,TP,	3	SNA
...4		2011-001587	R-NETWORK;100ohm,5%,1/16W,L,CHIP-V,4P,TP	2	SNA
...4	AD480	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,TP,1005	8	SA
...4	AD480	2203-000278	C-CER,CHIP;0.01nF,0.5pF,50V,C0G,TP,1005	3	SA
...4	AD480	2203-000330	C-CER,CHIP;0.012nF,5%,50V,C0G,TP,1005	2	SA
...4	AD480	2203-000359	C-CER,CHIP;0.15nF,5%,50V,C0G,TP,1005,0.5	1	SNA
...4	AD480	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,TP,1005	16	SA
...4	AD480	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,TP,1005	5	SA
...4	AD480	2203-000575	C-CER,CHIP;220nF,10%,25V,X7R,TP,2012	6	SNA
...4	AD480	2203-000585	C-CER,CHIP;0.22nF,10%,50V,X7R,TP,1005	1	SA
...4	AD480	2203-000627	C-CER,CHIP;0.022nF,5%,50V,C0G,TP,1005	3	SNA
...4	AD480	2203-000679	C-CER,CHIP;0.027nF,5%,50V,C0G,TP,1005	2	SA
...4	AD480	2203-000714	C-CER,CHIP;3.3nF,10%,50V,X7R,TP,1005	7	SA
...4	AD480	2203-000812	C-CER,CHIP;0.033nF,5%,50V,C0G,TP,1005	5	SA
...4	AD480	2203-000940	C-CER,CHIP;0.47nF,10%,50V,X7R,TP,1005	4	SA
...4	AD480	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,TP,1005	21	SNA
...4	AD480	2203-002711	C-CER,CHIP;100nF,10%,25V,X7R,TP,1608	6	SA
...4	AD480	2203-005083	C-CER,CHIP;220nF,10%,50V,X7R,TP,1608,0.8	2	SA
...4	AD480	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	6	SNA
...4	AD480	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,0.5T	1	SNA
...4	AD480	2203-005659	C-CER,CHIP;0.18nF,5%,50V,NP0,TP,1005	1	SNA
...4	AD480	2203-005968	C-CER,CHIP;4.7nF,10%,50V,X7R,TP,1005,0.5	3	SNA
...4	AD480	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,1005	103	SA
...4	AD480	2203-006126	C-CER,CHIP;47nF,10%,16V,X7R,TP,1005	17	SNA
...4	AD480	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,TP,1005,0.5	20	SNA
...4	AD480	2203-006324	C-CER,CHIP;2200nF,10%,10V,X5R,TP,1608	7	SA
...4	AD480	2203-006348	C-CER,CHIP;1000nF,10%,25V,X5R,TP,1608,0.	2	SA
...4	AD480	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	25	SC
...4	AD480	2203-006399	C-CER,CHIP;1000nF,10%,6.3V,X5R,TP,1005	1	SA
...4	AD480	2203-006474	C-CER,CHIP;22000nF,20%,6.3V,X5R,TP,2012	34	SA
...4	AD480	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	18	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4	AD480	2203-006824	C-CER,CHIP;4700nF,10%,10V,X5R,TP,1608	5	SNA
...4	AD480	2203-006838	C-CER,CHIP;2200nF,10%,6.3V,X5R,TP,1005	1	SA
...4	AD480	2203-006841	C-CER,CHIP;1000nF,10%,16V,X5R,TP,1005	4	SNA
...4	AD480	2203-006842	C-CER,CHIP;0.47nF,5%,50V,C0G,TP,1005	2	SNA
...4	AD480	2203-006890	C-CER,CHIP;10000nF,20%,6.3V,X5R,TP,1608	30	SNA
...4	AD480	2203-006960	C-CER,CHIP;1000nF,10%,50V,X7R,TP,2012	1	SNA
...4	AD480	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,TP,1005	8	SNA
...4	AD480	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012,1	5	SNA
...4	AD480	2203-007269	C-CER,CHIP;22000nF,20%,10V,X5R,TP,2012,0	8	SNA
...4	AD480	2203-007270	C-CER,CHIP;10000nF,10%,10V,X5R,TP,1608,0	5	SNA
...4	AD480	2203-007513	C-CER,CHIP;10000nF,10%,10V,X5R,TP,1608,0	2	SA
...4	AD480	2203-007544	C-CER,CHIP;100nF,10%,50V,X7R,TP,1005,0.5	13	SA
...4		2402-001403	C-AL,SMD;100uF,20%,35V,TP,10.3X10.3	1	SNA
...4		2409-001213	C-ORGANIC,SMD;150uF,20%,6.3V,-,TP,3.5x2.	2	SNA
...4		2703-000158	INDUCTOR-SMD;1uH,10%,2012,40ohm,50mA,45,	4	SA
...4		2703-000213	INDUCTOR-SMD;470nH,10%,1608,1.35Ohm,35mA	1	SA
...4		2703-000408	INDUCTOR-SMD;3.3uH,20%,3225,28ohm,500mA	1	SA
...4		2703-001209	INDUCTOR-SMD;1.2uH,10%,1608,.8Ohm,25mA,3	3	SA
...4		2703-001938	INDUCTOR-SMD;56nH,5%,1005,1.5Ohm,200mA,1	2	SA
...4		2703-002332	INDUCTOR-SMD;330nH,5%,1608,3Ohm,100mA,32	1	SA
...4		2703-003713	INDUCTOR-SMD;1.5uH,20%,7366,0.015ohm,700	2	SA
...4		2703-003790	INDUCTOR-SMD;4.7uH,20%,8080,0.025ohm,450	2	SA
...4		2703-003930	INDUCTOR-SMD;4.7uH,20%,5050,0.072Ohm,245	4	SA
...4		2703-004462	INDUCTOR-SMD;3.3uH,20%,10x10x8mm,0.0082O	1	SA
...4		2703-004562	INDUCTOR-SMD;15uH,20%,10.3x10.2 mm,4.5T,	1	SNA
...4		2801-003773	CRYSTAL-SMD;12MHz,30ppm,28-AAN,20pF,50oh	1	SA
...4		3301-000314	BEAD-SMD;120ohm,1608,TP,120ohm/100MHz	6	SNA
...4		3301-001364	BEAD-SMD;1000ohm,1608,TP,1085ohm/108MHz,	2	SNA
...4		3301-002039	BEAD-SMD;26ohm,1608,TP	38	SA
...4		3601-001374	FUSE-SURFACE MOUNT;32V,5A,FAST-ACTING,PL	2	SA
...4		3701-001856	CONNECTOR-HDMI;19P,FEMALE,AU,0.5mm,BLK,S	2	SA
...4		3707-001106	CONNECTOR-OPTICAL;STRAIGHT W/L,SPDIF	1	SA
...4		3708-003073	CONNECTOR-FPC/FFC/PIC;51P,0.5mm,SMD,AU,N	1	SA
...4		3709-001712	CONNECTOR-CARD SLOT;68P,1.27mm,ANGLE,AU,	1	SA
...4	EH01	3711-008131	HEADER-BOARD TO CABLE;BOX,4P,1R,2.5mm,AN	1	SA
...4	EH01	3711-008453	HEADER-BOARD TO CABLE;BOX,18P,2R,2mm,ANG	1	SA
...4	EH01	3711-008558	HEADER-BOARD TO CABLE;BOX,26P,2R,1.25mm,	1	SA
...4		3722-003229	JACK-MODULAR;8P/8C W/L,Y,STRAIGHT,N,Au,1	1	SA
...4		3722-003248	JACK-USB;4P/1C(W/L),NI/PD/AU/SN,BLK,STRA	2	SA
...4	JACK PIN	3722-003546	JACK-PIN;5P+Screw hole,NI+SN,G,Y/BLU/RED	1	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		3722-003655	JACK-SCART;21P,SN,BLK	1	SA
...4		3722-003667	JACK-PHONE;1P/7C,SN/NI,BLK,STRAIGHT,3.6P	2	SA
...4	ET01	BN40-00291B	TUNER;GTCS2X-33B/K3-FNS,GTCS2X-33B/K3-FN	1	SA
...4		BN41-02272A	PCB MAIN;H5203,FR-4,4,A,1.2T,192*158,1	1	SNA
...4		BN97-08451A	ASSY MICOM-IRB;GOLF-P,U8FB,MAXQ636V,IC24	1	SNA
....5		BN13-00067A	PLD;MAXQ636V-2591+T,WLP,9	1	SNA
...4		BN97-08852A	ASSY MICOM-MAIN;T-NT14MDEUC-XXXX,U8MB,KL	1	SNA
....5		1107-002287	IC-EMMC;KLM4G1FEAC-C031,4GByte,BGA,153P,	1	SA
...4		BN97-08853A	ASSY MICOM-SUB;SUBMICOM,U8MB,W25Q40CLSSI	1	SNA
....5		1107-002226	IC-NOR FLASH;W25Q40CLSSIP,4Mbit,SOIC,8P,	1	SNA
1		BN92-15960A	ASSY P/MATERIAL;UH5200 58"	1	SNA
.2		0203-001595	TAPE-OPP MASKING;OPP-2,0.075,75,800M,CLR	3	SNA
.2		6902-001955	BAG ROLL;HDPE/PE FOAM,HDPE T0.018mm,T0.2	3	SNA
.2		6902-002233	BAG AIR;LDPE,-,T0.2,W900,L1850,TRP,-,-,-	1	SNA
.2		6922-000003	BAND PP;PP,T0.8,W18,L1650M,TRP,DA69-9014	1	SNA
.2		BN68-02422B	LABEL-WARNING SHIPPING;ALL MODEL,A/P,T0.	1	SNA
.2		BN69-03982N	PAD PACKING-EDGE;EDGE,PAPER,-,T5,W120,L2	1	SNA
.2		BN69-05418L	PACKING-BAG WRAPPING;-LDPE,-,-,T0.017,5	3	SNA
.2		BN69-06640E	PACKING-TRUCK PAD;TRUCK PAD,PAPER,-,-,DW	1	SNA
.2		BN69-06642B	PACKING-PAD;PAD,PAPER,-,-,CB-SW4,1500,11	1	SNA
.2		BN69-09624A	CUSHION-FRONT;UH6300-60,EPS	1	SNA
.2		BN69-10618A	CUSHION-SET;UH5200 58",EPS,Overseas	1	SNA
..3		0103-005099	RESIN EPS;BASF303,Natural,Natural	946	SNA
.2		BN69-11009F	PALLET;58" H5200,WOOD,17mm,1200,1570,144	1	SNA
1		BN92-16193F	ASSY BOX;H5203 58"	1	SNA
.2		BH68-00662A	LABEL BOX-01;ALL MODEL,ART PAPER,60,110,	1	SNA
.2		BN69-10784X	BOX-SET;58UH5273-SS,CB,A-01,DW3,YEL,W155	1	SNA
1		BN92-16194D	ASSY LABEL;UH5200 58"	1	SNA
.2		0203-001598	TAPE-FILAMENT;#8915,0.15,12,55000,CLR	0	SNA
.2		BN68-06129A	LABEL-HIGHLIGHT POP;H70XX, H65XX, H64XX,	1	SNA
.2		BN68-06511A	LEAFLET-QSG;H5203,SAMSUNG,wordless,EUROP	1	SNA
.2	T0527	BP68-00052B	LABEL-00,RATING;FPTV,PET,T0.05,93,73	1	SNA
1	ACCE1	BN92-16196F	ASSY ACCESSORY;UH5203	1	SNA
.2		BN68-05417B	LABEL-ENERGY;ALL,EDC,Polypropylene,T0.13	1	SNA
.2		BN96-34023C	ASSY ACCESSORY MANUAL;UH5203 58"	1	SNA
..3		6902-001964	BAG PE;LDPE,BIOBASED,T0.03,W200,L300,TRP	1	SNA
..3		BN68-00514K	MANUAL FLYER-05,WARRANTY CARD;comm,Samsu	1	SNA
..3		BN68-04972A	MANUAL FLYER-06,REGULATORY GUI;ALL,SAMSU	1	SNA
..3		BN68-05944R	LEAFLET-11,FICHE;UH55Series,EU,W/P,B5	1	SNA
..3		BN68-06373B	MANUAL USERS;UH5273,ENG/DEU/FRA/ITA,ZG,W	1	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
.2		BN96-34024B	ASSY ACCESSORY CABLE;UH5203 58"	1	SNA
..3	T0268	3903-000849	CBF-POWER CORD;DT,CEE,LP-21L,250V,2.5A,B	1	SC
..3		4301-000121	BATTERY-MN;1.5V,R03,10.5x44.5m,7.5g,AAA	2	SNA
..3		6902-001965	BAG PE;LDPE,BIOBASED,T0.05,W200,L300,TRP	1	SNA
..3	REMO2	BN59-01178B	REMOCON;TM1250A,49,3.0V,TM1250A_EUROPE(W	1	SA
..3	HOLDE	BN68-008370A	HOLDER-WIRE STAND;26UE4000 GUIDE STAND,P	1	SA
..3	T0527	BN68-00513A	LABEL-E,PASS;ALL MODEL,YUPO(110G),BLACK,	1	SNA
..3	CAIR	BN96-31644A	ASSY CABLE P;IR BLASTER,UL1185 28AWG,2.5	1	SA