


1. Exploded View & Part List

Exploded View

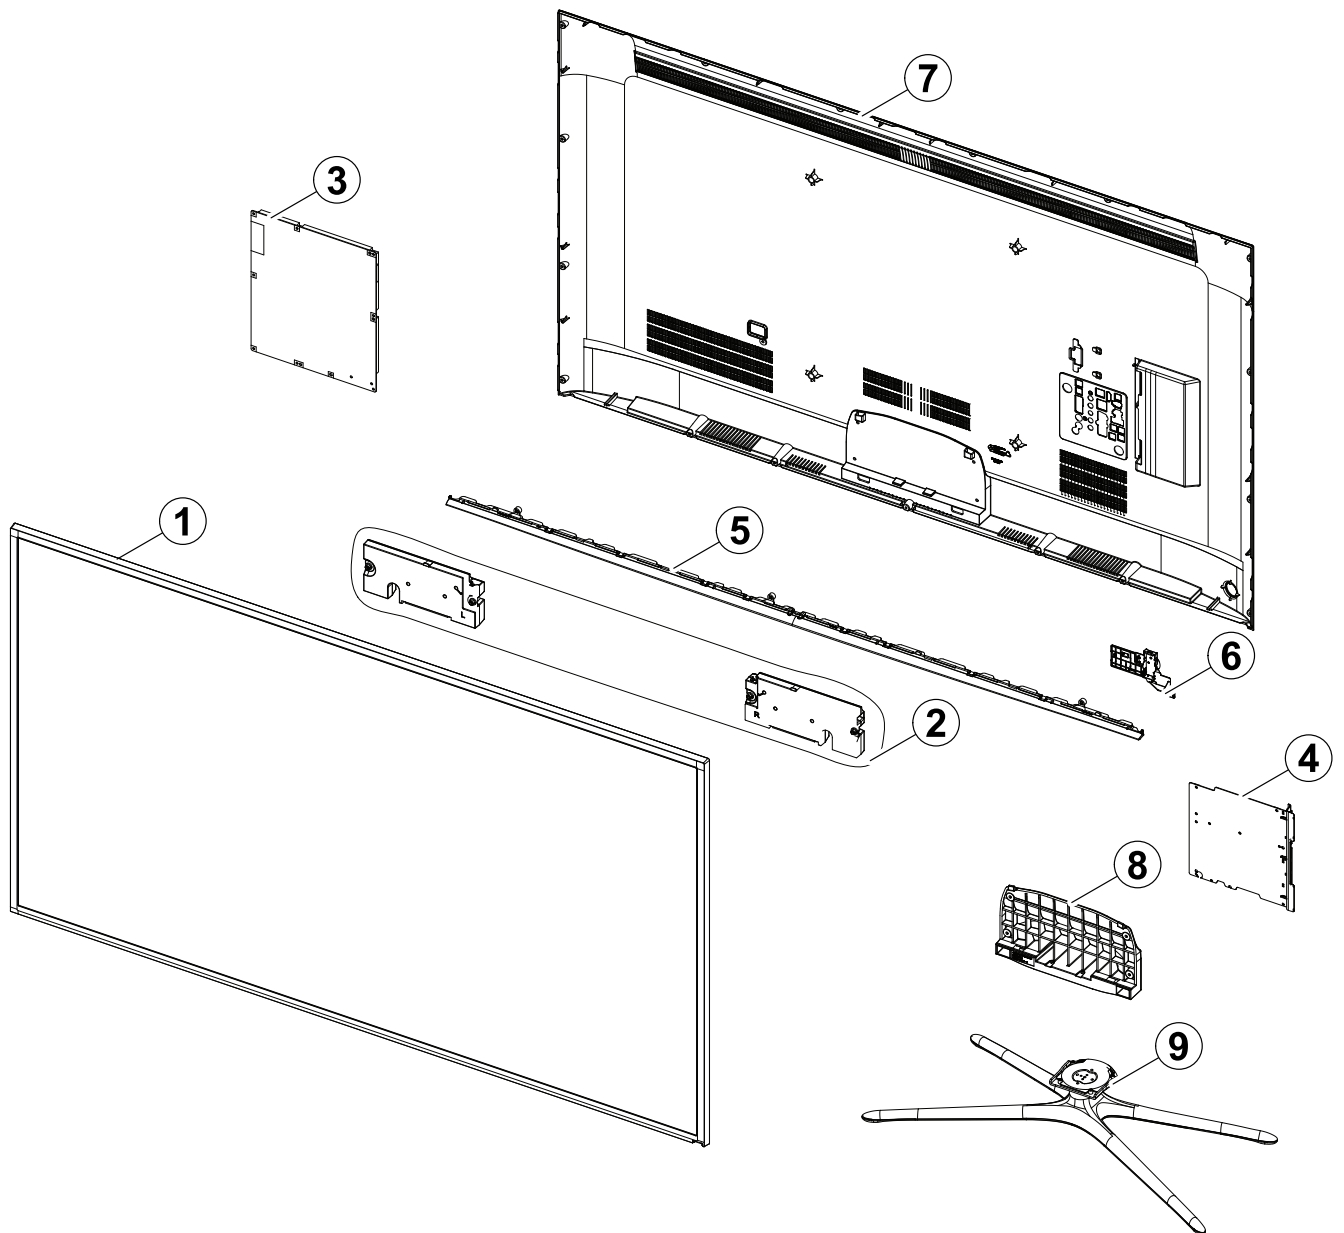

Parts List

No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
1	2	PANEL	BN95-01333A	PRODUCT LCD-SHARP; LQ600D3HD6K,CY-HH060CS	SA	1
2	2	SP01A	BN96-30334E	ASSY SPEAKER P; 6ohm,10W,Enclosure_H6k	SA	1
3	2	P001A	BN44-00712A	DC VSS-LED TV PD BD; L60X1T_EDY,L60X1T_ED	SA	1
4	2	M0014	BN94-07385M	ASSY PCB MAIN; UE60H6270SSXZG	SA	1
5	2	CD01A	BN95-01460A	ASSY DECORATION SMT; 6000,60,BLK	SA	1
6	2	FB01A	BN96-30902D	ASSY BOARD P-FUNCTION ASSY; UH6500,Functi	SA	1
7	2	R001A	BN96-32808G	ASSY COVER P-REAR; UH6270,60,XC(ON-TV),PC	SA	1
8	2	SG01A	BN96-31002A	ASSY GUIDE P-STAND; UH6400,60,PC+G/F 20%	SA	1
9	2	SB04A	BN96-30032A	ASSY STAND P-BASE; UF6K 60,ABS+PC,Chrome	SA	1

2. Electrical Parts List

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
			UE60H6270SSXZG (HD01)		
1		BN90-05252V	ASSY W/I;UH6K	1	SNA
.2		BN81-08159Z	PART SET-ELEC W/I;UF4~UF8,UH4~UH9 ELEC	1	SNA
.2		BN81-08368T	PART SET-MECH W/I;UH6K,U60HL*	1	SNA
1	S001A	BN90-05315B	ASSY STAND;UH6L,H6300	1	SNA
.2	SB04A	BN96-30032A	ASSY STAND P-BASE;UF6K 60,ABS+PC,Chrome	1	SA
..3	SCREW	6002-001294	SCREW-TAPPING;BH,+,M4,L16,ZPC(BLK)	4	SA
..3	SCREW	6003-001425	SCREW-TAPTYPE;BH,+,B,M4,L25,ZPC(BLK),SWR	4	SNA
..3	SCREW	6003-001785	SCREW-TAPTYPE;FH,+,B,M4,L8,ZPC(BLK),SWRC	4	SA
..3	SCREW	6003-001832	SCREW-TAPTYPE;FH,+,B,M4,L30,ZPC(BLK),SWR	1	SNA
..3		BN61-07165B	HOLDER-SWIVEL,TOP;60" QUAD STAND,ACETAL,	1	SNA
..3		BN61-08737A	HOLDER-SWIVEL,BOTTOM;46-55 SLIM QUAD STA	1	SNA
...4		0103-009825	RESIN-POM;TS-25A,Dark Gray,GY0199,HB	6	SNA
..3		BN61-08738A	HOLDER-STAND,NECK;46-55 SLIM QUAD STAND,	1	SNA
..3		BN61-08739A	BRACKET-STAND,TOP;46-55 SLIM QUAD STAND,	1	SNA
..3		BN61-08740A	BRACKET-STAND,BOTTOM;46-55 SLIM QUAD STA	1	SNA
..3		BN61-09955A	BRACKET-SWIVEL, TOP;UF6400 60 QUAD,SPCC,	1	SNA
..3		BN61-09957A	BRACKET-SWIVEL,BOTTOM;UF6400 60 QUAD,SPC	1	SNA
...4		BN61-02428Q	STUD-PEM;M4,D7,L9.3,PNA,ZPC(SIL),SUM24L	4	SNA
..3	AS080	BN63-05135E	SHEET-COVER;4-LEG,Rhcm PE Vinyl,T0.05,W6	2	SNA
..3		BN63-10158A	COVER-STAND,TOP-FRONT;46-55 SLIM QUAD ST	1	SNA
..3		BN63-10159A	COVER-STAND,TOP-REAR-LEFT;46-55 SLIM QUA	1	SNA
..3		BN63-10160A	COVER-STAND,TOP-REAR-RIGHT;46-55 SLIM QU	1	SNA
..3		BN63-10161A	COVER-STAND,BASE;46-55 SLIM QUAD STAND,A	1	SNA
..3		BN67-00385D	RUBBER-FOOT;RUBBER-FOOT,SILICONE,ROUND,1	4	SNA
.2	SG01A	BN96-31002A	ASSY GUIDE P-STAND;UH6400,60,PC+G/F 20%	1	SA
..3	SG03	BN61-10359A	GUIDE-STAND;UH6400 60",PC,G/F 20%	1	SNA
...4		0103-007285	RESIN-PC;MW32020GFU,K032202GFV,BK0007,V2	250	SNA
...4		BN68-00513D	LABEL-RESIN;resin,-,art paper,-,10,25,-,	1	SNA
..3		BN69-08751A	WRAP VINYL-SHRINK;STAND,PLASTIC OTHERS,P	0	SNA
..3		BN96-29120D	ASSY ACCESSORY-SCREW;6003-001807,8EA,LED	1	SNA
...4	SCREW	6003-001807	SCREW-TAPTYPE;BH,S,M4,L10,ZPC(BLK),SWRCH	8	SA
...4		BN69-09241D	PACKING-BAG-SCREW;LDPE,0.05,70,90,,TRP,	1	SNA
1	R001A	BN90-05680F	ASSY COVER REAR;UH6L,F6300,60"	1	SNA
.2	SCREW	6003-001782	SCREW-TAPTYPE;BH,+,B,M4,L12,ZPC(BLK),SWR	19	SA
.2	R001A	BN96-32808G	ASSY COVER P-REAR;UH6270,60,XC(ON-TV),PC	1	SA
..3	R001	BN63-11672H	COVER-REAR;H6.3K 60",ABS+PC,EO,ON TV	1	SNA
...4		0103-005041	RESIN PC ABS;FR3200TV,901408,BK0008,1.2m	3900	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...3		BN68-03518F	LABEL-STICKER-CI SLOT;WW,ALL,PET,0.1,134	1	SNA
...3		BN68-05603A	LABEL-E,PASS;ALL MODEL,ART PAPER 90G,60,	1	SNA
...3		BN68-05767H	LABEL-TERMINAL SIDE;H6400,PET,T0.125,14.	1	SNA
1		BN91-12105B	ASSY LCM-SHARP;BN95-01333A,CY-HH060CSSV1	1	SNA
.2	PANEL	BN95-01333A	PRODUCT LCD-SHARP;LQ600D3HD6K,CY-HH060CS	1	SA
...3	SCREW	6001-002756	SCREW-MACHINE;BH,+,M3,L6,ZPC(WHT),SWRCH1	6	SA
...3	SCREW	6001-003075	SCREW-MACHINE;BH,+,M3,L4,ZPC(WHT),SWRCH1	2	SA
...3		BN02-00114A	TAPE ETC-COF;NNB 55",PET,0.07T,20,12,GRE	8	SNA
...3		BN62-00507C	INSULATION-SOURCE PCB L;Y14 VNB 60",PC,0	1	SNA
...3		BN62-00507D	INSULATION-SOURCE PCB R;Y14 VNB 60",PC,0	1	SNA
...3		BN68-05722A	LABEL-STICKER;ALL MODEL,POLYPROPYLENE,0.	1	SNA
...3		BN90-05216A	ASSY MISC-BLU;H6400 60",CY-HH060CSSV	1	SNA
...4		BN02-00043D	TAPE ETC-SHEET FIXING;Y13 slim F-LED,PET	1	SNA
...4		BN02-00152H	TAPE ETC-SHEET FIXING;Y13 Slim F-LED,PET	3	SNA
...4		BN61-10113A	SUPPORT-PLATE;Y14 F-LED,PC,V2,CLEAR,OD-1	19	SNA
...4		BN61-10235A	LGP-DIFFUSER PLATE;60inch Diffuser Plat	1	SNA
...4		BN63-11823A	SHEET-COMPLEX;Y14 60inch NNB TMOP-4R,PET	1	SNA
...4		BN63-11828A	SHEET-REFLECTOR;Y14 60" VNB SY95S-188, L	1	SNA
...4		BN96-30433A	ASSY LED BAR P;60inch FHD Dire,FCpkg,8ea	7	SNA
...4		BN96-30434A	ASSY LED BAR P;60inch FHD Dire,FCpkg,5ea	7	SNA
...4		BN96-30649A	ASSY FRAME P-MOLD MIDDLE(U);H6400 60",PC	1	SNA
....5		BN61-10085A	FRAME-MOLD MIDDLE(UD);Y14 F-LED 60" (5.5	1	SNA
...4		BN96-30650A	ASSY FRAME P-MOLD MIDDLE(D);H6400 60",PC	1	SNA
....5		BN60-00744A	SPACER-RUBBER;Y13 F-LED SLIM,SH-0140U+AT	1	SNA
....5		BN60-00822B	SPACER-PANEL (UD);Y14 SF-LED 60,SILICON+	2	SNA
....5		BN61-10182A	FRAME-MOLD MIDDLE(D);Y14 F-LED 60" (5.5K	1	SNA
...4		BN96-30651A	ASSY FRAME P-MOLD MIDDLE(LR);H6400 60",P	2	SNA
....5		BN60-00823B	SPACER-PANEL (LR);Y14 SF-LED 60,SILICON+	2	SNA
....5		BN61-10086A	FRAME-MOLD MIDDLE(LR);Y14 F-LED 60" (5.5	2	SNA
...4		BN96-30652C	ASSY CHASSIS BOTTOM P;H6400 60,EGI-SECC	1	SNA
....5	M0909	AA63-01387A	GASKET-EMI,SPONGE;SP-P300M,Conductive Fa	2	SNA
....5	M0909	AA63-01388A	GASKET-EMI,SPONGE;SP-P300M,Conductive Fa	3	SA
....5		BN02-00040C	TAPE DOUBLE FACE-D-PLATE;F-LED ALL,MKT50	2	SNA
....5		BN02-00043D	TAPE ETC-SHEET FIXING;Y13 slim F-LED,PET	3	SNA
....5		BN02-00094A	TAPE PET;Y12 F-LED,MT-PFR,T 0.05,W30,L40	5	SNA
....5		BN02-00105A	TAPE ETC-CONNER;SNB,PET+D263-100H,0.05,8	6	SNA
....5		BN02-00325A	TAPE PET-SHEET FIXING;Y14 SF-LED 60" H6K	6	SNA
....5		BN61-10207A	HOLDER-WALL RIVET;Y14 F-LED 32",SWRCH10A	4	SNA
....5		BN62-00501F	INSULATION-PD BOARD;Y14 VNB 60_65,PC-(0.	1	SNA
....5	CC02	BN64-02521A	CHASSIS-BOTTOM;Y14 F-LED 60" (VNB),EGI-S	1	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
....5		BN96-30421A	ASSY BOARD P-LED INTERFACE B'D;60inch FH	1	SNA
...4		BN96-32143A	ASSY MISC P-REFLECTOR;Y14 VNB 60inch,SY9	1	SNA
...3	TCON	BN95-01336A	ASSY T CON;LQ600D3HD6K,Sharp 60F120Hz	1	SA
...4		BN62-00487A	HEAT SINK-ES;F6K,A6063,BLACK,18*14*4.4,t	1	SNA
...4		BN62-00573A	HEAT SINK-PS;F7000,A1050,BLACK,108*65.3*	1	SNA
...4		BN97-07994A	ASSY SMD;BN95-01336A	1	SNA
....5		0202-001899	SOLDER-CREAM;M705-GRN360-K2-VT,25-36um,S	1	SNA
....5		0404-001307	DIODE-SCHOTTKY;SSC54,40V,5000mA,DO-214AB	2	SA
....5		0404-001640	DIODE-SCHOTTKY;SS1060HEWS,60V,1000mA,SOD	2	SA
....5		0404-001643	DIODE-SCHOTTKY;B360A,60V,3000mA,SMA,TP	1	SA
....5		0404-001881	DIODE-SCHOTTKY;SS3040-HE,40V,3000mA,SOD-	2	SA
....5		0406-001438	DIODE-TVS;SMCJ14A,15.6/-/17.2V,1500W,DO-	1	SA
....5		0406-001445	DIODE-TVS;RClamp7512N,2.7/2.8/2.9,300W,S	2	SA
....5		0501-000465	TR-SMALL SIGNAL;MMBT3904,NPN,350mW,SOT-2	2	SA
....5		0502-001331	TR-POWER;NSS30100LT1G,PNP,310mW,SOT-23,T	1	SA
....5		0502-001346	TR-POWER;FCX591A,PNP,1000mW,SOT89,TR,30/	1	SA
....5		0502-001360	TR-POWER;STC405D,NPN,15000mW,TO-252	1	SA
....5		0505-000274	FET-SILICON;AO4435L,P,-30V,-11A,0.014ohm	5	SNA
....5		0505-002645	FET-SILICON;AOD4184A,N,40V,50A,0.007ohm,	1	SA
....5		0505-002790	FET-SILICON;ZXMP6A17G,P,-60V,-4.3A,0.190	1	SA
....5		0505-002925	FET-SILICON;AO4438,N,60V,8.2A,3.1W,SOT-8	1	SA
....5		0505-002937	FET-SILICON;AO4854L,DUAL N,30V,8A,2W,SOT	1	SA
....5	EL02	0601-002037	LED;SMD(TOP VIEW),BLUE,1.6x0.8mm,465/470	3	SA
....5		1003-002412	IC-LEVEL DRIVER;MAX17079GTL+,TR,40P,6x6x	1	SA
....5		1105-002274	IC-DDR3 SDRAM;K4B1G1646G-BCMA,DDR3 1866,	1	SNA
....5		1201-002980	IC-OP AMP;MAX9650ATA+,TDFN-EP,TP,8P,3*3m	4	SA
....5		1203-007552	IC-DC/DC CONVERTER;TPS56921PWPR,HTSSOP,2	1	SA
....5		1203-007608	IC-DC/DC CONVERTER;ISL24827,QFN,48Z30,7x	1	SA
....5		1203-008045	IC-DC/DC CONVERTER;SN1304025RHBR,QFN,32P	1	SNA
....5		1204-003485	IC-VIDEO PROCESS;SDP1316,HSFCBGA,888P,27	1	SA
....5		1205-004222	IC-MULTIPLIER;THV3056,64P,9x9x0.9mm,PLAS	1	SA
....5	IS01	1209-002183	IC-SENSOR;S-5851AAA-M6T1U,SOT,6Z30,2.9x1	1	SA
....5		1405-001381	VARISTOR;11V,8VDC,30A,1.6x0.8x0.9mm,TP,2	3	SA
....5		2007-000029	R-CHIP;0ohm,5%,1/8W,TP,2012	2	SC
....5		2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	SA
....5		2007-000052	R-CHIP;10Kohm,1%,1/10W,TP,1608	7	SA
....5		2007-000060	R-CHIP;100Kohm,1%,1/10W,TP,1608	2	SNA
....5		2007-000066	R-CHIP;20Kohm,1%,1/10W,TP,1608	1	SNA
....5		2007-000067	R-CHIP;15Kohm,1%,1/10W,TP,1608	1	SNA
....5		2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	1	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
....5		2007-000109	R-CHIP;1Mohm,5%,1/10W,TP,1608	1	SA
....5		2007-000123	R-CHIP;1.5Kohm,5%,1/10W,TP,1608	1	SA
....5		2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	9	SNA
....5		2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	7	SNA
....5		2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	7	SA
....5		2007-000149	R-CHIP;12Kohm,5%,1/16W,TP,1005	2	SA
....5		2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	SNA
....5		2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	69	SNA
....5		2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	2	SNA
....5		2007-000231	R-CHIP;1.3Kohm,1%,1/10W,TP,1608	1	SA
....5		2007-000256	R-CHIP;1.6Kohm,1%,1/10W,TP,1608	1	SA
....5		2007-000336	R-CHIP;120Kohm,1%,1/10W,TP,1608	1	SA
....5		2007-000491	R-CHIP;2.2Kohm,1%,1/10W,TP,1608	1	SA
....5		2007-000614	R-CHIP;24Kohm,1%,1/10W,TP,1608	1	SNA
....5		2007-000726	R-CHIP;300ohm,1%,1/10W,TP,1608	1	SA
....5		2007-000736	R-CHIP;30Kohm,1%,1/10W,TP,1608	1	SA
....5		2007-000744	R-CHIP;30ohm,5%,1/10W,TP,1608	1	SA
....5		2007-000772	R-CHIP;33Kohm,1%,1/10W,TP,1608	1	SA
....5		2007-000779	R-CHIP;33ohm,1%,1/10W,TP,1608	1	SA
....5		2007-000857	R-CHIP;4.3Kohm,1%,1/10W,TP,1608	2	SNA
....5		2007-000910	R-CHIP;43Kohm,1%,1/10W,TP,1608	1	SA
....5		2007-000913	R-CHIP;43Kohm,5%,1/10W,TP,1608	1	SA
....5		2007-001038	R-CHIP;56Kohm,1%,1/10W,TP,1608	2	SA
....5		2007-001090	R-CHIP;620ohm,1%,1/10W,TP,1608	1	SA
....5		2007-001096	R-CHIP;62Kohm,1%,1/10W,TP,1608	2	SNA
....5		2007-001125	R-CHIP;68Kohm,1%,1/10W,TP,1608	2	SA
....5		2007-001206	R-CHIP;82Kohm,1%,1/10W,TP,1608	1	SNA
....5		2007-001237	R-CHIP;910ohm,1%,1/10W,TP,1608	1	SA
....5		2007-001298	R-CHIP;51ohm,5%,1/16W,TP,1005	8	SNA
....5		2007-001433	R-CHIP;12Kohm,1%,1/10W,TP,1608	1	SA
....5		2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	4	SNA
....5		2007-002768	R-CHIP;6.2Kohm,1%,1/10W,TP,1608	1	SA
....5		2007-007107	R-CHIP;100Kohm,1%,1/16W,TP,1005	4	SNA
....5		2007-007132	R-CHIP;15Kohm,1%,1/16W,TP,1005	1	SA
....5		2007-007134	R-CHIP;39Kohm,1%,1/16W,TP,1005	1	SA
....5		2007-007135	R-CHIP;18Kohm,1%,1/16W,TP,1005	1	SNA
....5		2007-007136	R-CHIP;4.7Kohm,1%,1/16W,TP,1005	15	SNA
....5		2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	6	SNA
....5		2007-007229	R-CHIP;360ohm,1%,1/10W,TP,1608	1	SA
....5		2007-007239	R-CHIP;31.6Kohm,1%,1/10W,TP,1608	1	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
....5		2007-007306	R-CHIP;100ohm,1%,1/16W,TP,1005	6	SNA
....5		2007-007309	R-CHIP;12Kohm,1%,1/16W,TP,1005,0.35	1	SA
....5		2007-007310	R-CHIP;8.2Kohm,1%,1/16W,TP,1005	2	SA
....5		2007-007311	R-CHIP;22Kohm,1%,1/16W,TP,1005	1	SA
....5		2007-007312	R-CHIP;20Kohm,1%,1/16W,TP,1005	1	SA
....5		2007-007315	R-CHIP;3.9Kohm,1%,1/16W,TP,1005	2	SNA
....5		2007-007316	R-CHIP;3.3Kohm,1%,1/16W,TP,1005	4	SNA
....5		2007-007318	R-CHIP;1Kohm,1%,1/16W,TP,1005	5	SNA
....5		2007-007431	R-CHIP;91Kohm,1%,1/10W,TP,1608	3	SA
....5		2007-007455	R-CHIP;24.9Kohm,1%,1/10W,TP,1608	1	SA
....5		2007-007463	R-CHIP;1.1Kohm,1%,1/16W,TP,1005	1	SA
....5		2007-007517	R-CHIP;240ohm,1%,1/16W,TP,1005	3	SNA
....5		2007-007590	R-CHIP;82Kohm,1%,1/16W,TP,1005	1	SNA
....5		2007-007627	R-CHIP;16Kohm,1%,1/16W,TP,1005	1	SA
....5		2007-007651	R-CHIP;9.1Kohm,1%,1/10W,TP,1608	2	SA
....5		2007-007721	R-CHIP;560ohm,1%,1/10W,TP,1608	1	SA
....5		2007-007723	R-CHIP;75Kohm,1%,1/10W,TP,1608	1	SA
....5		2007-007766	R-CHIP;2Kohm,1%,1/16W,TP,1005	5	SNA
....5		2007-007767	R-CHIP;200ohm,1%,1/16W,TP,1005	1	SA
....5		2007-007942	R-CHIP;1Mohm,1%,1/16W,TP,1005	2	SNA
....5		2007-007981	R-CHIP;180Kohm,1%,1/16W,TP,1005	1	SNA
....5		2007-008137	R-CHIP;24Kohm,1%,1/16W,TP,1005	1	SNA
....5		2007-008167	R-CHIP;120Kohm,1%,1/16W,TP,1005	2	SC
....5		2007-008263	R-CHIP;3Kohm,1%,1/16W,TP,1005	1	SA
....5		2007-008294	R-CHIP;33ohm,1%,1/16W,TP,1005	1	SA
....5		2007-008714	R-CHIP;0.01ohm,1%,1W,TP,6432	2	SA
....5		2011-001264	R-NETWORK;10ohm,5%,1/16W,L,CHIP,8P,TP,2.	14	SNA
....5		2011-001344	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,2	3	SA
....5		2011-001427	R-NETWORK;0ohm,5%,1/16W,L,CHIP,8P,TP,2.0	3	SA
....5	AD480	2203-000311	C-CER,CHIP;0.12nF,5%,50V,C0G,TP,1005	1	SA
....5	AD480	2203-000332	C-CER,CHIP;0.012nF,5%,50V,C0G,TP,1608	2	SA
....5	AD480	2203-000359	C-CER,CHIP;0.15nF,5%,50V,C0G,TP,1005,0.5	1	SNA
....5	AD480	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,TP,1005	2	SA
....5	AD480	2203-000575	C-CER,CHIP;220nF,10%,25V,X7R,TP,2012	1	SNA
....5	AD480	2203-000585	C-CER,CHIP;0.22nF,10%,50V,X7R,TP,1005	1	SA
....5	AD480	2203-000627	C-CER,CHIP;0.022nF,5%,50V,C0G,TP,1005	3	SNA
....5	AD480	2203-000714	C-CER,CHIP;3.3nF,10%,50V,X7R,TP,1005	3	SA
....5	AD480	2203-000888	C-CER,CHIP;4.7nF,10%,50V,X7R,TP,1608	1	SA
....5	AD480	2203-000940	C-CER,CHIP;0.47nF,10%,50V,X7R,TP,1005	1	SA
....5	AD480	2203-000995	C-CER,CHIP;0.047nF,5%,50V,C0G,TP,1005	4	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
....5	AD480	2203-001153	C-CER,CHIP;0.068nF,5%,50V,NP0,TP,1005	1	SA
....5	AD480	2203-001587	C-CER,CHIP;18nF,10%,50V,X7R,1608	1	SA
....5	AD480	2203-002050	C-CER,CHIP;47nF,10%,50V,X7R,TP,1608	3	SA
....5	AD480	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,TP,1005	8	SNA
....5	AD480	2203-002398	C-CER,CHIP;22nF,10%,50V,X7R,TP,1608	2	SNA
....5	AD480	2203-002711	C-CER,CHIP;100nF,10%,25V,X7R,TP,1608	15	SA
....5	AD480	2203-002720	C-CER,CHIP;10nF,10%,25V,X7R,TP,1005,0.5T	2	SNA
....5	AD480	2203-002982	C-CER,CHIP;6.8nF,10%,50V,X7R,TP,1005	1	SA
....5	AD480	2203-005138	C-CER,CHIP;1.8nF,10%,50V,X7R,TP,1005	3	SA
....5	AD480	2203-005221	C-CER,CHIP;15nF,10%,50V,X7R,TP,1608	1	SNA
....5	AD480	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	6	SNA
....5	AD480	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,0.5T	8	SNA
....5	AD480	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,1005	7	SA
....5	AD480	2203-006090	C-CER,CHIP;10000nF,10%,6.3V,X5R,TP,2012	2	SA
....5	AD480	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,TP,1005,0.5	95	SNA
....5	AD480	2203-006348	C-CER,CHIP;1000nF,10%,25V,X5R,TP,1608,0.	6	SA
....5	AD480	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	2	SC
....5	AD480	2203-006377	C-CER,CHIP;4700nF,10%,25V,X5R,TP,2012	2	SNA
....5	AD480	2203-006474	C-CER,CHIP;22000nF,20%,6.3V,X5R,TP,2012	12	SA
....5	AD480	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	9	SNA
....5	AD480	2203-006698	C-CER,CHIP;1000nF,10%,25V,X7R,TP,1608,0.	9	SNA
....5	AD480	2203-006824	C-CER,CHIP;4700nF,10%,10V,X5R,TP,1608,-	1	SNA
....5	AD480	2203-006890	C-CER,CHIP;10000nF,20%,6.3V,X5R,TP,1608	4	SNA
....5	AD480	2203-006960	C-CER,CHIP;1000nF,10%,50V,X7R,TP,2012	3	SNA
....5	AD480	2203-007240	C-CER,CHIP;22000nF,20%,6.3V,X5R,TP,1608,	4	SA
....5	AD480	2203-007270	C-CER,CHIP;10000nF,10%,10V,X5R,TP,1608,0	20	SNA
....5	AD480	2203-007306	C-CER,CHIP;10000nF,10%,25V,X5R,TP,2012,1	45	SNA
....5	AD480	2203-007425	C-CER,CHIP;2200nF,10%,25V,X5R,TP,1608,0.	2	SNA
....5	AD480	2203-007486	C-CER,CHIP;1000nF,10%,50V,X5R,TP,1608	1	SNA
....5	AD480	2203-007600	C-CER,CHIP;220nF,10%,50V,X7R,TP,1608	1	SA
....5	AD480	2203-008096	C-CER,CHIP;2200nF,10%,50V,X5R,TP,2012,1.	1	SA
....5	AD480	2203-008315	C-CER,CHIP;22000nF,20%,25V,X5R,TP,2012,1	4	SA
....5	AD480	2203-008412	C-CER,CHIP;4700nF,10%,50V,X5R,TP,2012,1.	3	SNA
....5		2409-001118	C-POLYMER ,CHIP;47uF,20%,10V,WT,TP,3.5X2	1	SA
....5		2703-003747	INDUCTOR-SMD;22uH,20%,6060,0.135ohm,1300	1	SA
....5		2703-003790	INDUCTOR-SMD;4.7uH,20%,8080,0.025ohm,450	1	SA
....5		2703-003803	INDUCTOR-SMD;4.7uH,20%,6060,0.031ohm,270	1	SA
....5		2703-003862	INDUCTOR-SMD;10uH,20%,6060,0.065ohm,1900	1	SA
....5		2703-003937	INDUCTOR-SMD;1uH,20%,7.0x6.47x3.0mm,0.00	1	SA
....5		2703-004847	INDUCTOR-SMD;4.7uH,20%,3838,1.8T,0.075Oh	4	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
....5		2801-005324	CRYSTAL-SMD;27MHz,30ppm,Ceramic SMD(4pin	1	SA
....5		2901-001362	FILTER-EMI/ESD;5.5V,0A,50pF,2.05x1.25x0.	3	SNA
....5		3301-001404	BEAD-SMD;30ohm,2012,TP,15.9OHM/30MHz,-	2	SA
....5		3301-002039	BEAD-SMD;26ohm,1608,TP	17	SA
....5		3601-001402	FUSE;125V,7A,FAST ACTING,CERAMIC,2.69X6.	1	SNA
....5		3708-003043	CONNECTOR-FPC/FFC/PIC;80P,0.5mm,SMD-A+DI	2	SA
....5		3708-003073	CONNECTOR-FPC/FFC/PIC;51P,0.5mm,SMD,AU,N	1	SA
....5	EH01	3711-005601	HEADER-BOARD TO CABLE;BOX,8P,1R,2mm,SMD-	1	SA
....5		6302-001290	GASKET;SMR-TS-4-4.5-3,4.0mm,Ni+Au+SUS+Mg	4	SNA
....5		BN41-02132A	PCB-T CON;2014 SHARP FHD 120Hz,FR-4,4,1.	1	SNA
....5		BN97-08171A	ASSY MICOM;H60H1F005_5517_140217,2014.02	1	SNA
....6		1107-002224	IC-FLASH MEMORY;W25X40CLSSIG,4Mbit,SOP,8	1	SNA
..3		BN96-30084A	ASSY OPEN CELL;LQ600D3HD6K,1920*1080,60"	1	SNA
...4		BN81-08338A	AS-DRIVER IC;DRIVER IC,S6C277G3,miniLVDS	1	SNA
...4		BN81-08339A	AS-GATE IC;GATE IC,LH16E001,272ch, 2pf,	1	SNA
...4		BN81-09554A	AS-SOURCE PCB;SOURCE PCB,RUNTK5530TPZZ,F	1	SNA
...4		BN81-09555A	AS-SOURCE PCB;SOURCE PCB,RUNTK5531TPZZ,F	1	SNA
...4		BN81-09556A	AS-SOURCE PCB;SOURCE PCB,RUNTK5532TPZZ,F	1	SNA
...4		BN81-09557A	AS-SOURCE PCB;SOURCE PCB,RUNTK5533TPZZ,F	1	SNA
...4		BN81-09559A	AS-POL-C/F;POLARIZER-C/F,PFILV1868TPXZ,A	1	SNA
...4		BN81-09560A	AS-POL-TFT;POLARIZER-TFT,PFILV1869TPXZ,P	1	SNA
..3	TC01A	BN96-30743A	ASSY CHASSIS TOP P;Y14 F-LED 60"(6,PC+AB	1	SA
...4		BN60-00930N	SPACER-TOP(UD);Y14 NNB 60",GASKET+PET,L1	2	SNA
...4		BN60-00930P	SPACER-TOP(LR);Y14 NNB 60",GASKET+PET,L7	2	SNA
...4		BN60-00983B	SPACER-GASKET;Y13 SF-LED,GASKET(FG200A),	3	SNA
...4	AS080	BN63-07556X	SHEET-COVER;F-LED 3D VE,PO-SHEET,T0.068,	3	SNA
...4	AS080	BN63-07556Z	SHEET-COVER;Y13 SF-LED,PO-SHEET,T0.068,W	1	SNA
...4	AS080	BN63-10945C	SHEET-COVER;Y13 SF-LED,PO-SHEET,T0.068,W	1	SNA
...4	FW04	BN64-02480A	WINDOW-RMC;UH5500 40",PC,V2,Violet, T25%	1	SNA
...4	AC157	BN64-02498A	CHASSIS-TOP;Y14 F-LED 60" (5.5K-6K),PC+A	1	SNA
..3	OC-TC	BN96-30783B	ASSY CABLE P-FFC;H6000,FFC,NH,57mm 1,80	2	SNA
..3	SB05A	BN96-31500A	ASSY BRACKET P-STAND LINK;UH6300,6400,EG	2	SNA
...4		BN61-02932L	BRACKET-STOPPER NUT;LED TV,M3,D5.5,L7.5,	2	SNA
...4	CB18	BN61-10361A	BRACKET-STAND LINK;UH6K,EGI-SECC,T2.0	2	SNA
1		BN91-12194H	ASSY SHIELD;H6200,60,EUROPE	1	SNA
.2	SCREW	6001-003081	SCREW-MACHINE;PWH,+,M3,L5,ZPC(WHT),SWRCH	10	SA
.2		BN02-00102B	TAPE FILAMENT;UE7000,#8917,0.15,25,50,WH	0	SNA
.2	EC13	BN39-01884B	LEAD CONNECTOR;UN40H5200AF,Lead Connecto	1	SA
.2	EC13	BN39-01887H	LEAD CONNECTOR;UE60H6400,Flat Connector,	1	SA
.2	M-F	BN39-01888S	LEAD CONNECTOR-FUNCTION;UH6400 55/60",Le	1	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
.2	P001A	BN44-00712A	DC VSS-LED TV PD BD;L60X1T_EDY,L60X1T_ED	1	SA
.2	WIFI	BN59-01174A	NETWORK-WIFI MODULE;WIDT-30Q,Internal Wi	1	SA
.2	HOLDER-LED SCREW	BN61-09175B	HOLDER-LED SCREW;UD 110,SWRCH18A,10,3,BH	2	SA
.2	CD01A	BN95-01460A	ASSY DECORATION SMT;6000,60,BLK	1	SA
...3		0203-001269	TAPE-OPP MASKING;#301,T0.06,W75,L50000,N	0	SNA
...3		BN01-00160A	TARGET-CHROMIUM-CY;Chromium target,99.95	0	SNA
...3		BN01-00161A	TARGET-CHROMIUM-PL;chromium target,99.95	0	SNA
...3		BN01-00168A	COATING-AFS;99.5% AFS,99.50%,1.5,AF Sput	0	SNA
...3	FD01	BN63-11682A	COVER-DECORATION;UH6300-60,PC+ABS+G/F15%	1	SNA
...4		0103-010111	RESIN-PC ABS;230GNH15,BLACK,BK0007,V1	220	SNA
...4	AS080	BN63-05135E	SHEET-COVER;4-LEG,Rhem PE Vinyl,T0.05,W6	1	SNA
...3	AS108	BN63-12354B	SHEET-PROTECTION;H6300,PET,0.04,W23mm,10	1	SNA
...3		BN69-10522B	PACKING-TRAY;TRAY 60",PAPER,-,-,30,554,1	1	SNA
...3		BN69-10523C	BOX-SMT;60" SMT DECORATION,PAPER,-,-,330	1	SNA
.2	BT	BN96-30218B	ASSY BOARD P-BT HOLDER;BT Module, Assy H	1	SA
.2	SP01A	BN96-30334E	ASSY SPEAKER P;6ohm,10W,Enclosure_H6k	1	SA
.2	FB01A	BN96-30902D	ASSY BOARD P-FUNCTION ASSY;UH6500,Functi	1	SA
.2	LVDS	BN96-31530L	ASSY CABLE P-FFC;UE60H6400,FFC,NH,500mm,	1	SA
1	M0017	BN91-12364M	ASSY CHASSIS;UE60H6270SSXZG	1	SNA
.2	M0014	BN94-07385M	ASSY PCB MAIN;UE60H6270SSXZG	1	SA
...3		BN61-10370A	HOLDER-SIDE AV;UH6400,HIPS,UO	1	SNA
...4		0103-004628	RESIN-HIPS;HF-1690H,K2901,BK0020,1.5mm H	13	SNA
...3		BN62-00365B	HEAT SINK-PS;F 4k,5k,6k,A1050,ANODIZING,	1	SNA
...3		BN62-00367A	PAD GAP;F6400,SILICON,35 35 mm,6.5,Grey,	1	SNA
...3		BN97-08070D	ASSY SMD;UH6K,H6200,EUROPE,H6200	1	SNA
...4		0202-001899	SOLDER-CREAM;M705-GRN360-K2-VT,25-36um,S	5	SNA
...4	DS01A	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	SA
...4	DR01A	0402-001614	DIODE-RECTIFIER;S1G,400V,1A,DO-214AC,TP	1	SA
...4		0403-001783	DIODE-ZENER;BZB84-C6V2,5.8/6.6V,300mW,SO	4	SNA
...4		0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	4	SA
...4		0404-001881	DIODE-SCHOTTKY;SS3040-HE,40V,3000mA,SOD-	3	SA
...4		0406-001200	DIODE-TVS;RCLAMP0504F,6/-V,150W,SC-70	3	SA
...4		0406-001290	DIODE-TVS;3.0SMCJ20A,22.2/-24.5V,3000W,	1	SNA
...4		0406-001628	DIODE-TVS;AOZ8804ADI,6/-V,150W,SLP2510	1	SA
...4		0406-001635	DIODE-TVS;SMF5.0A,6.4V, 6.7V, 7V,200W,SM	9	SA
...4		0501-000279	TR-SMALL SIGNAL;KSA1182-Y,PNP,150mW,SOT-	2	SA
...4		0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	6	SC
...4		0505-002560	FET-SILICON;AO6415,P,-20V,-3.3A,0.15ohm,	1	SA
...4		0505-002598	FET-SILICON;AP2317GN,P,-20V,-4.2A,0.052o	1	SA
...4		0505-002893	FET-SILICON;AO4801AS,P,-30V,-5A,2W,SOIC-	1	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		0505-002917	FET-SILICON;AO3406,N,30V,3.6A,1.4W,SOT-2	2	SA
...4		0505-003397	FET-SILICON;2N7002K,N,60V,380mA,1.19ohm,	10	SA
...4		0801-002780	IC-CMOS LOGIC;74LVC1G17,SCHMITT-TRIGGER	2	SA
...4		0801-003330	IC-CMOS LOGIC;Octal buffer,DQFN,20P,4.5x	4	SA
...4		1001-001860	IC-ANALOG SWITCH;NX5L2750CGU,QFN,10P,1.4	1	SNA
...4		1103-001564	IC-EEPROM;S-24C512CI-J800,512Kbit,64Kx8,	1	SA
...4		1105-002528	IC-DDR3 SDRAM;K4B4G1646D-BCMA,DDR3 1866,	1	SA
...4		1105-002534	IC-DDR3 SDRAM;K4B2G1646Q-BCMA,DDR3 SDRAM	2	SA
...4		1201-003183	IC-AUDIO AMP;DRV612,HTSSOP,14P,5x4.4mm,D	1	SA
...4		1201-003671	IC-AUDIO AMP;NTP7414,MLF,48P,7x7mm,DUAL,	1	SA
...4		1203-004364	IC-VOL. DETECTOR;RT9818C-42PV,SOT-23,3P,	1	SA
...4		1203-006017	IC-VOL. DETECTOR;RT9824GJ8,TSOT23,8P,2.9	1	SA
...4		1203-006109	IC-POSIFIXED REG.;S-1206B33-M3T1G,SOT-2	1	SA
...4		1203-007211	IC-POSIFIXED REG.;G9915-12T45U,TO-252,3	1	SA
...4		1203-007238	IC-PWM CONTROLLER;TPS54427,DDA,8P,4.8x3.	2	SNA
...4		1203-007242	IC-POSILADJUST REG.;G2992BP11U,SOP-8,8P,	1	SA
...4		1203-007694	IC-DC/DC CONVERTER;SN1106041DDAR,DDA,8Z3	1	SA
...4		1203-007697	IC-DC/DC CONVERTER;LNBH26SPQR,QFN,24Z30,	1	SNA
...4		1203-007984	IC-DC/DC CONVERTER;AOZ3015PI,SO-8,8P,6.2	1	SA
...4		1203-008104	IC-POSIFIXED REG.;S-13A1D18-E8001,HSOP,	2	SNA
...4		1203-008105	IC-POSIFIXED REG.;S-13A1D33-E8001,HSOP,	1	SNA
...4		1203-008118	IC-DC/DC CONVERTER;AOZ3013PI,SO-8,8P,4.9	1	SNA
...4		1203-008183	IC-DC/DC CONVERTER;AOZ3015PI-1,EPAD SO-8	1	SA
...4		1204-003535	IC-DECODER;SEMS31T,PBGA,709P,23x23mm,PLA	1	SA
...4		1205-004447	IC-SWITCH;TPS2051CDBVR,SOT23-5,5P,3x1.65	3	SA
...4		1205-004983	IC-SWITCH;BD82032FVJ,TSSOP-B8J,8P,3.0x4.	1	SA
...4		1405-001271	VARISTOR;35V,20Vdc,5A,1.0x0.5x0.6mm,TP,1	29	SA
...4		2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	17	SNA
...4		2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	35	SA
...4		2007-000142	R-CHIP;2.7Kohm,5%,1/16W,TP,1005	1	SNA
...4		2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	43	SNA
...4		2007-000147	R-CHIP;8.2Kohm,5%,1/16W,TP,1005	1	SA
...4		2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	39	SA
...4		2007-000153	R-CHIP;22Kohm,5%,1/16W,TP,1005	6	SNA
...4		2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	17	SNA
...4		2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	SNA
...4		2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	16	SNA
...4		2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	7	SNA
...4		2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	17	SNA
...4		2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	2	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		2007-000503	R-CHIP;2.2ohm,5%,1/10W,TP,1608	4	SA
...4		2007-000695	R-CHIP;3.3ohm,5%,1/10W,TP,1608	5	SNA
...4		2007-000803	R-CHIP;36Kohm,1%,1/10W,TP,1608	2	SA
...4		2007-000831	R-CHIP;39Kohm,5%,1/16W,TP,1005	1	SA
...4		2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	SNA
...4		2007-001116	R-CHIP;680ohm,1%,1/10W,TP,1608	1	SA
...4		2007-001125	R-CHIP;68Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-001168	R-CHIP;75ohm,5%,1/4W,TP,3216	1	SA
...4		2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	12	SNA
...4		2007-001295	R-CHIP;39ohm,5%,1/16W,TP,1005	1	SNA
...4		2007-001301	R-CHIP;68ohm,5%,1/16W,TP,1005	3	SA
...4		2007-001313	R-CHIP;330ohm,5%,1/16W,TP,1005	2	SNA
...4		2007-001325	R-CHIP;3.3Kohm,5%,1/16W,TP,1005	1	SNA
...4		2007-001333	R-CHIP;18Kohm,5%,1/16W,TP,1005	2	SNA
...4		2007-002970	R-CHIP;56ohm,5%,1/16W,TP,1005	4	SA
...4		2007-003015	R-CHIP;2.2ohm,5%,1/16W,TP,1005	4	SNA
...4		2007-007001	R-CHIP;3.9Kohm,5%,1/16W,TP,1005	1	SA
...4		2007-007107	R-CHIP;100Kohm,1%,1/16W,TP,1005	4	SNA
...4		2007-007135	R-CHIP;18Kohm,1%,1/16W,TP,1005	4	SNA
...4		2007-007136	R-CHIP;4.7Kohm,1%,1/16W,TP,1005	1	SNA
...4		2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	4	SNA
...4		2007-007156	R-CHIP;1ohm,5%,1/16W,TP,1005	3	SNA
...4		2007-007306	R-CHIP;100ohm,1%,1/16W,TP,1005	4	SNA
...4		2007-007311	R-CHIP;22Kohm,1%,1/16W,TP,1005	5	SA
...4		2007-007312	R-CHIP;20Kohm,1%,1/16W,TP,1005	1	SA
...4		2007-007316	R-CHIP;3.3Kohm,1%,1/16W,TP,1005	1	SNA
...4		2007-007318	R-CHIP;1Kohm,1%,1/16W,TP,1005	35	SNA
...4		2007-007470	R-CHIP;7.5Kohm,1%,1/16W,TP,1005	2	SNA
...4		2007-007488	R-CHIP;75Kohm,1%,1/16W,TP,1005	1	SNA
...4		2007-007517	R-CHIP;240ohm,1%,1/16W,TP,1005	3	SNA
...4		2007-007538	R-CHIP;56Kohm,1%,1/16W,TP,1005	1	SA
...4		2007-007671	R-CHIP;11Kohm,1%,1/16W,TP,1005	2	SA
...4		2007-007766	R-CHIP;2Kohm,1%,1/16W,TP,1005	3	SNA
...4		2007-007942	R-CHIP;1Mohm,1%,1/16W,TP,1005	1	SNA
...4		2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	8	SNA
...4		2007-008275	R-CHIP;30Kohm,1%,1/16W,TP,1005	1	SNA
...4		2007-008294	R-CHIP;33ohm,1%,1/16W,TP,1005	1	SA
...4		2007-008332	R-CHIP;11.5Kohm,1%,1/16W,TP,1005	1	SA
...4		2007-008779	R-CHIP;0ohm,1%,1/16W,TP,1005	2	SA
...4		2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	8	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		2011-001262	R-NETWORK;22ohm,5%,1/16W,L,CHIP,8P,TP,2.	2	SA
...4		2011-001344	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,2	4	SA
...4		2011-001345	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,8P,TP,2	1	SA
...4		2011-001449	R-NETWORK;22ohm,5%,1/16W,L,4P,TP,1010	6	SA
...4		2011-001506	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,4P,TP,1	3	SNA
...4		2011-001527	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,4P,TP,	2	SNA
...4		2011-001587	R-NETWORK;100ohm,5%,1/16W,L,CHIP-V,4P,TP	4	SNA
...4	AD480	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,TP,1005	7	SA
...4	AD480	2203-000278	C-CER,CHIP;0.01nF,0.5pF,50V,C0G,TP,1005	4	SA
...4	AD480	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,TP,1005	13	SA
...4	AD480	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,TP,1005	9	SA
...4	AD480	2203-000530	C-CER,CHIP;2.7nF,10%,50V,X7R,TP,1005,-	2	SNA
...4	AD480	2203-000627	C-CER,CHIP;0.022nF,5%,50V,C0G,TP,1005	1	SNA
...4	AD480	2203-000679	C-CER,CHIP;0.027nF,5%,50V,C0G,TP,1005	2	SA
...4	AD480	2203-000714	C-CER,CHIP;3.3nF,10%,50V,X7R,TP,1005	4	SA
...4	AD480	2203-000812	C-CER,CHIP;0.033nF,5%,50V,C0G,TP,1005	5	SA
...4	AD480	2203-000995	C-CER,CHIP;0.047nF,5%,50V,C0G,TP,1005	4	SA
...4	AD480	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,TP,1005	13	SNA
...4	AD480	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	4	SNA
...4	AD480	2203-002711	C-CER,CHIP;100nF,10%,25V,X7R,TP,1608	2	SA
...4	AD480	2203-005083	C-CER,CHIP;220nF,10%,50V,X7R,TP,1608,0.8	3	SA
...4	AD480	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	12	SNA
...4	AD480	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,0.5T	3	SNA
...4	AD480	2203-005642	C-CER,CHIP;0.22nF,5%,50V,NP0,TP,1005	1	SNA
...4	AD480	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,1005	99	SA
...4	AD480	2203-006126	C-CER,CHIP;47nF,10%,16V,X7R,TP,1005	11	SNA
...4	AD480	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,TP,1005,0.5	7	SNA
...4	AD480	2203-006260	C-CER,CHIP;220nF,10%,10V,X5R,TP,1005,-	8	SNA
...4	AD480	2203-006324	C-CER,CHIP;2200nF,10%,10V,X5R,TP,1608	7	SA
...4	AD480	2203-006348	C-CER,CHIP;1000nF,10%,25V,X5R,TP,1608,0.	5	SA
...4	AD480	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	11	SC
...4	AD480	2203-006399	C-CER,CHIP;1000nF,10%,6.3V,X5R,TP,1005	1	SA
...4	AD480	2203-006474	C-CER,CHIP;22000nF,20%,6.3V,X5R,TP,2012	21	SA
...4	AD480	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	19	SNA
...4	AD480	2203-006636	C-CER,CHIP;220nF,10%,25V,X7R,TP,1608	2	SA
...4	AD480	2203-006824	C-CER,CHIP;4700nF,10%,10V,X5R,TP,1608,-	7	SNA
...4	AD480	2203-006842	C-CER,CHIP;0.47nF,5%,50V,C0G,TP,1005	1	SNA
...4	AD480	2203-006890	C-CER,CHIP;10000nF,20%,6.3V,X5R,TP,1608	24	SNA
...4	AD480	2203-006960	C-CER,CHIP;1000nF,10%,50V,X7R,TP,2012	1	SNA
...4	AD480	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,TP,1005	2	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4	AD480	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012,1	6	SNA
...4	AD480	2203-007240	C-CER,CHIP;22000nF,20%,6.3V,X5R,TP,1608,	2	SA
...4	AD480	2203-007269	C-CER,CHIP;22000nF,20%,10V,X5R,TP,2012,0	35	SNA
...4	AD480	2203-007270	C-CER,CHIP;10000nF,10%,10V,X5R,TP,1608,0	4	SNA
...4	AD480	2203-007401	C-CER,CHIP;10000nF,10%,50V,X5R,TP,3225	2	SA
...4	AD480	2203-007513	C-CER,CHIP;10000nF,10%,10V,X5R,TP,1608,0	6	SA
...4	AD480	2203-007544	C-CER,CHIP;100nF,10%,50V,X7R,TP,1005	4	SA
...4	AD480	2203-008096	C-CER,CHIP;2200nF,10%,50V,X5R,TP,2012,1.	1	SA
...4		2703-000158	INDUCTOR-SMD;1uH,10%,2012,.40ohm,50mA,45,	4	SA
...4		2703-000213	INDUCTOR-SMD;470nH,10%,1608,1.35Ohm,35mA	1	SA
...4		2703-000408	INDUCTOR-SMD;3.3uH,20%,3225,.28ohm,500mA	1	SA
...4		2703-001938	INDUCTOR-SMD;56nH,5%,1005,1.5Ohm,200mA,1	1	SA
...4		2703-003149	INDUCTOR-SMD;2.2uH,20%,5050,0.055Ohm,300	1	SA
...4		2703-003713	INDUCTOR-SMD;1.5uH,20%,7366,0.015ohm,700	3	SA
...4		2703-003790	INDUCTOR-SMD;4.7uH,20%,8080,0.025ohm,450	2	SA
...4		2703-003930	INDUCTOR-SMD;4.7uH,20%,5050,0.072Ohm,245	4	SA
...4		2703-004868	INDUCTOR-SMD;6.8uH,20%,5050,4.0T,0.043Oh	1	SA
...4		2801-003326	CRYSTAL-SMD;24MHz,30ppm,28-ABX,20pF,50oh	1	SA
...4		3301-000314	BEAD-SMD;120ohm,1608,TP,120ohm/100MHz	7	SNA
...4		3301-002039	BEAD-SMD;26ohm,1608,TP	35	SA
...4		3601-001374	FUSE-SURFACE MOUNT;32V,5A,FAST-ACTING,PL	1	SA
...4		3701-001856	CONNECTOR-HDMI;19P,2ROW,FEMALE,SMD-S,AU	2	SA
...4		3701-001861	CONNECTOR-HDMI;19P,2ROW,FEMALE,SMD-A,AU	2	SA
...4		3707-001106	CONNECTOR-OPTICAL;STRAIGHT W/L,SPDIF	1	SA
...4		3708-003073	CONNECTOR-FPC/FFC/PIC;51P,0.5mm,SMD,AU,N	1	SA
...4		3710-003908	CONNECTOR-SOCKET;64P,2R,0.5mm,SMD-S,AU,B	1	SA
...4	EH01	3711-008131	HEADER-BOARD TO CABLE;BOX,4P,1R,2.5mm,AN	1	SA
...4	EH01	3711-008453	HEADER-BOARD TO CABLE;BOX,18P,2R,2mm,ANG	1	SA
...4	EH01	3711-008558	HEADER-BOARD TO CABLE;BOX,26P,2R,1.25mm,	1	SA
...4		3722-003229	JACK-MODULAR;8P/8C W/L,Y,STRAIGHT,N,Au,1	1	SA
...4		3722-003457	JACK-USB;4P/1C,NI,BLK,A	3	SA
...4	JACK PIN	3722-003546	JACK-PIN;5P+Screw hole,NI+SN,G,Y/BLU/RED	1	SA
...4		3722-003617	JACK-PHONE;14P/2C,SN,BLK,STRAIGHT,3.6PI,	1	SA
...4		3722-003655	JACK-SCART;21P,SN,BLK	1	SA
...4	ET01	BN40-00292A	TUNER;DNSS243IH286A,DNSS243IH286A,DVB-TC	1	SA
...4		BN41-02156A	PCB MAIN;X14H, EU, LED 6 Series,FR-4,4,A	1	SNA
...4		BN97-08274A	ASSY MICOM;T-MST14DEUC-XXXX,X14H,U8DC,EU	1	SNA
....5		1107-002290	IC-EMMC;MTFC4GMCAM-1M WT,4Gbyte,BGA,153P	1	SA
...4		BN97-08278A	ASSY MICOM;T-MST14DEUS-1004,2014.02.27	1	SNA
....5		1107-002226	IC-NOR FLASH;W25Q40CLSSIP,4Mbit,SOIC,8P,	1	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		BN97-08425A	ASSY MICOM-BLASTER;Blaster-Version:*.**,	1	SNA
....5		BN13-00067A	PLD;MAXQ636V-2584+T,WLP,9	1	SNA
..3		BN97-08279A	ASSY DRM-KEY;H6*,EU,X14	1	SNA
...4		BN46-00109H	KEY CODE-CERTIFI;MAC,TV/AV,General	1	SNA
...4		BN46-00110N	KEY CODE-CERTIFI;MIRACAST,TV,X12 /X13	1	SNA
...4		BN46-00115K	KEY CODE-CERTIFI;CI+,TV,X14, EU	1	SNA
1	ACCE1	BN92-14019A	ASSY ACCESSORY;UH6K,H6200,EUROPE	1	SNA
.2		BN68-05417A	LABEL-02,ENERGY;ALL,EDC,Polypropylene,T0	1	SNA
.2		BN96-30874A	ASSY ACCESSORY CABLE;UH6K,H6200,EUROPE	1	SNA
..3		3709-001791	CONNECTOR-CARD SLOT;64P,0.5mm,SMD-A,AU,P	1	SA
..3	T0268	3903-000849	CBF-POWER CORD;DT,CEE,LP-21L,250V,2.5A,B	1	SA
..3		4301-000121	BATTERY-MN;1.5V,R03,10.5x44.5m,7.5g,AAA	2	SNA
..3		6902-001965	BAG PE;LDPE,BIOBASED,T0.05,W200,L300,TRP	1	SNA
..3	REMO2	BN59-01178B	REMOCON;TM1250A,49,3.0V,TM1250A_EUROPE(W	1	SA
..3	HOLDER	BN68-08370A	HOLDER-WIRE STAND;26UE4000 GUIDE STAND,N	1	SA
..3	CAIR	BN96-31644A	ASSY CABLE P;IR BLASTER,UL1185 28AWG,LS0	1	SA
.2		BN96-30875A	ASSY ACCESSORY MANUAL;UH6K,H6200,EUROPE	1	SNA
..3		6902-001964	BAG PE;LDPE,BIOBASED,T0.03,W200,L300,TRP	1	SNA
..3	T0527	BN68-00513A	LABEL-E,PASS;ALL MODEL,YUPO(110G),BLACK,	1	SNA
..3		BN68-00514K	MANUAL FLYER-04,WARRANTY CARD;comm,Samsu	1	SNA
..3		BN68-04972A	MANUAL FLYER-03,REGULATORY GUI;ALL,SAMSU	1	SNA
..3		BN68-05808A	MANUAL USERS-01;H6260,ZG,ENG/DEU/FRA/ITA	1	SNA
..3		BN68-05944L	LEAFLET-02,FICHE;UH6200,W/P,B5	1	SNA
1		BN92-14020G	ASSY LABEL;UH6K,H6200,EUROPE	1	SNA
.2		0203-001598	TAPE-FILAMENT;#8915,0.15,12,55000,CLR	0	SNA
.2		BN68-05820A	LEAFLET-QSG;H6200/6270/6220,SAMSUNG,word	1	SNA
.2		BN68-06129A	LABEL-HIGHLIGHT POP;H70XX, H65XX, H64XX,	1	SNA
.2	T0527	BP68-00052B	LABEL-00,RATING;FPTV,PET,T0.05,93,73	1	SNA
1		BN92-14021K	ASSY BOX;UH6200,60,Europe	1	SNA
.2		BH68-00662A	LABEL BOX-01;ALL MODEL,ART PAPER,60,110,	1	SNA
.2		BN69-09968F	BOX-SET,OUT;60H6270-QS,CB,C-03,DW3,YEL,W	1	SNA
.2		BN69-09969A	BOX-SET,IN;60H6300-QS,CB,-,C-01,DW1,YEL,	1	SNA
1		BN92-14034E	ASSY P/MATERIAL;H6200,60,EUROPE	1	SNA
.2		0203-001595	TAPE-OPP MASKING;OPP-2,0.075,75,800M,CLR	2	SNA
.2		6902-000379	BAG AIR;LDPE,T0.2,W1000,L1800,TRP,1260.0	1	SNA
.2		6902-001955	BAG ROLL;HDPE/PE FOAM,HDPE T0.018mm,T0.2	3	SNA
.2		6922-000003	BAND PP;PP,T0.8,W18,L1650M,TRP,DA69-9014	1	SNA
.2	T0214	AA61-20285C	HOLDER-BOX;CORAL,PP,BLACK,HB,17.5g	4	SNA
.2		BN68-02422B	LABEL-WARNING SHIPPING;ALL MODEL,A/P 100	1	SNA
.2		BN69-03982N	PAD PACKING-EDGE;EDGE,PAPER,-,T5,W120,L2	1	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
.2		BN69-05418A	PACKING-BAG WRAPPING;-LDPE,-,0,019,500,	4	SNA
.2		BN69-06640E	PACKING-TRUCK PAD;TRUCK PAD,PAPER,-,-,DW	1	SNA
.2		BN69-06642B	PACKING-PAD;PAD,PAPER,-,-,CB-SW4,1500,11	1	SNA
.2		BN69-07609Z	PALLET;-WOOD,-,1700,1170,135,-,-,sesk-1	1	SNA
.2		BN69-09612A	CUSHION-SET;UH6300-60,EPS	1	SNA
.2		BN69-09624A	CUSHION-FRONT;UH6300-60,EPS	1	SNA
..3		0103-005099	RESIN-EPS;BASF303,Natural,Natural	195	SNA